



# INTEGRATED CIRCUIT

## TECHNICAL DATA

# TA7680AP, TA7681AP

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT  
SILICON MONOLITHIC

TELEVISION PIF + SIF SYSTEM

TA7680AP....FOR FET TUNER

TA7681AP....FOR NPN TUNER

### FUNCTIONS

#### PIF

- . Three Controlled IF Amplifier Stages
- . Video Demodulator Controlled by Picture Carrier
- . Black Noise and White Noise Inverter
- . Peak AGC
- . DC Amplifier for RF AGC Out

#### SIF

- . Three Differential IF Amplifier Stages
- . Phase Detector
- . DC Controlled Attenuator
- . Audio Amplifier Stage with NFB Terminal

### FEATURES

- . PIF, SIF, ATT AUDIO DRIVER
- . 2 Chip Color TV System is Possible with TA7644BP


#### PIF

- . High Gain, Wide Band IF Amplifier
- . AGC Characteristics with Excellent Stability
- . Excellent DG/DP Characteristics
- . Excellent S/N Characteristics Due to Delayed 3 Stages AGC Action
- . Negative Video Output Signal
- . Switch Off the Video Part with VTR SW

#### SIF

- . Excellent Limitter Characteristics
- . Excellent Attenuator Characteristics

Unit in mm

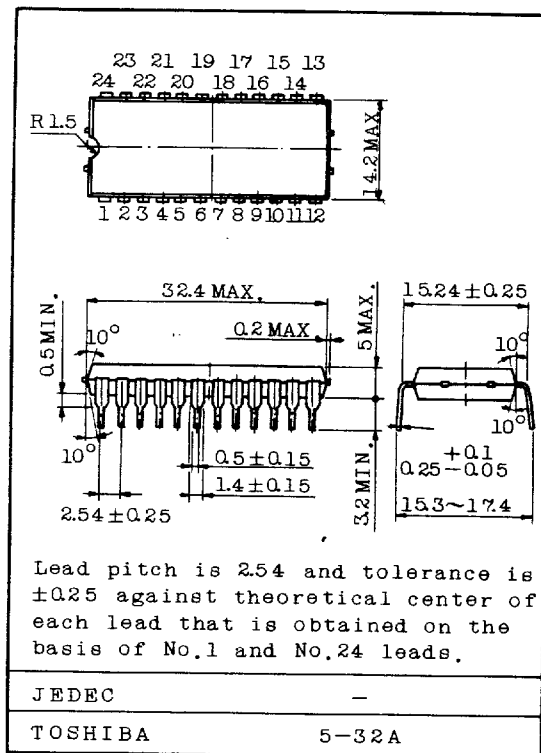

9097247 0019619 284

1983-3-30

TOSHIBA CORPORATION

EJ3-TA7680AP-1



# INTEGRATED CIRCUIT


## TECHNICAL DATA

TA7680AP, TA7681AP

### MAXIMUM RATINGS ( $T_a=25^{\circ}\text{C}$ )

| CHARACTERISTIC           | SYMBOL    | RATING    | UNIT               |
|--------------------------|-----------|-----------|--------------------|
| Supply Voltage           | $V_{CC}$  | 15        | V                  |
| Terminal 11 Open Voltage | $V_{11}$  | 15        | V                  |
| Video DC Output Current  | $I_{15}$  | 6         | mA                 |
| Audio DC Output Current  | $I_3$     | 3         | mA                 |
| Terminal 2 Voltage       | $V_2$     | 15        | V                  |
| Power Dissipation (Note) | $P_D$     | 1.6       | W                  |
| Operating Temperature    | $T_{opr}$ | -20 ~ 65  | $^{\circ}\text{C}$ |
| Storage Temperature      | $T_{stg}$ | -55 ~ 150 | $^{\circ}\text{C}$ |

Note : Derated above  $T_a=25^{\circ}\text{C}$  in the proportion of  $12.8\text{mW}/^{\circ}\text{C}$ .

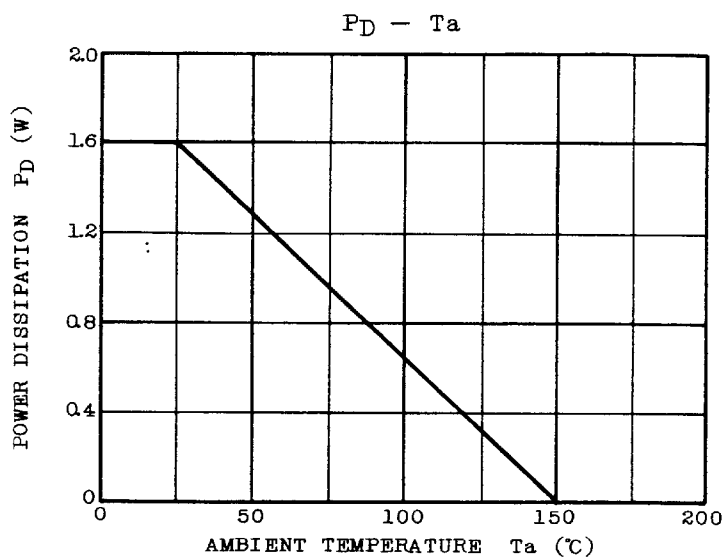

■ 9097247 0019620 TT6 ■




# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### BLOCK DIAGRAM

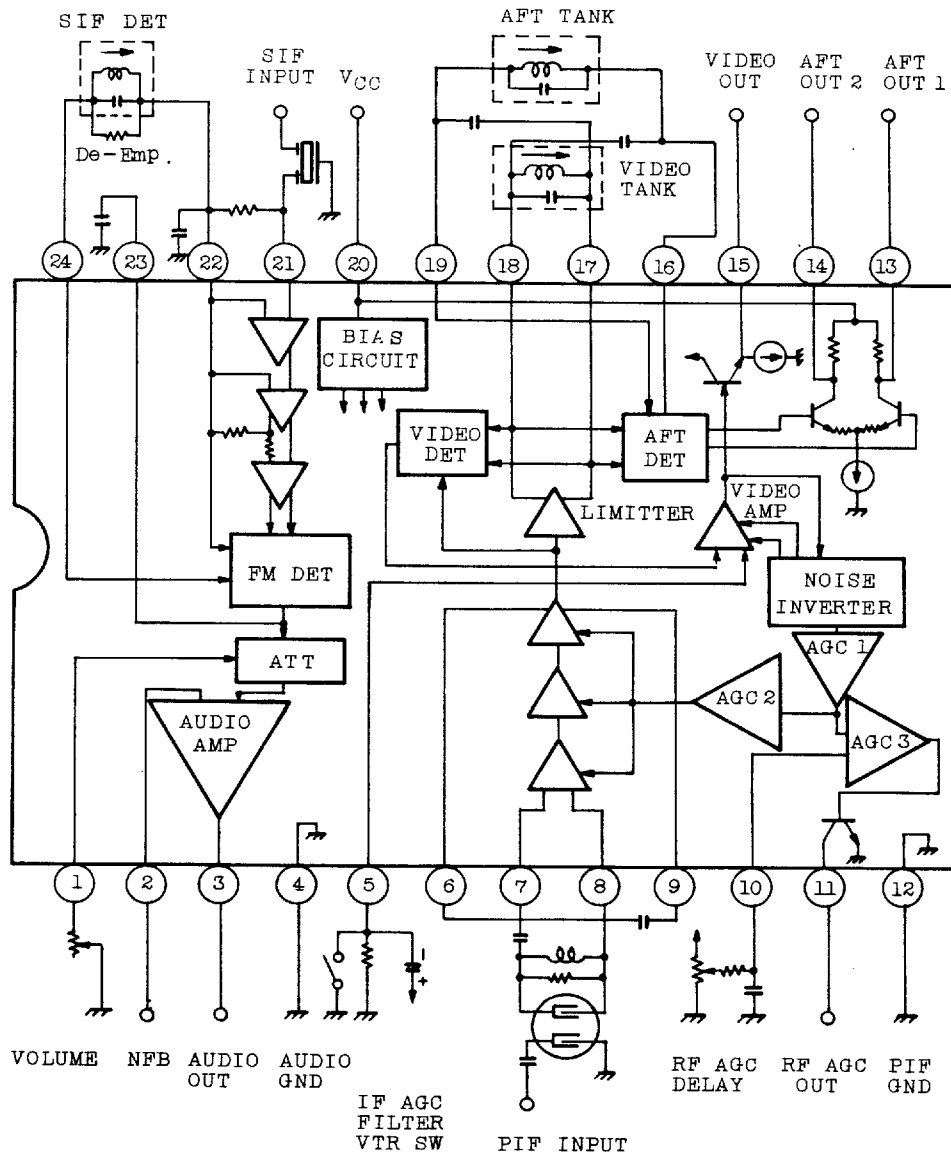

9097247 0019621 932

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-3



# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

ELECTRICAL CHARACTERISTICS (Ta=25°C, VCC=12V, fp=58.75MHz, fs=54.25MHz)  
PIF SECTION

| CHARACTERISTIC                 | SYMBOL              | TEST CIR-<br>CUIT | TEST CONDITION                          | MIN. | TYP. | MAX. | UNIT              |
|--------------------------------|---------------------|-------------------|---|------|------|------|-------------------|
| Recommended Supply Voltage     | VCC                 | -                 | -                                       | 10.8 | 12.0 | 13.2 | V                 |
| Supply Current                 | ICC                 | 1                 | -                                       | 50   | 72   | 95   | mA                |
| Video DC Output Voltage        | V15                 | 1                 | SW1:1(TA7680AP)<br>2(TA7681AP)<br>SW2:2 | 5.2  | 5.5  | 5.8  | V                 |
| AFT DC Output Voltage          | V13                 | 1                 | SW1:1(TA7680AP)<br>2(TA7681AP)<br>SW2:2 | 5.3  | 6.8  | 8.3  | V                 |
|                                | V14                 | 1                 | SW1:1(TA7680AP)<br>2(TA7681AP)<br>SW2:2 | 5.3  | 6.8  | 8.3  | V                 |
| AFT DC Offset Voltage          | $\Delta V_{13-14}$  | 1                 | SW1:1(TA7680AP)<br>2(TA7681AP)<br>SW2:2 | -1.5 | 0    | 1.5  | V                 |
| RF AGC Residual Output Voltage | V11 SAT             | 1                 | SW1:1(TA7680AP)<br>2(TA7681AP)<br>SW2:2 | -    | -    | 0.5  | V                 |
| RF AGC Leak Current            | I11 LEAK            | 1                 | SW1:1(TA7681AP)<br>2(TA7680AP)<br>SW2:1 | -    | -    | 1    | $\mu A$           |
| Video Sensitivity              | $v_i$<br>PIN7-8     | 2                 | (Note 1)                                | 60   | 150  | 250  | $\mu V_{rms}$     |
| AGC Range                      | $\Delta A_{PIF}$    | 2                 | (Note 2)                                | 60   | 64   | -    | dB                |
| Sync Tip Level Voltage         | VSYNC<br>(V15)      | 2                 | (Note 3)                                | 2.3  | 2.5  | 2.7  | V                 |
| Max. IF Input Voltage          | $v_{IN MAX}$<br>PIF | 2                 | (Note 4)                                | 100  | 120  | -    | mV <sub>rms</sub> |
| White Noise Threshold Level    | VWTH<br>(V15)       | 2                 | (Note 5)                                | 5.8  | 6.2  | 6.6  | V                 |
| White Noise Clamp Level        | VWCL<br>(V15)       | 2                 | (Note 5)                                | 3.7  | 4.1  | 4.5  | V                 |

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-4

GT1A12

9097247 0019622 879



# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

| CHARACTERISTIC                |       | SYMBOL                               | TEST CIR-CUIT | TEST CONDITION                                    | MIN. | TYP. | MAX. | UNIT              |
|-------------------------------|-------|--------------------------------------|---------------|---|------|------|------|-------------------|
| Black Noise Threshold Level   |       | $V_B^{TH}$<br>(V15)                  | 2             | (Note 5)  | 1.4  | 1.6  | 1.8  | V                 |
| Black Noise Clamp Level       |       | $V_B^{CL}$<br>(V15)                  | 2             | (Note 5)  | 2.9  | 3.3  | 3.7  | V                 |
| Video Frequency Response      |       | $f_{BW}$                             | 3             | (Note 6)  | 4.5  | 5.5  | -    | MHz               |
| Suppression of Carrier        |       | CL                                   | 4             | (Note 7)  | 40   | 50   | -    | dB                |
| Suppression of 2nd Carrier    |       | I <sub>2nd</sub>                     | 4             | (Note 8)  | 40   | 50   | -    | dB                |
| 920kHz Beat Level             |       | I <sub>920</sub>                     | 4             | (Note 9)  | 33   | 38   | -    | dB                |
| Differential Phase            |       | DP                                   | 5             | (Note 10)   | -    | 3.5  | 5    | deg               |
| Differential Gain             |       | DG                                   | 5             | (Note 10)   | -    | 7    | 10   | %                 |
| PIF Input Impedance           |       | R <sub>IN</sub> (PIF)                | 6             | (Note 11)   | 1.5  | 3.0  | 6.0  | kΩ                |
|                               |       | C <sub>IN</sub> (PIF)                |               |   | -    | 3.0  | 10.0 | pF                |
| AFT Sensitivity               |       | $\Delta F/V_{13-14}$                 | 2             | (Note 12)   | -    | 16   | -    | kHz/V             |
| AFT Output Voltage            | Upper | V <sub>13U</sub><br>V <sub>14U</sub> | 2             | (Note 13)   | 11.7 | 11.9 | 1.20 | V                 |
|                               | Lower | V <sub>13L</sub><br>V <sub>14L</sub> | 2             | (Note 13)   | 1.8  | 2.3  | 2.8  | V                 |
| RF AGC Max. Available Current |       | I <sub>4</sub> MAX                   | 1             | TA7680AP SW <sub>1</sub> :1<br>SW <sub>2</sub> :1 | 0.3  | -    | -    | mA                |
|                               |       |                                      |               | TA7681AP SW <sub>1</sub> :2<br>SW <sub>2</sub> :1 | 7.0  | -    | -    |                   |
| RF AGC Delay Setting Range    |       | V <sub>IN</sub><br>DELAY             |               | (Note 14)   | 5    | 7    | 9    | V                 |
| AFT Band Width                |       | $\Delta F_W$                         | 2             | (Note 13)   | 1.4  | -    | -    | MHz               |
| Video Output Voltage          |       | $v_{OUT}$                            | 2             | (Note 15)   | 2.25 | 2.5  | 2.75 | V                 |
| SIF Output Voltage            |       | S <sub>OUT</sub>                     | 3             | (Note 16)   | 200  | 400  | 600  | mV <sub>rms</sub> |

9097247 0019623 705

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-5

GT1A12



# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### SIF SECTION

| CHARACTERISTIC              |             | SYMBOL             | TEST CIR-CUIT | TEST CONDITION  | MIN. | TYP. | MAX. | UNIT          |
|-----------------------------|-------------|--------------------|---------------|---|------|------|------|---------------|
| Input Limiting Voltage      |             | $v_{IN(LIM)}$      | 8             | (Note 17) $R_D = \infty$  | -    | 200  | 400  | $\mu V_{rms}$ |
| AM Rejection Ratio          |             | AMR                | 8             | SIF IN : $f = 4.5MHz$<br>$f_m = 400Hz$ , $\Delta f = \pm 25kHz$<br>AM 30%, $v_{in} = 100dB\mu$            | 40   | 45   | -    | dB            |
| Recovered Output Voltage    |             | $V_{OD}$           | 8             | SIF IN : $f = 4.5MHz$<br>$f_m = 400Hz$ , $\Delta f = \pm 25kHz$<br>$v_{in} = 80dB\mu$ , $R_D = 12k\Omega$ | 0.5  | 0.75 | -    | $V_{rms}$     |
| Total Harmonic Distortion   |             | THD <sub>DET</sub> | 8             | SIF IN : $f = 4.5MHz$<br>$f_m = 400Hz$ , $\Delta f = \pm 25kHz$<br>$v_{in} = 80dB\mu$                     | -    | 1.0  | -    | %             |
| Max. Audio Output Voltage   |             | $v_{OM}$           | 8             | SIF IN : $f = 4.4 \sim 4.6MHz$  | 4.0  | -    | -    | $V_{p-p}$     |
| SIF Input Impedance         |             | $R_{IN(SIF)}$      | 7             | $f = 4.5MHz$  | 10.0 | 20.0 | 30.0 | $k\Omega$     |
|                             |             | $C_{IN(SIF)}$      |               |   | -    | 3.0  | -    | pF            |
| DET Output Impedance        |             | $R_o(DET)$         | 9             | (Note 18)   | 10.0 | 15.0 | 20.0 | $k\Omega$     |
| DC Voltage                  | Terminal 21 | $V_{21}$           | 1             | SW <sub>1</sub> :1 (TA7680AP)   | 3.5  | 4.4  | 5.3  | V             |
|                             | Terminal 23 | $V_{23}$           |               | 2 (TA7681AP)  | 4.8  | 6.0  | 7.2  | V             |
|                             | Terminal 1  | $V_1$              |               | SW <sub>2</sub> :2  | 6.0  | 6.7  | 7.4  | V             |
| Max. Attenuation            |             | ATT MAX            | 10            | (Note 19)   | 60   | -    | -    | dB            |
| DC Volume Gain              |             | $G_{ATT MIN}$      | 10            | $R_A = 0$<br>$G_{ATT MIN} = 20 \log \frac{v_2}{v_{23}}$   | 4    | 6    | 8    | dB            |
| ATT Characteristics         | 1           | $V_1(1)$           | 10            | *   | 3.4  | 3.8  | 4.2  | V             |
|                             | 2           | $V_1(2)$           | 10            | **  | 4.5  | 4.9  | 5.3  | V             |
| Signal Leakage              |             | $v_{PT}$           | 11            | (Note 20)   | -    | 1.0  | 3.0  | $mV_{rms}$    |
| AF Amp. Gain                |             | $G_v AF$           | 13            | (Note 21)   | -    | 20   | -    | dB            |
| AF Amp. Distortion          |             | THD AF             | 12            | $P_{23A} = 1V_{pp}$ , 400Hz<br>SW <sub>3</sub> :ON<br>ATT:-26dB Setting                                   | -    | 1.5  | -    | %             |
| AF Amp. Max. Output Voltage |             | $v_{OAF MAX}$      | 13            | (Note 21) THD <sub>AF</sub> 5%  | 1.5  | 2.0  | -    | $V_{rms}$     |
| AF Output DC Voltage        |             | $V_3$              | 1             | SW <sub>1</sub> :1 (TA7680AP)<br>2 (TA7681AP)<br>SW <sub>2</sub> :2                                       | 6.7  | 7.7  | 8.8  | V             |

\* Read the 400Hz component of  $V_{A1}$  at P<sub>2</sub> with  $R_A = 0$ . Set  $R_A$  so that  $V_{A1}' = \frac{1}{2} V_{A1}$  (-6dB), then read DC voltage of terminal 1 ( $V_1$ ).

\*\* Read the 400Hz component of  $V_{A1}$  at P<sub>2</sub> with  $R_A = 0$ . Set  $R_A$  so that  $V_{A1}' = 3.16 \times 10^{-3} V_{A1}$  (-50dB) then read DC voltage of terminal 1 ( $V_1$ ).

9097247 0019624 641




# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### TEST CIRCUIT

##### 1. DC CHARACTERISTIC

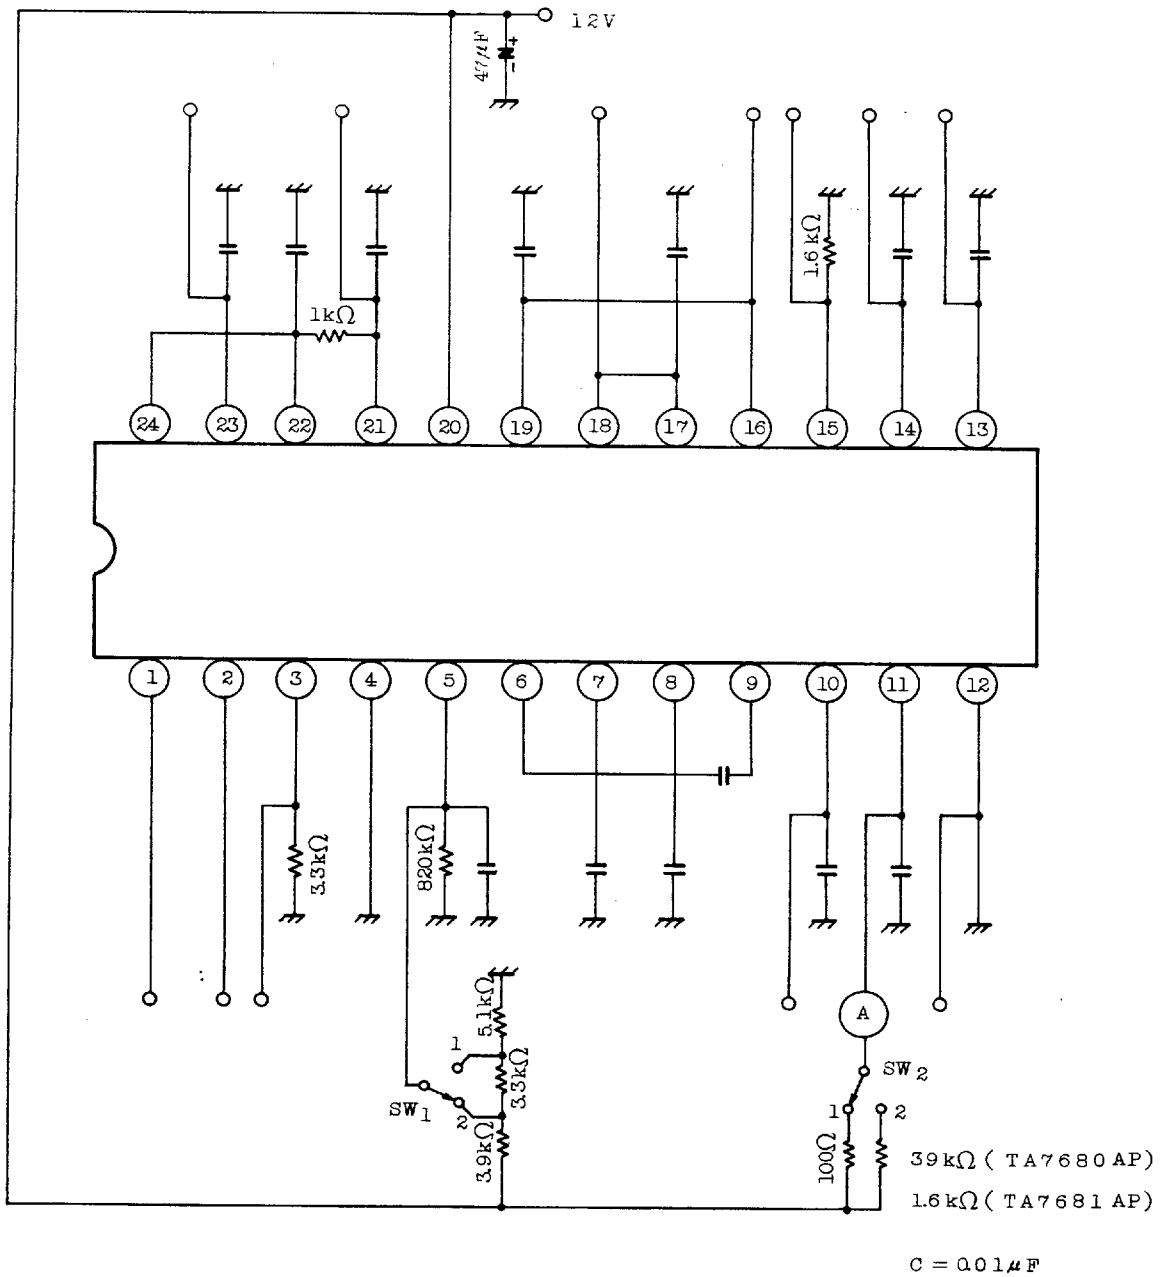

9097247 0019625 588

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-7




# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### 2. AC CHARACTERISTIC

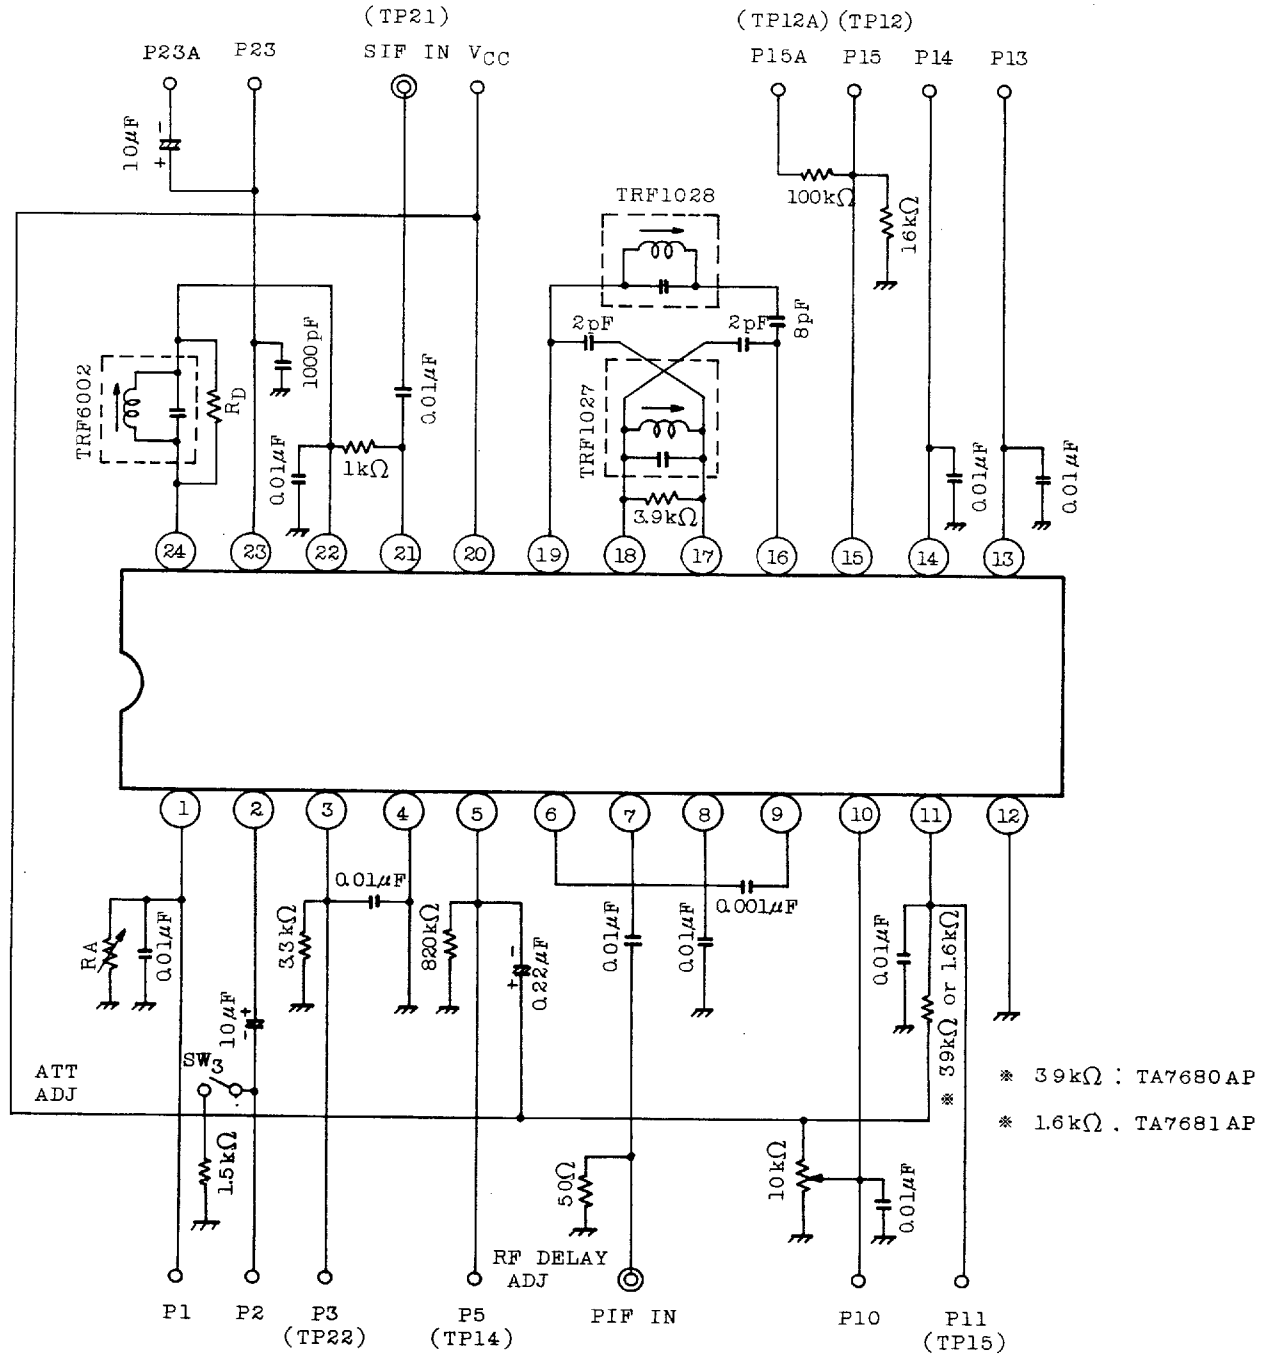

9097247 0019626 414

1983-3-30

TOSHIBA CORPORATION


EJB-TA7680AP-8

GT1A12







#### 3. VIDEO FREQUENCY RESPONSE AND SIF OUTPUT VOLTAGE

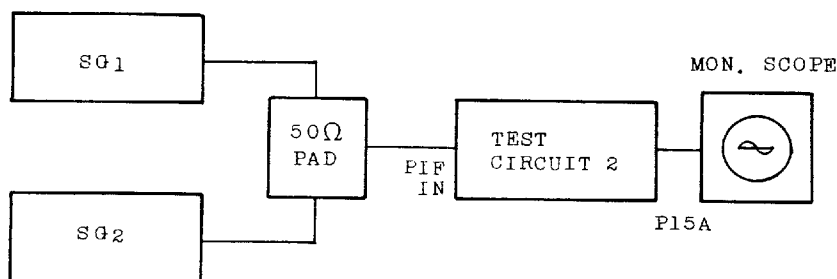

#### 4. INTER MODULATION

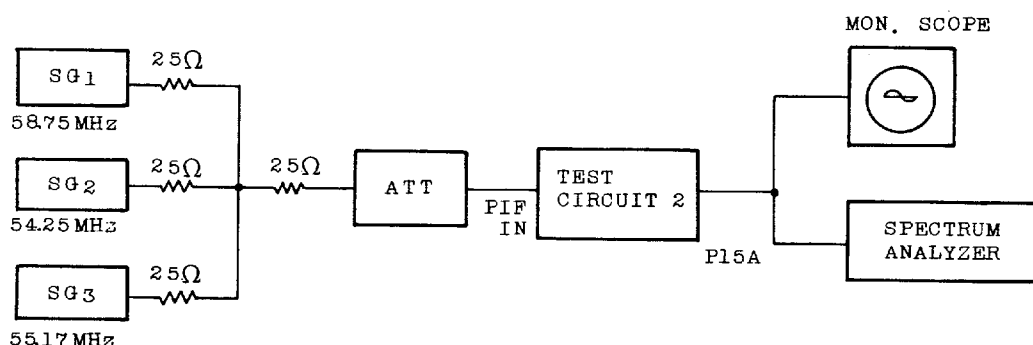

#### 5. DG, DP

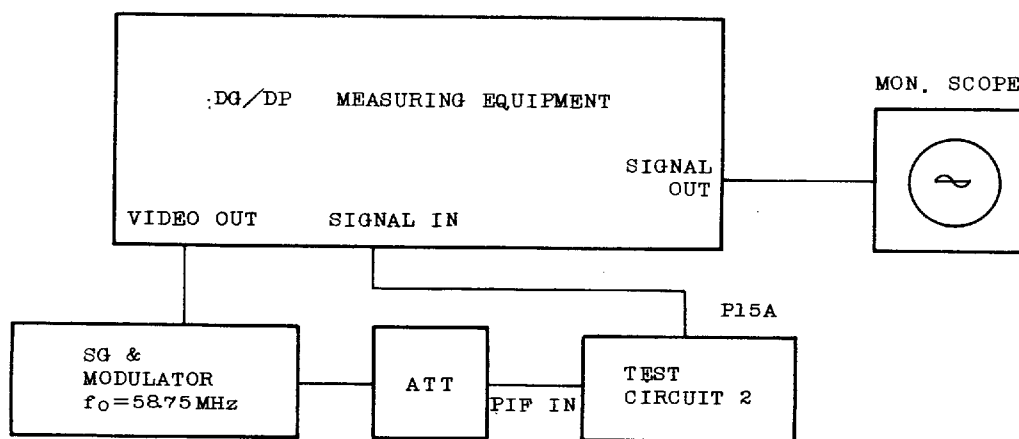

APL=50%

ATT : ADJUST SYNC TIP LEVEL TO DC 2.5V

9097247 0019627 350




# INTEGRATED CIRCUIT


## TECHNICAL DATA

TA7680AP, TA7681AP

### 6. PIF INPUT IMPEDANCE

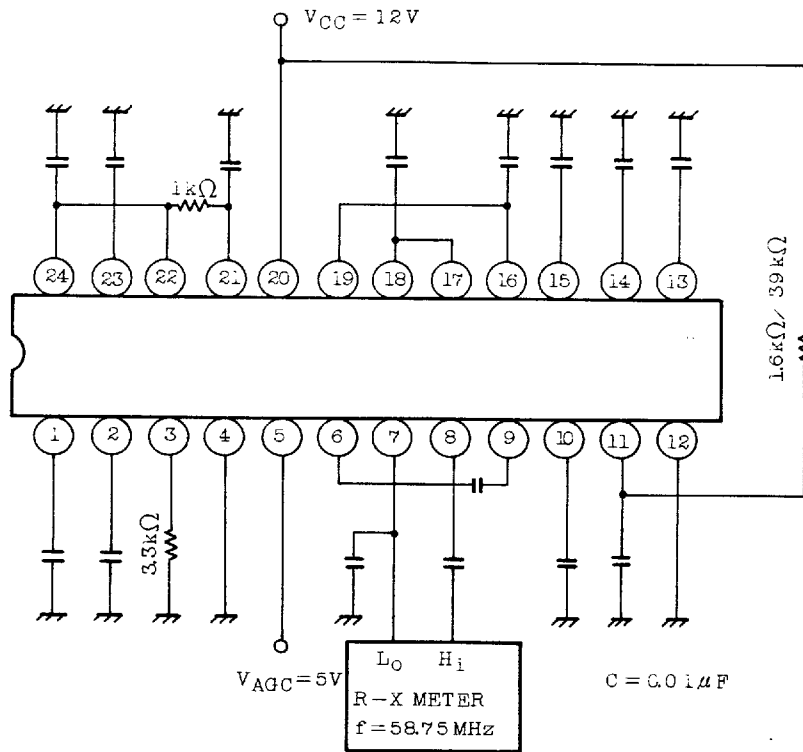

### 7. SIF INPUT IMPEDANCE

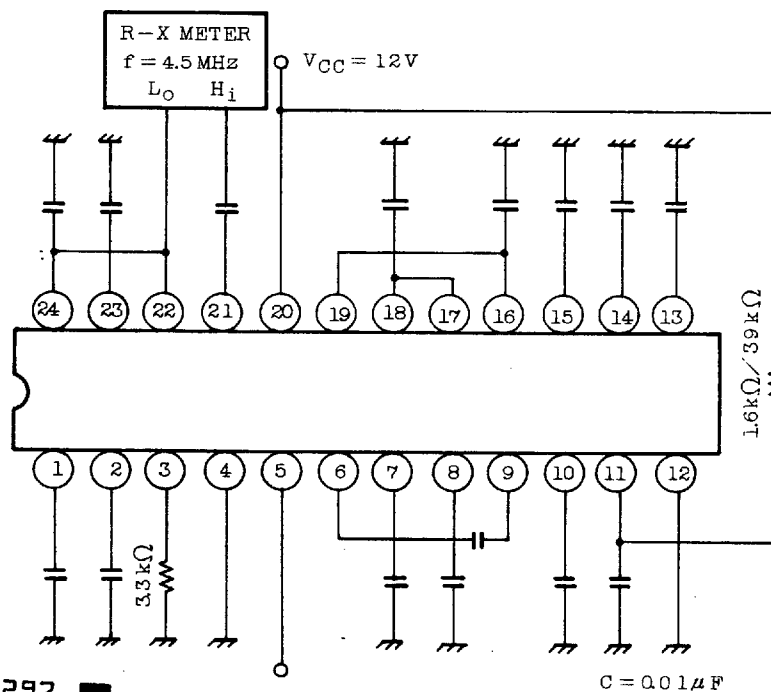

9097247 0019628 297

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-10

GT1A12




# INTEGRATED CIRCUIT


## TECHNICAL DATA

TA7680AP, TA7681AP


8.  $v_{IN(LIM)}$ , AMR,  $V_{OD}$ , THD,  $v_{OM}$

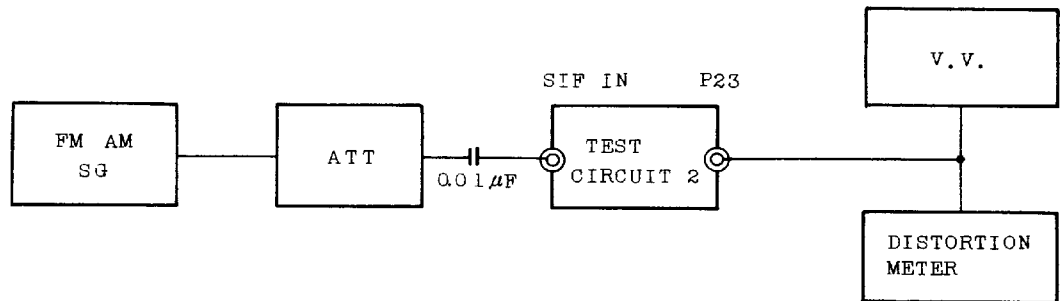

9. AUDIO OUTPUT IMPEDANCE

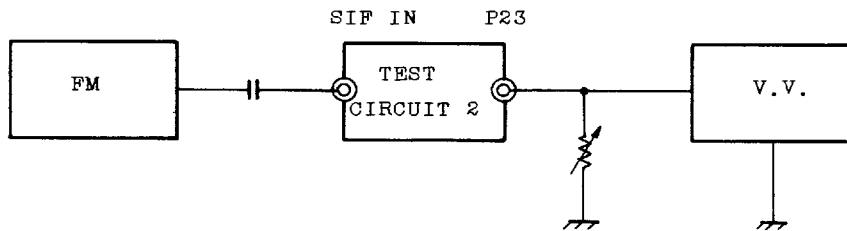

10. ATT MAX.,  $G_{ATT MIN}$ ,  $V_1(1)$ ,  $V_1(2)$

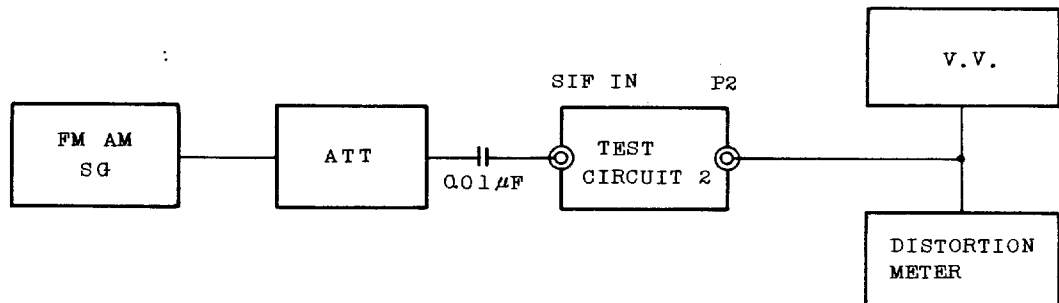

■ 9097247 0019629 123 ■

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-11

GT1A12




# INTEGRATED CIRCUIT


TECHNICAL DATA

TA7680AP, TA7681AP


11.  $v_{PT}$

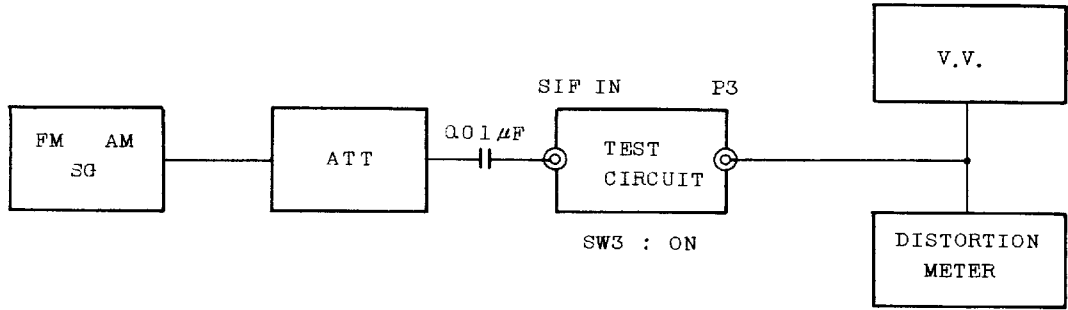

12.  $THD_{AF}$

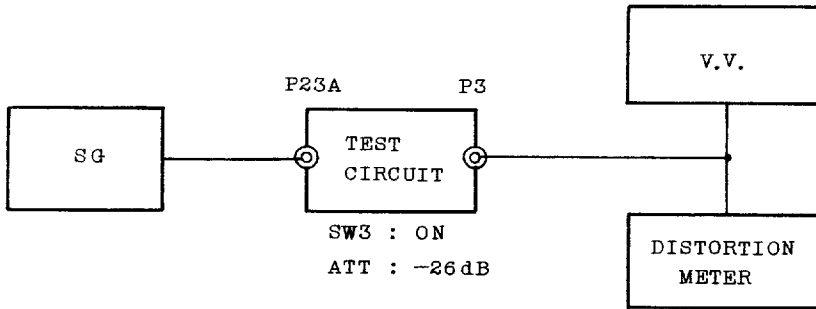

13.  $G_{V AF}$ ,  $v_{OAF MAX}$  :

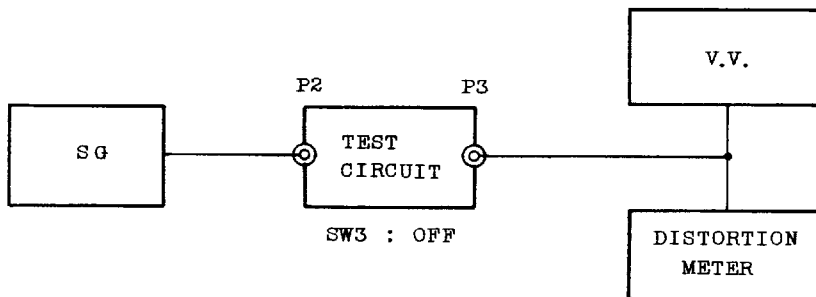

9097247 0019630 945

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-12

GT1A12



## TEST CONDITION

Note 1)  $V_{AGC}$  (P5 EXT. Applying Voltage)=11.5V

PIF IN ;  $f=58.75\text{MHz}$  1kHz 30% AM Modulation.

Adjust PIF Input Level  $v_i$  so that the detected output of P15A with high impedance probe will be  $0.8V_{p-p}$  and measure the Input Level.

Note 2)  $V_{AGC}=4V$

Measure PIF Input Level  $v_i'$  same as NOTE 1

$$\Delta A = 20 \log \frac{v_i'}{v_i} \quad (\text{dB})$$

Note 3) PIF IN ;  $f=58.75\text{MHz}$  CW  $15\text{mV}_{\text{rms}}$

Measure DC level of P15

Note 4) PIF IN ;  $f=58.75\text{MHz}$  APL 100%, 87.5% AM modulation.


P5 : open

(1) Adjust PIF Input Level  $50\text{mV}_{p-p}$  and measure the detected output level  $v_{01p-p}$

(2) Then increase the Input Level so that the detected output level will be  $1.1 \times v_{01p-p}$  and measure the Input Level.

Note 5)  $V_{AGC}=8V$

PIF IN ;  $f=58.75\text{MHz} \pm 10\text{MHz}$  variable or sweep  $15\text{mV}_{\text{rms}}$  measure DC level of P15.

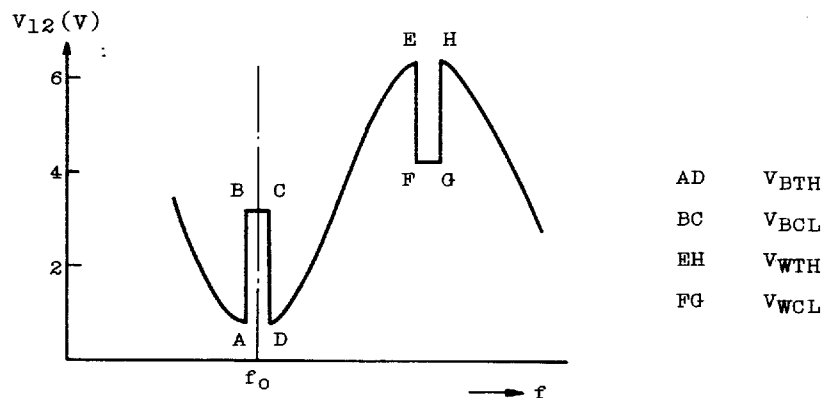



# INTEGRATED CIRCUIT

TA7680AP, TA7681AP

## TECHNICAL DATA

- Note 6)  $V_{AGC}=8V$  ( $GR \approx 30dB$ )  
SG<sub>1</sub> : 58.75MHz CW  
SG<sub>2</sub> : 58.65~40MHz Variable  
(1) Setting output of SG<sub>1</sub> so that DC level of P15 will be 4.0V  
(2) Setting output of SG<sub>2</sub> (58.65MHz) so that AC level of P15 will be 0.5V<sub>p-p</sub>  
(3) Decreasing frequency of SG<sub>2</sub> until AC level of P15 will be 0.35V<sub>p-p</sub> (-3dB of 0.5V<sub>p-p</sub>) then read  $f_{SG2}=F$   
 $f_{BW}=58.75-F$  MHz
- Note 7) SG<sub>1</sub> ; 58.75MHz, 1kHz 80% AM modulation 100mV<sub>rms</sub>  
SG<sub>2</sub>, SG<sub>3</sub> ; OFF  
Setting  $V_{AGC}$  so that output AC level of P15 will be 2.7V<sub>p-p</sub>  
Measure CL of P15 after setting to 0% AM of SG<sub>1</sub>  
$$CL = 20 \log \frac{2.7}{v_{CR}(V_{p-p})} \quad [dB]$$
- Note 8) Measure I<sub>2nd</sub> of P15 same as NOTE 7
- Note 9)  $V_{AGC}=8V$   
SG<sub>1</sub> ; 58.75MHz (P; Picture) 100mV<sub>rms</sub>  
SG<sub>2</sub> ; 54.25MHz (S; Sound) 32mV<sub>rms</sub> (-10dB of SG<sub>1</sub>)  
SG<sub>3</sub> ; 55.17MHz (C; Chroma) 32mV<sub>rms</sub> (-10dB of SG<sub>1</sub>)  
(1) Setting  $V_{AGC}$  so that the output tip level (lower) of P15 will be 3.0V DC  
(2) Measure the level difference (dB) between c-level and 920kHz level
- Note 10)  $V_{AGC}=8V$   
PIF IN ; f=58.75MHz Video Signal (ramp) 87.5% AM 100mV<sub>p-p</sub>  
Setting ATT so that the sync tip level of P15 will be 2.5V DC  
Measure DP and DG.
- Note 11)  $V_{AGC}=5V$  f=58.75MHz  
Measure R<sub>IN</sub>, C<sub>IN</sub>

9097247 0019632 718

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-14

GT1A12



Note 12) AFT Sensitivity  $\Delta F/\Delta(V_{13}-V_{14})$


- (1) INT, AGC (P5 Open)
- (2) PIF Input ; 58.75MHz  $\pm 1.0$ MHz, CW 15mV<sub>rms</sub>
- (3) Read the frequency ( $f_1$ ) of PIF when  $V_{13}-V_{14}=-1$ V
- (4) Read the frequency ( $f_2$ ) of PIF when  $V_{13}-V_{14}=1$ V

Then calculate

$$\Delta F/\Delta(V_{13}-V_{14})=|f_1-f_2|$$

Note 13)  $\Delta F_W$ ,  $V_{13U}$ ,  $V_{14U}$ ,  $V_{13L}$ ,  $V_{14L}$

- (1) INT AGC (P5 Open)
- (2) PIF IN ; 58.75MHz  $\pm 10$ MHz CW 15mV<sub>rms</sub>
- (3) 8pF at Pin 16 should be shorted
- (4) Read the frequency ( $f_1$  or  $f_2$ ) when the  $V_5$  or  $V_6$  reduced to 90% level of A or B with varying the frequency. Then band width is the difference from center frequency ( $f_0$ ).

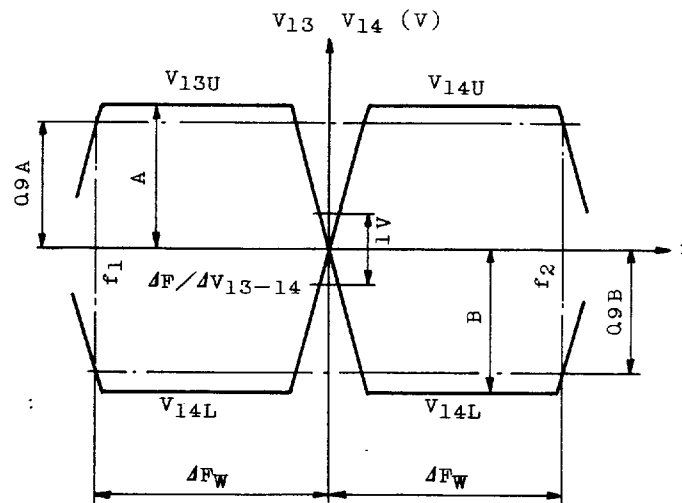

Note 14) P5 : Open

PIF IN ; 58.75MHz CW 20mV<sub>rms</sub>

- (1) Adjust the voltage of terminal 3 so that the voltage of terminal 4 will be 6.0V DC
- (2) Measure the terminal voltage 3



- Note 15) P5 : Open  
PIF IN ; 58.75MHz 100% APL 87.5% AM modulation signal amplitude 50mV<sub>p-p</sub>  
Measure detected output voltage (White peak to sync Tip)
- Note 16) P5 : Open  
SG<sub>1</sub> ; 58.75MHz CW 100mV<sub>rms</sub>  
SG<sub>2</sub> ; 54.25MHz CW 25mV<sub>rms</sub>  
Measure SIF (4.5MHz) output voltage at P15
- Note 17) SIF IN ; f=4.5MHz FM f<sub>MOD</sub>=400Hz  $\Delta f = \pm 25\text{kHz}$   
(1) Adjust SIF Input Level 100mV<sub>p-p</sub> and measure the detected output level  $v_{OS}$   
(2) Then decrease the Input Level so that the detected output level will be 3dB down of  $v_{OS}$  and measure the Input Level
- Note 18) Output Impedance  
(1) SIF IN ; f=4.5MHz, f<sub>MOD</sub>=400Hz,  $\Delta f = \pm 25\text{kHz}$ , 80dB $\mu$   
(2) AT P23 read the V<sub>O1</sub> at R<sub>X</sub>= $\infty$ , then read the R<sub>X</sub> when recovered output become V<sub>O1</sub>/2 with varying the R<sub>X</sub>.  
The R<sub>X</sub> is the output impedance.
- Note 19) ATT MAX.  
(1) SIF IN ; f=4.5MHz, f<sub>MOD</sub>=400Hz,  $\Delta f = \pm 25\text{kHz}$ , 80dB $\mu$   
(2) Read the 400Hz component of V<sub>A1</sub> at P2 with R<sub>A</sub>=0, then read V<sub>A1</sub>' with R<sub>A</sub>= $\infty$ .  
$$\text{ATT MAX} = 20 \log \frac{V_{A1}}{V_{A1}'}$$
- Note 20)  $v_{PT}$  :  
(1) SIF IN ; f=4.5MHz, f<sub>MOD</sub>=400Hz,  $\Delta f = \pm 25\text{kHz}$ , 80dB $\mu$   
(2) Read the 400Hz component at P3
- Note 21) G<sub>V</sub> AF  
(1) Apply 400Hz 0.1V<sub>rms</sub> signal to P2  
(2) Read the output voltage at P3






# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

### APPLICATION CIRCUIT

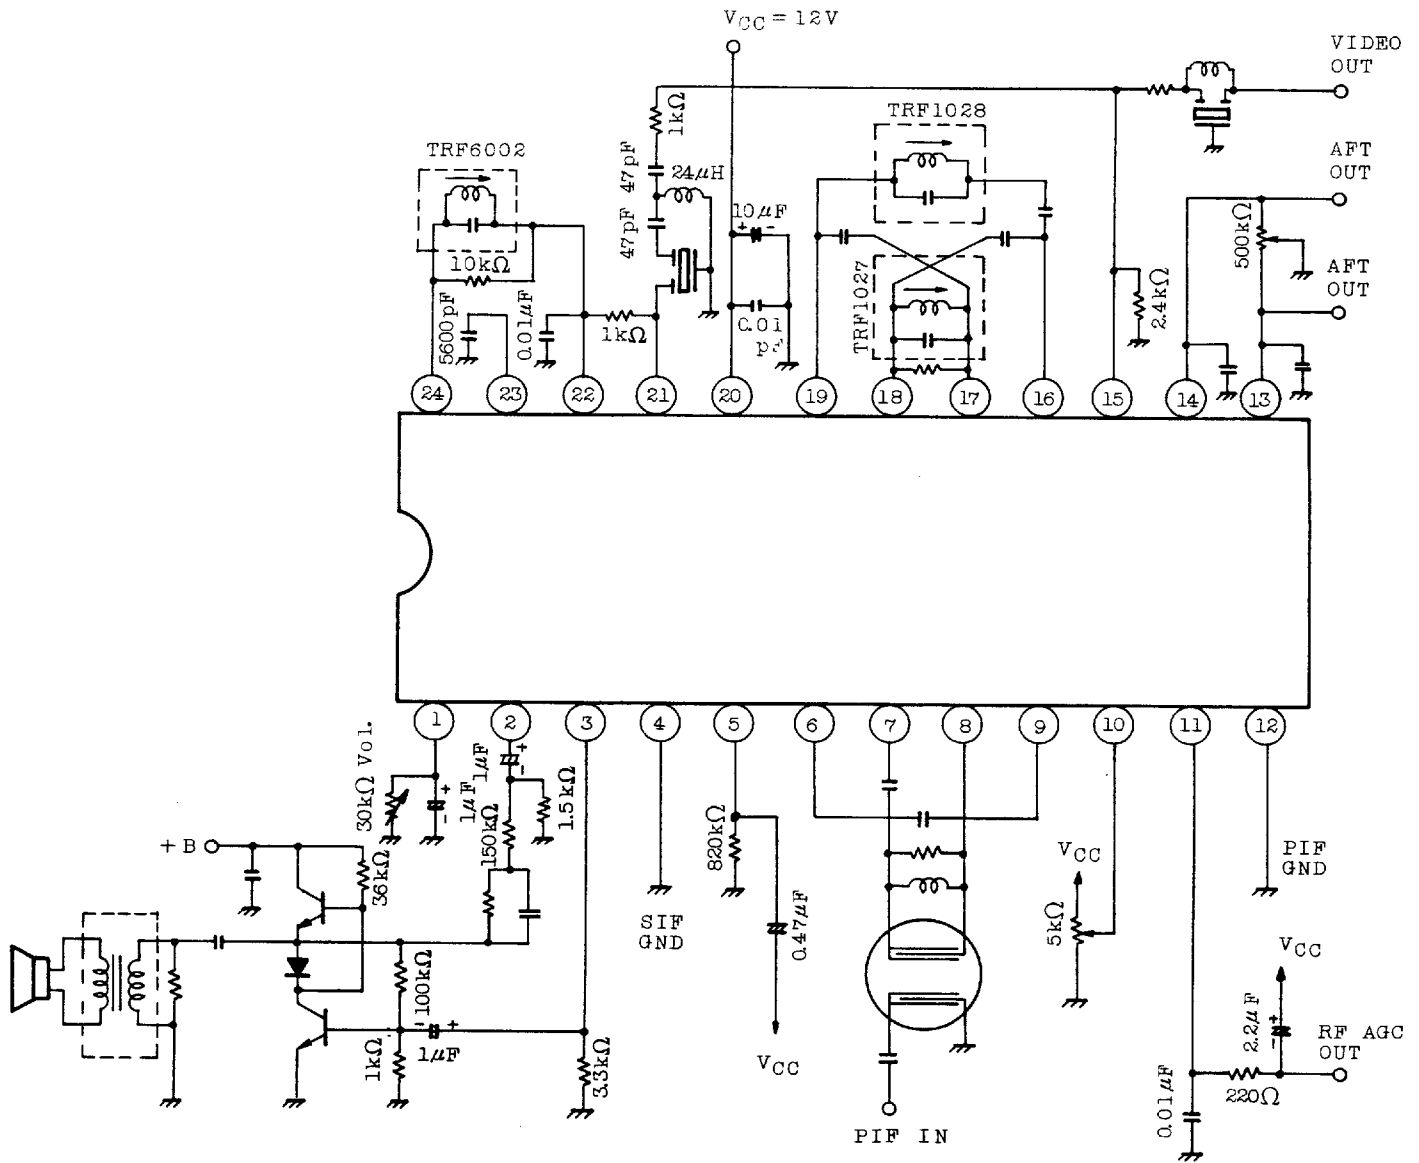

1983-3-30

GT1A12

TOSHIBA CORPORATION

9097247 0019635 427

EJB-TA7680AP-17