


VOLTAGE COMPARATORS

- MAXIMUM INPUT CURRENT : 150nA
- MAXIMUM OFFSET CURRENT : 20nA
- DIFFERENTIAL INPUT VOLTAGE RANGE : $\pm 30V$
- POWER CONSUMPTION : 135mW AT $\pm 15V$
- SUPPLY VOLTAGE : +5V TO $\pm 15V$
- OUTPUT CURRENT : 50mA

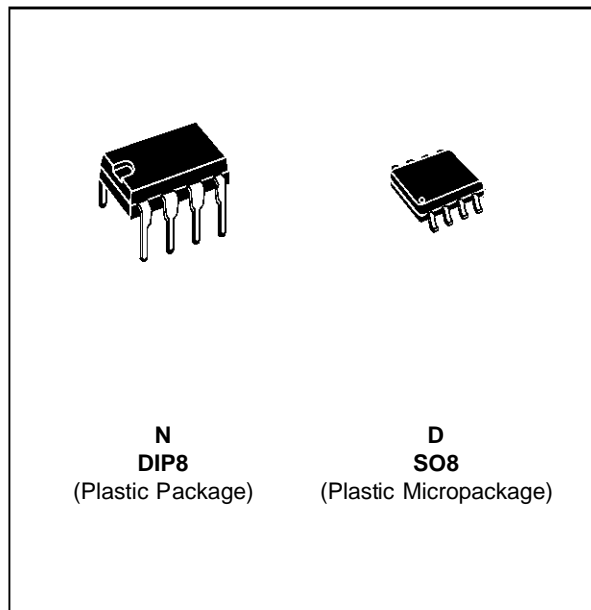

DESCRIPTION

The LM111, LM211 and LM311 are voltage comparators that have low input currents.

They are also designed to operate over a wide range of supply voltages : from standard $\pm 15V$ operational amplifier supplies down to the single +5V supply used for IC logic.


Their output is compatible with RTL-DTL and TTL as well as MOS circuits and can switch voltages up to +50V at output currents as high as 50mA.

ORDER CODES


| Part Number | Temperature Range | Package | |
|-------------|-------------------|---------|---|
| | | N | D |
| LM111 | -55, 125°C | • | • |
| LM211 | -40, 105°C | • | • |
| LM311 | 0, 70°C | • | • |

Example : LM311D

PIN CONNECTIONS (top view)

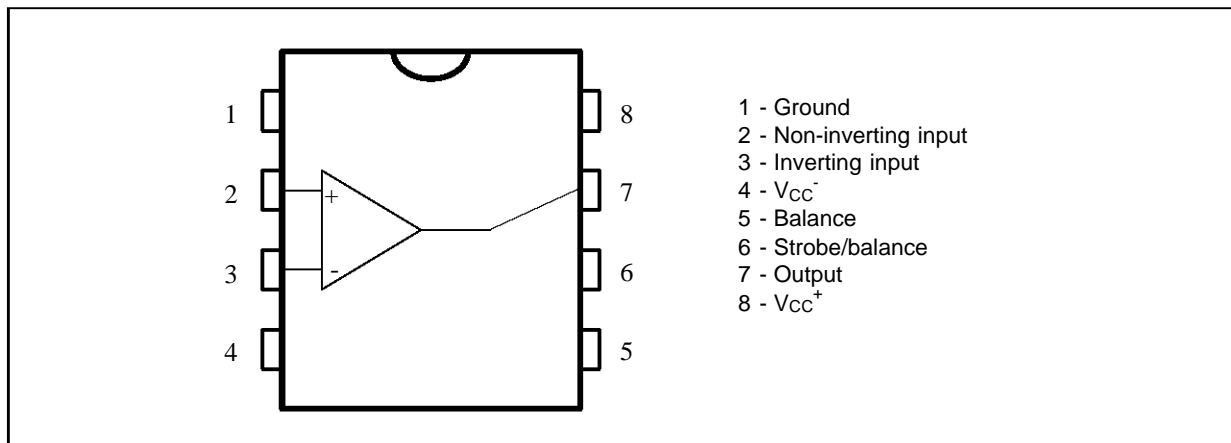

SCHEMATIC DIAGRAM

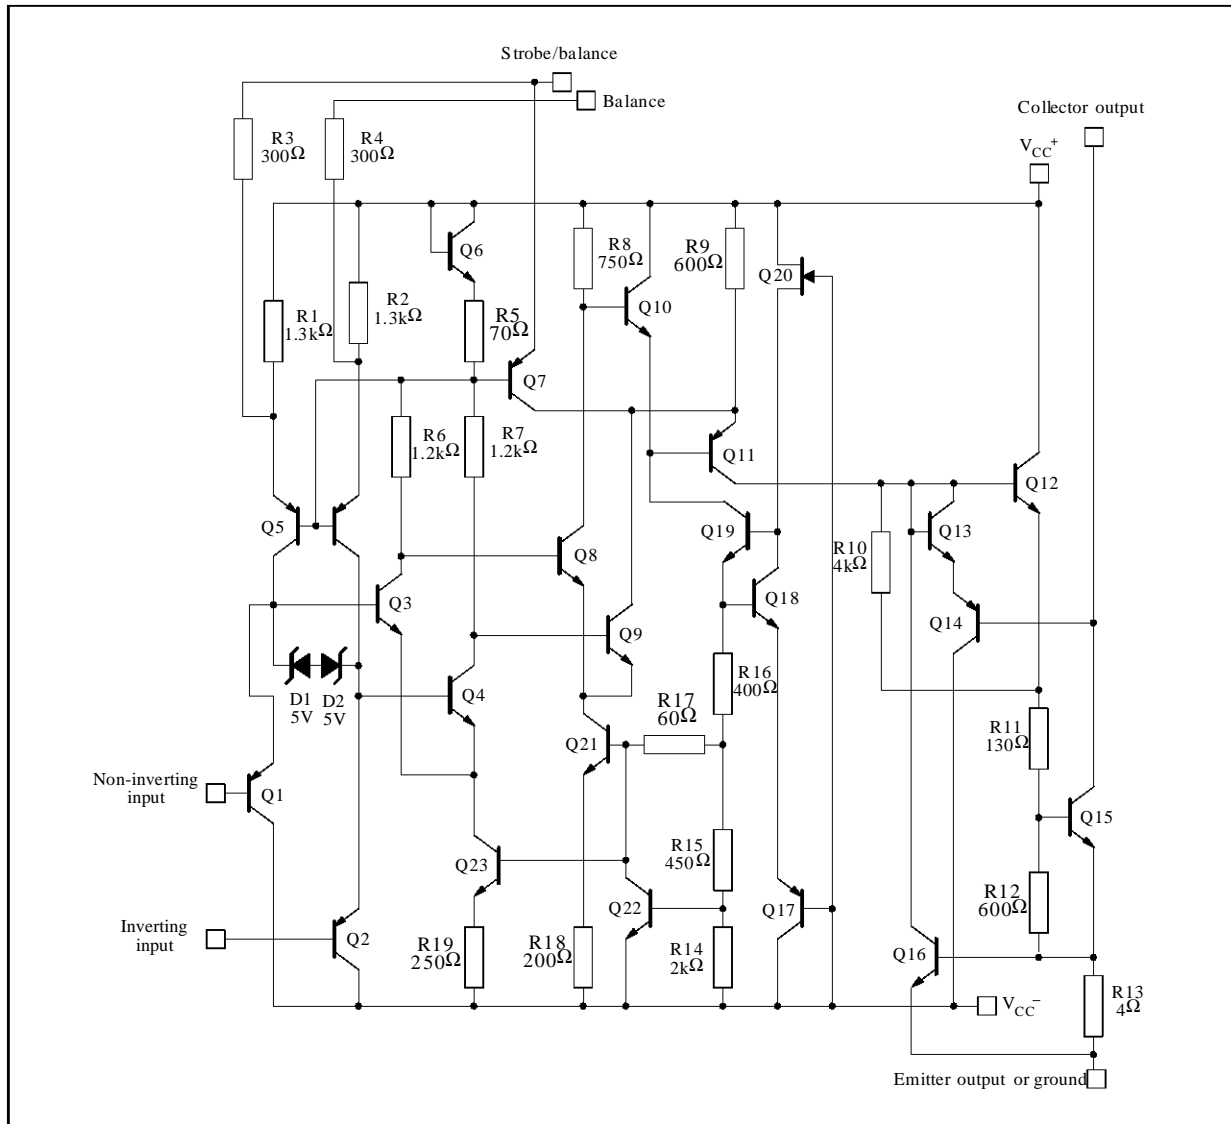

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | LM111 | LM211 | LM311 | Unit |
|-------------|--------------------------------------|-------------|-------------|-------------|-------------|
| V_{CC} | Supply Voltage | 36 | 36 | 36 | V |
| V_{id} | Differential Input Voltage | ± 30 | ± 30 | ± 30 | V |
| V_i | Input Voltage – (note 1) | ± 15 | ± 15 | ± 15 | V |
| P_{tot} | Power Dissipation | 500 | | | mW |
| T_{oper} | Operating Free-air Temperature Range | -55 to +125 | -40 to +105 | 0 to +70 | $^{\circ}C$ |
| T_{stg} | Storage Temperature Range | -65 to +150 | -65 to +150 | -65 to +150 | $^{\circ}C$ |
| $V_{(1-4)}$ | Ground to Negative Supply Voltage | 30 | 30 | 30 | V |
| $V_{(7-4)}$ | Output to Negative Supply Voltage | 50 | 50 | 40 | V |

Output short-circuit duration : 10s
 Voltage at strobe pin : $V_{CC}^+ - 5V$

Maximum junction temperature

LM111 : +150 $^{\circ}C$
 LM211 : +150 $^{\circ}C$
 LM311 : +150 $^{\circ}C$






Note : 1. This rating applies for $\pm 15V$ supplies. The positive input voltage limit is 30V above the negative. The negative input voltage limit is equal to the negative supply voltage or 30V below the positive supply, whichever is less.

ELECTRICAL CHARACTERISTICS


V_{CC} = ±15V, T_{amb} = 25°C (unless otherwise specified)

| Symbol | Parameter | LM111 - LM211 | | | LM311 | | | Unit |
|--|--|---------------|----------------|------------|-------|----------------|------------|----------------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| V _{io} | Input Offset Voltage (R _S ≤ 50kΩ) – (note 1) T _{amb} = +25°C T _{min.} ≤ T _{amb} ≤ T _{max.} | | 0.7 | 3 4 | | 2 | 7.5 10 | mV |
| I _{io} | Input Offset Current – (note 1) T _{amb} = +25°C T _{min.} ≤ T _{amb} ≤ T _{max.} | | 4 | 10 20 | | 6 | 50 70 | nA |
| I _{ib} | Input Bias Current – (note 1) T _{amb} = +25°C T _{min.} ≤ T _{amb} ≤ T _{max.} | | 60 | 100 150 | | 100 | 250 300 | nA |
| A _{vd} | Large Signal Voltage Gain | 40 | 200 | | 40 | 200 | | V/mV |
| I _{CC} ⁺ I _{CC} ⁻ | Supply Currents Positive Negative | | 5.1 4.1 | 6 5 | | 5.1 4.1 | 7.5 5 | mA |
| V _{icm} | Input Common Mode Voltage Range T _{min.} ≤ T _{amb} ≤ T _{max.} | -14.5 | +13.8 -14.7 | +13 | -14.5 | +13.8 -14.7 | +13 | V |
| V _{OL} | Low Level Output Voltage T _{amb} = +25°C, I _o = 50mA V _i ≤ -5mV V _i ≤ -10mV T _{min.} ≤ T _{amb} ≤ T _{max.} V _{CC} ⁺ ≥ +4.5 V, V _{CC} ⁻ = 0 I _o = 8mA V _i ≤ -6mV V _i ≤ -10mV | | 0.75 0.23 | 1.5 0.4 | | 0.75 0.23 | 1.5 0.4 | V |
| I _{OH} | High Level Output Current T _{amb} = +25°C T _{min.} ≤ T _{amb} ≤ T _{max.} | | 0.2 0.1 | 10 0.5 | | 0.2 | 50 | nA nA μA |
| I _{strobe} | Strobe Current | | 3 | | | 3 | | mA |
| t _{re} | Response Time – (note 2) | | 200 | | | 200 | | ns |


- Notes :**
- The offset voltage, offset current and bias current specifications apply for any supply voltage from a single +5V supply up to ±15V supplies.
The offset voltages and offset currents given are the maximum values required to drive the output down to +1V or up to +14V with a 1mA load current. Thus, these parameters define an error band and take into account the worst-case of voltage gain and input impedance.
 - The response time specified (see definitions) is for a 100mV input step with 5mV overdrive.

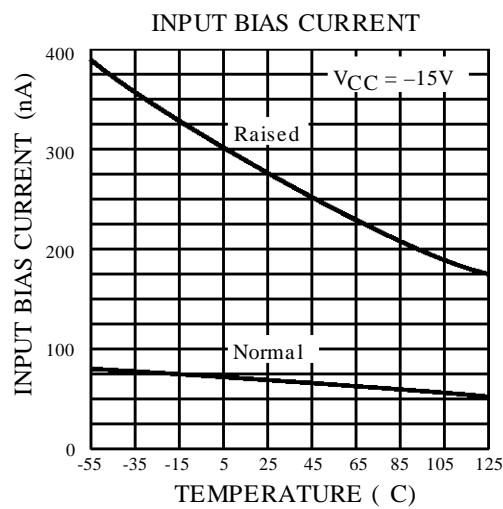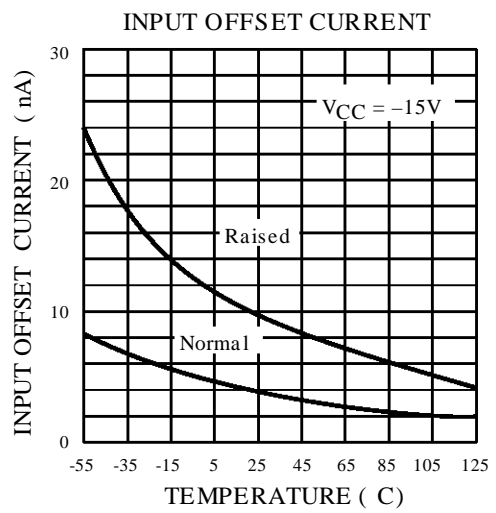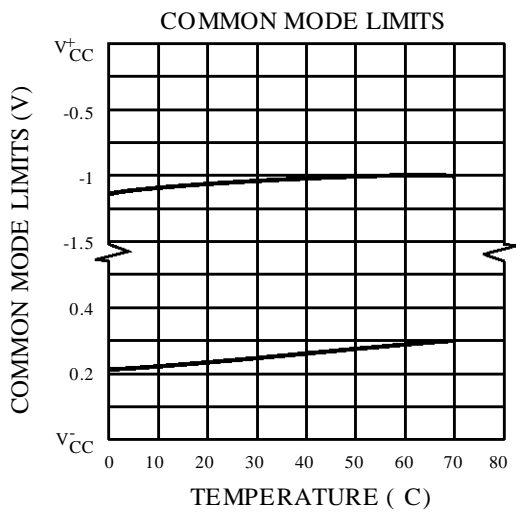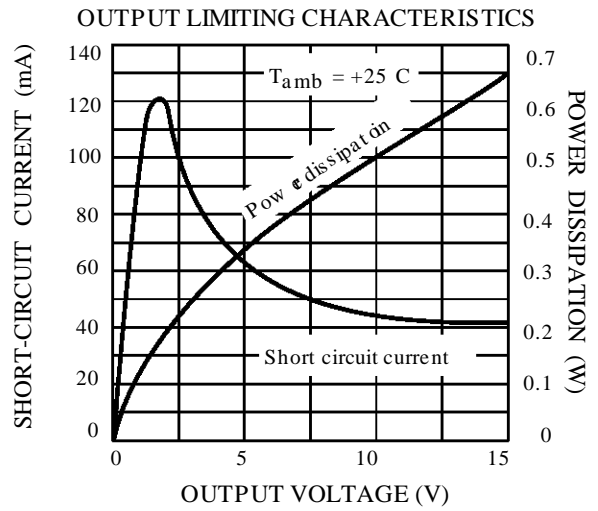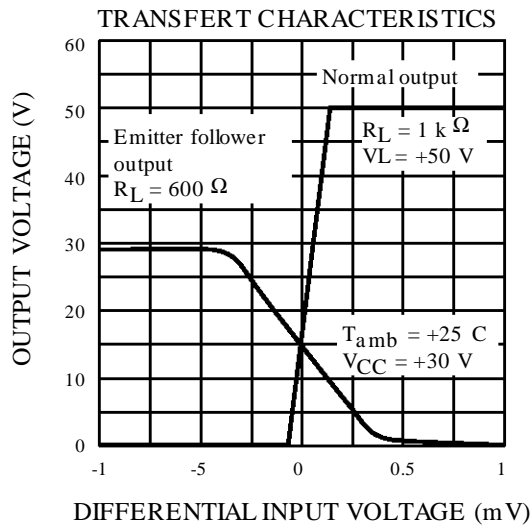


EQUIVALENT INPUT OFFSET ERROR

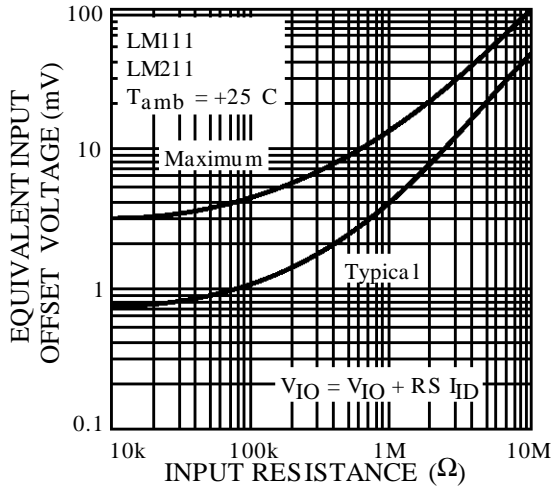


EQUIVALENT INPUT OFFSET ERROR

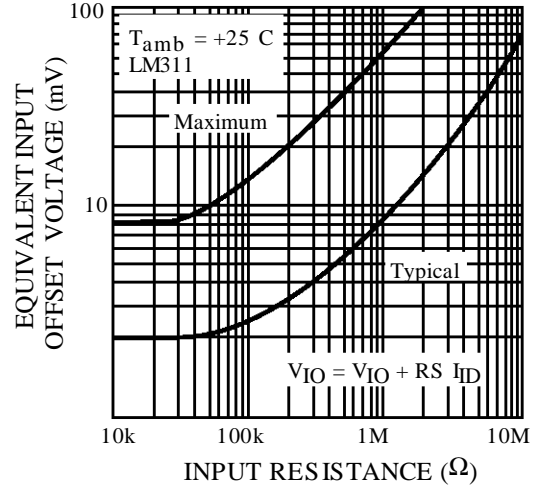


LOW LEVEL OUTPUT SATURATION VOLTAGE

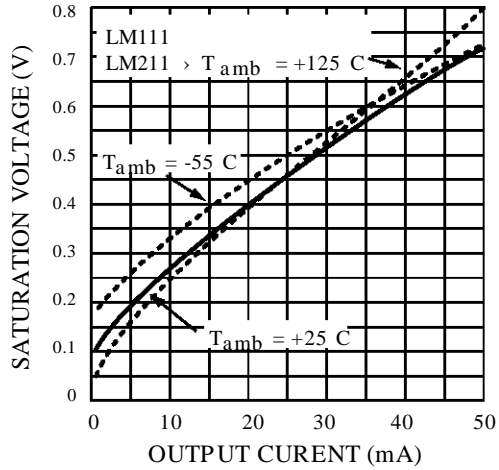


LOW LEVEL OUTPUT SATURATION VOLTAGE

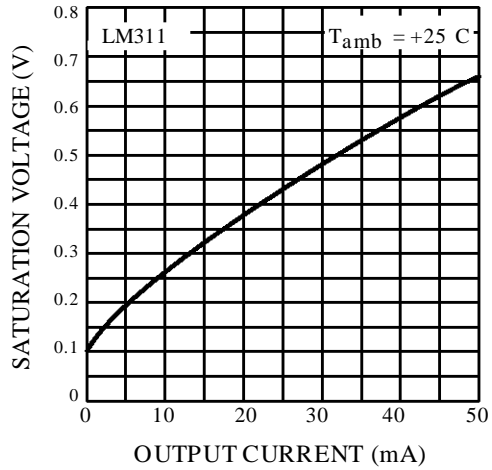


INPUT CHARACTERISTICS

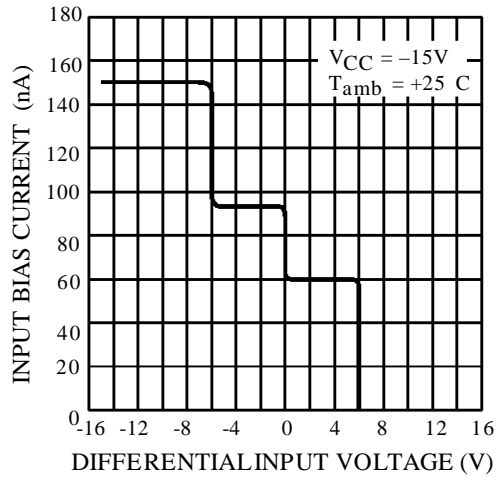


RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

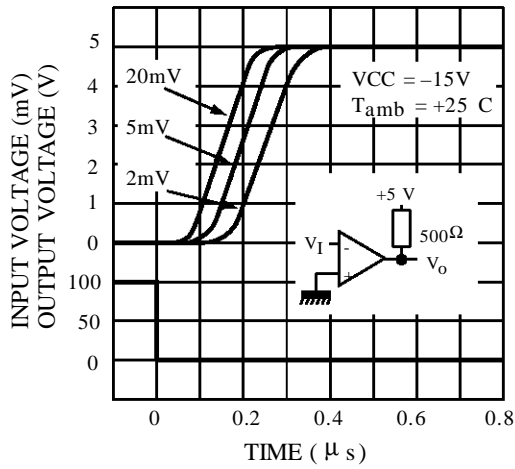


RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

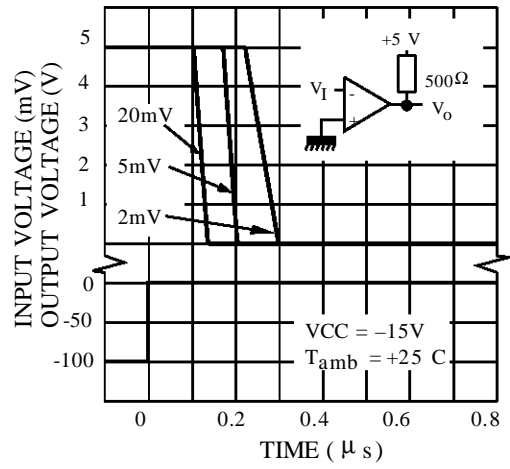

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

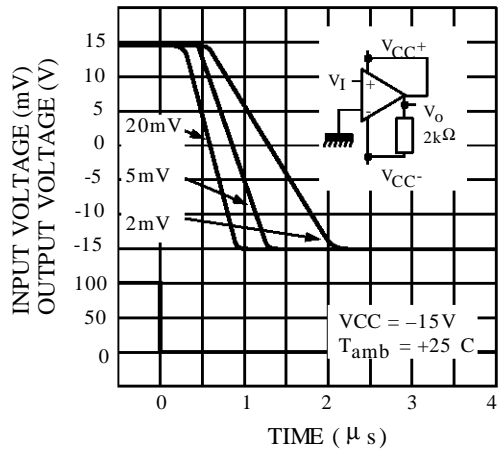


RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

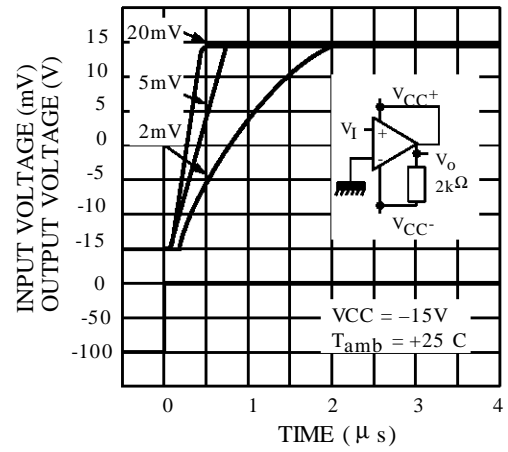


TYPICAL APPLICATIONS

CRYSTAL OSCILLATOR


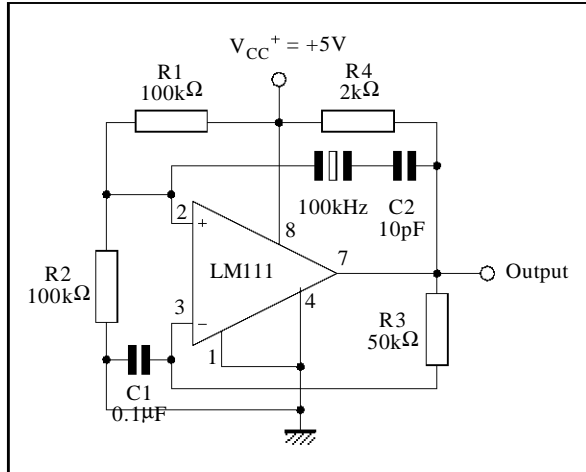


100KHz FREE RUNNING MULTIVIBRATOR


LOW VOLTAGE ADJUSTABLE REFERENCE SUPPLY

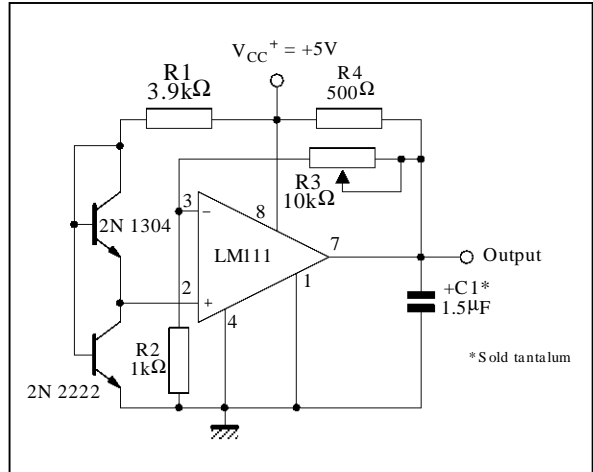

TTL INTERFACE WITH HIGH LEVEL LOGIC

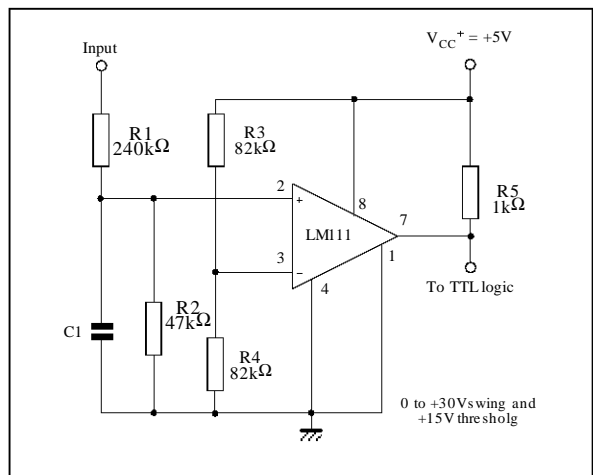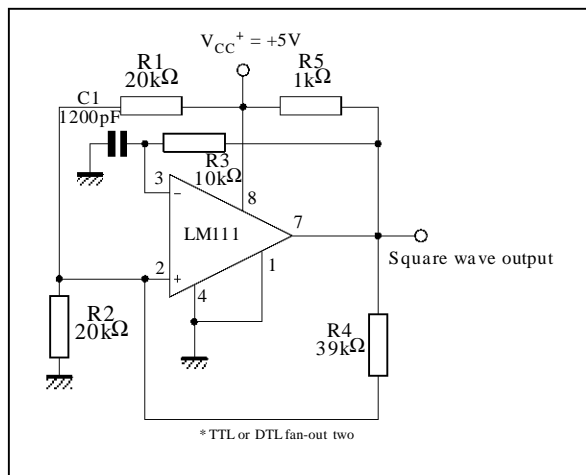


AUXILIARY CIRCUITS

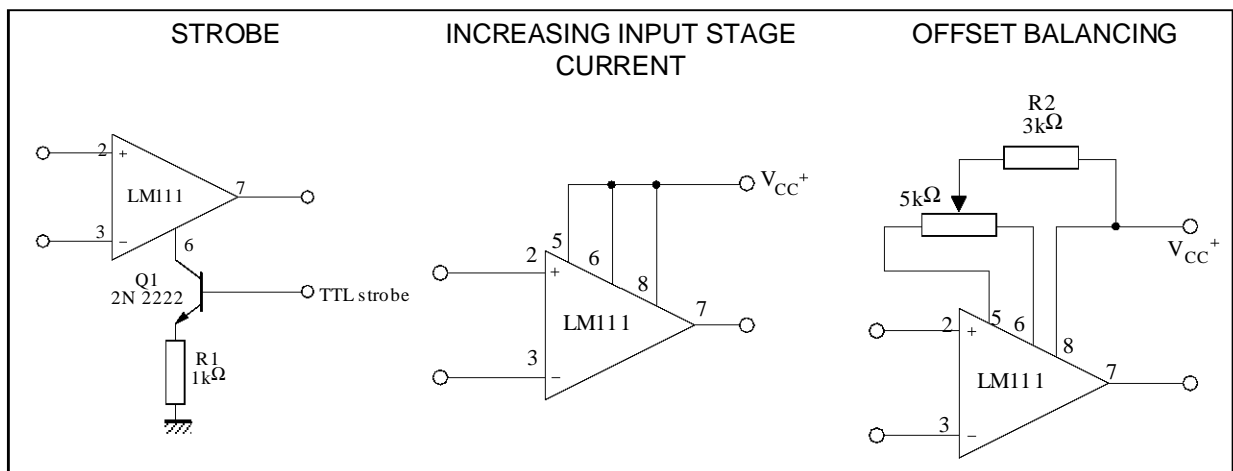

LM111 - LM211 - LM311

PACKAGE MECHANICAL DATA
8 PINS - PLASTIC DIP

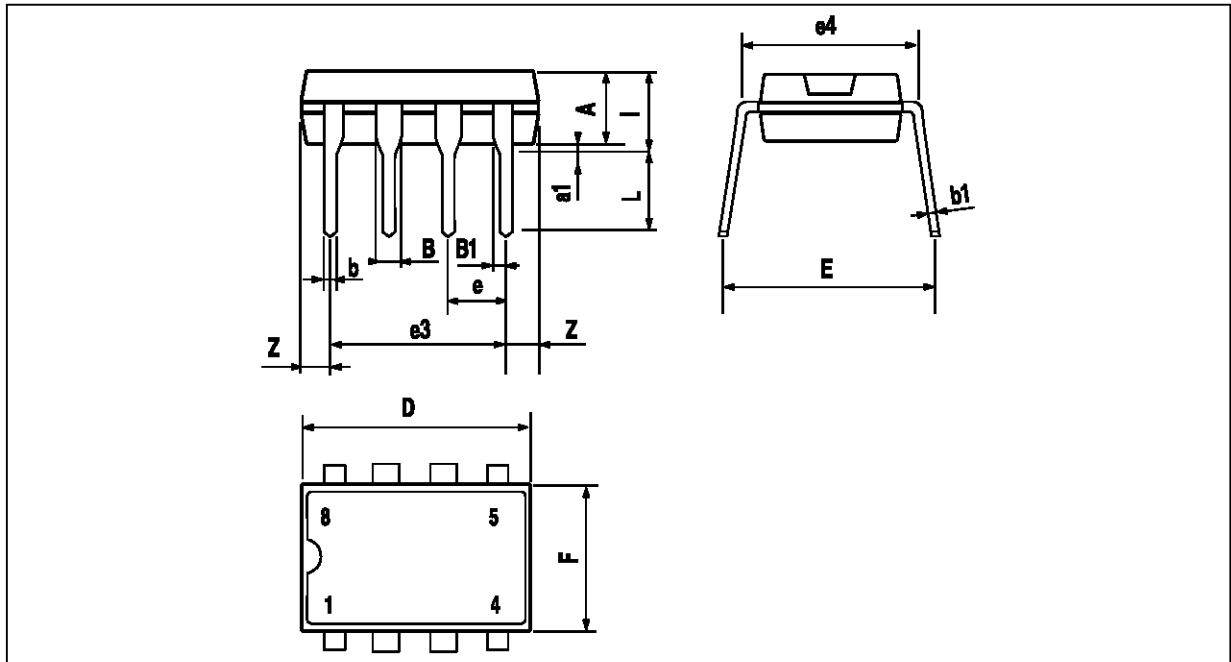


PM-DIP8.EPS

| Dim. | Millimeters | | | Inches | | |
|------|-------------|------|-------|--------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | 3.32 | | | 0.131 | |
| a1 | 0.51 | | | 0.020 | | |
| B | 1.15 | | 1.65 | 0.045 | | 0.065 |
| b | 0.356 | | 0.55 | 0.014 | | 0.022 |
| b1 | 0.204 | | 0.304 | 0.008 | | 0.012 |
| D | | | 10.92 | | | 0.430 |
| E | 7.95 | | 9.75 | 0.313 | | 0.384 |
| e | | 2.54 | | | 0.100 | |
| e3 | | 7.62 | | | 0.300 | |
| e4 | | 7.62 | | | 0.300 | |
| F | | | 6.6 | | | 0.260 |
| i | | | 5.08 | | | 0.200 |
| L | 3.18 | | 3.81 | 0.125 | | 0.150 |
| Z | | | 1.52 | | | 0.060 |

DIP8.TBL

PACKAGE MECHANICAL DATA
8 PINS - PLASTIC MICROPACKAGE (SO)

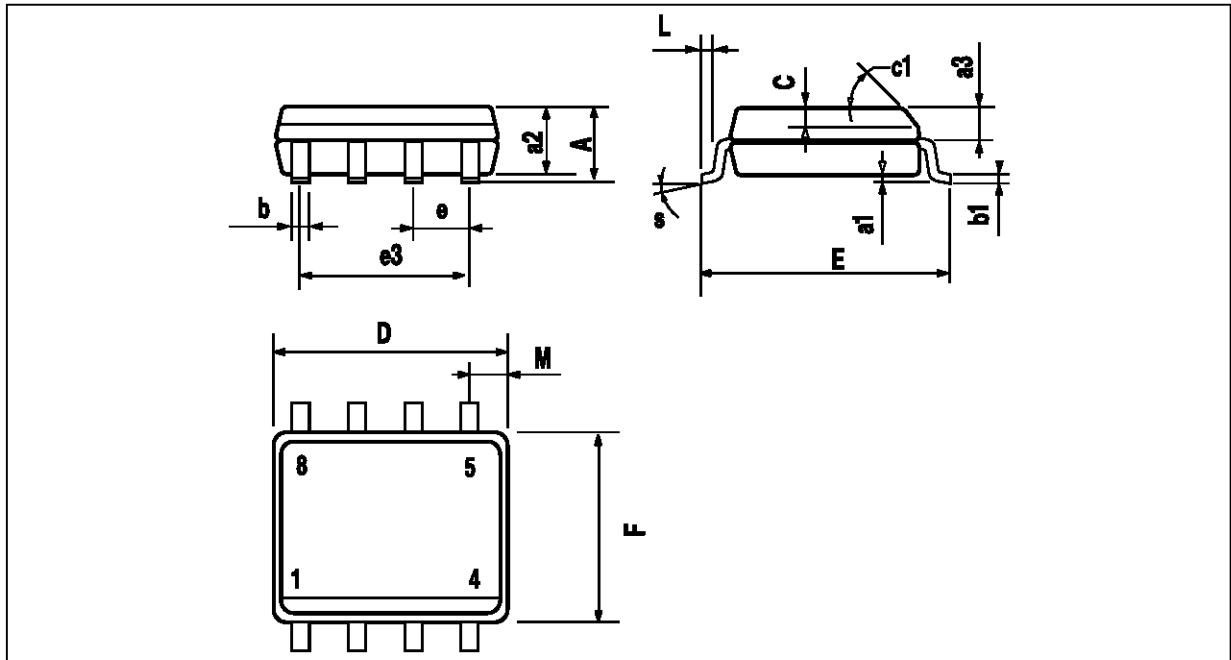

PM-SO8.EPS

| Dim. | Millimeters | | | Inches | | |
|------|-------------|------|------|--------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | | 1.75 | | | 0.069 |
| a1 | 0.1 | | 0.25 | 0.004 | | 0.010 |
| a2 | | | 1.65 | | | 0.065 |
| a3 | 0.65 | | 0.85 | 0.026 | | 0.033 |
| b | 0.35 | | 0.48 | 0.014 | | 0.019 |
| b1 | 0.19 | | 0.25 | 0.007 | | 0.010 |
| C | 0.25 | | 0.5 | 0.010 | | 0.020 |
| c1 | 45° (typ.) | | | | | |
| D | 4.8 | | 5.0 | 0.189 | | 0.197 |
| E | 5.8 | | 6.2 | 0.228 | | 0.244 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 3.81 | | | 0.150 | |
| F | 3.8 | | 4.0 | 0.150 | | 0.157 |
| L | 0.4 | | 1.27 | 0.016 | | 0.050 |
| M | | | 0.6 | | | 0.024 |
| S | 8° (max.) | | | | | |

SO8.TBL

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1996 SGS-THOMSON Microelectronics – Printed in Italy – All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

ORDER CODE :