

Phase-out/Discontinued

DESCRIPTION The 2SK49 is designed for use in FM tuner of a portable RADIO RECIVER.

- FEATURES**
- High Forward Transfer Admittance. $|Y_{fs}|_2$ ($V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$) : 5.5 mS TYP.
 - Low Feedback Capacitance. C_{rss} ($V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$) : 0.07 pF TYP.

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures

Storage Temperature -55 to +125 °C

Junction Temperature +80 °C Maximum

Maximum Power Dissipation ($T_a = 25\text{ °C}$)

Total Power Dissipation 72 mW

Maximum Voltages and Currents ($T_a = 25\text{ °C}$)


V_{GDO} Gate to Drain Voltage -20 V

V_{GSO} Gate to Source Voltage -1.0 V

V_{DSX} Drain to Source Voltage 20 V

I_D Drain Current 10 mA

I_G Gate Current 10 mA

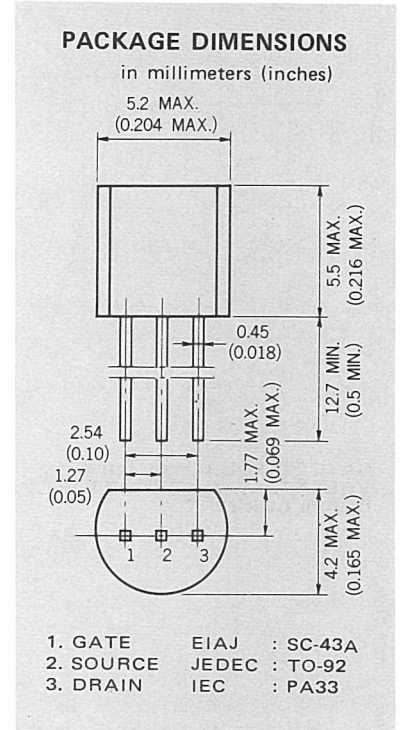

ELECTRICAL CHARACTERISTICS ($T_a = 25\text{ °C}$)

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
I_{DSS}	Zero-Gate Voltage Drain Current	0.5	2.0	6.0	mA	$V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$
$ Y_{fs} _1$	Forward Transfer Admittance	1.9	2.8		mS	$V_{DS} = 5.0\text{ V}$, $I_D = 0.5\text{ mA}$, $f = 1.0\text{ kHz}$
$ Y_{fs} _2$	Forward Transfer Admittance	1.9	5.5		mS	$V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$, $f = 1.0\text{ kHz}$
C_{iss}	Input Capacitance		5.0	6.5	pF	$V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$, $f = 1.0\text{ MHz}$
C_{rss}	Feedback Capacitance		0.07	0.25	pF	$V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$, $f = 1.0\text{ MHz}$
C_{oss}	Output Capacitance		3.8	4.5	pF	$V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$, $f = 1.0\text{ MHz}$
G_{ps}	Power Gain	9.0	18		dB	$V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$, Z_{in} , $Z_{out} = 50\ \Omega$, $f = 100\text{ MHz}$, See test circuit
NF	Noise Figure		3.5	6.0	dB	$V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$, Z_{in} , $Z_{out} = 50\ \Omega$, $f = 100\text{ MHz}$, See test circuit
I_{GSS}	Gate Cutoff Current			-50	nA	$V_{GS} = -0.5\text{ V}$, $V_{DS} = 0$
$V_{GS(off)}$	Gate to Source Cutoff Voltage		-0.8	-2.5	V	$V_{DS} = 5.0\text{ V}$, $I_D = 10\ \mu\text{A}$

Classification of I_{DSS}


Rank	E	F	H
$I_{DSS}(\text{mA})$	0.5 - 1.5	1.0 - 3.0	2.0 - 6.0

I_{DSS} Test Conditions : $V_{DS} = 5.0\text{ V}$, $V_{GS} = 0$


Phase-out/Discontinued

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$ unless otherwise noted)


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

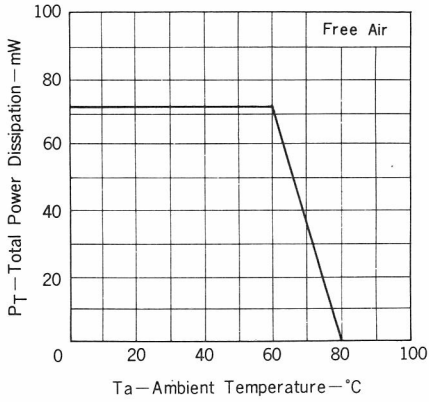


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

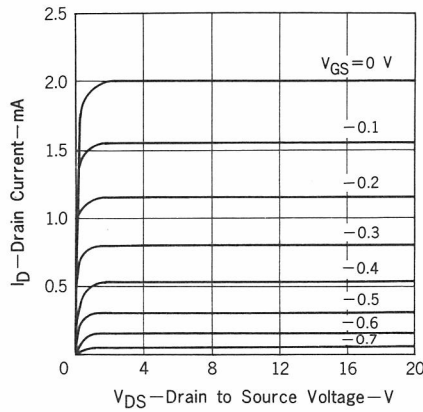


DRAIN CURRENT vs. GATE TO SOURCE VOLTAGE

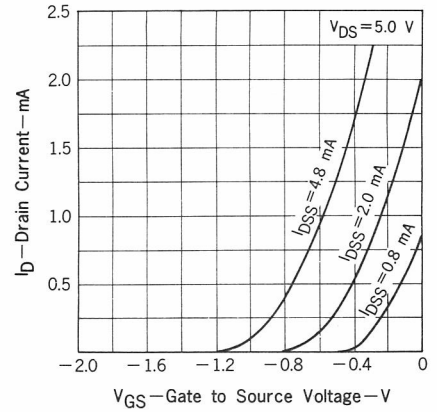


GATE TO SOURCE CUTOFF VOLTAGE vs. ZERO-GATE VOLTAGE DRAIN CURRENT

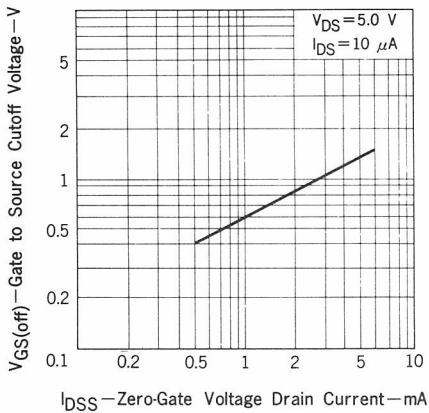


FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT

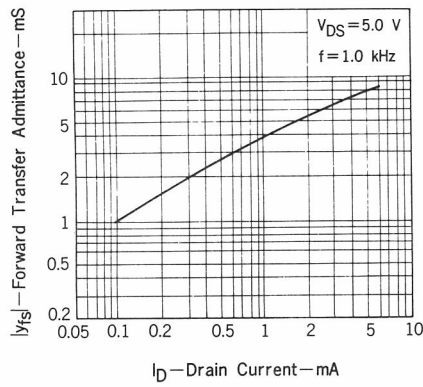


FEEDBACK CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE

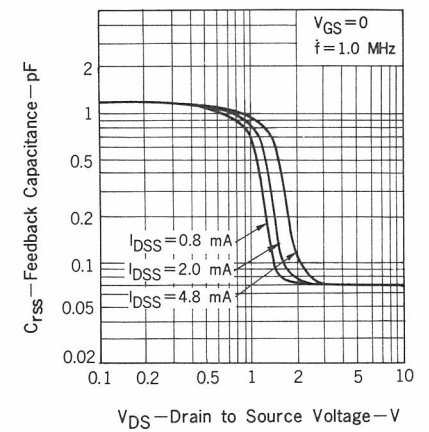


INPUT ADMITTANCE vs. FREQUENCY

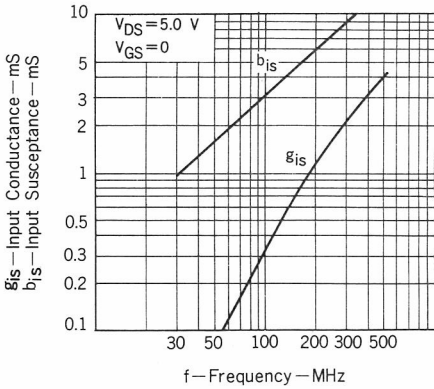

FORWARD TRANSFER ADMITTANCE vs. FREQUENCY

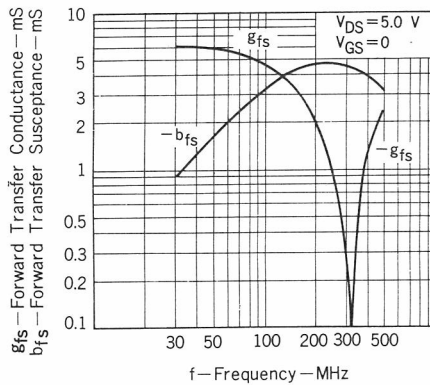


FEEDBACK TRANSFER ADMITTANCE vs. FREQUENCY

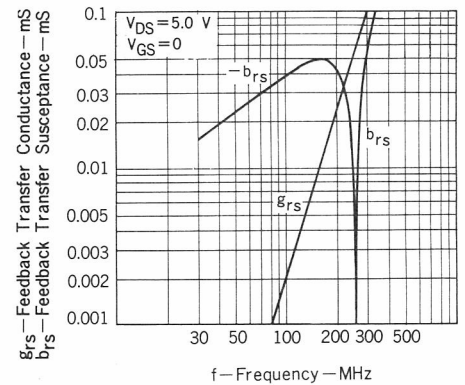


Phase-out/Discontinued


OUTPUT ADMITTANCE vs. FREQUENCY

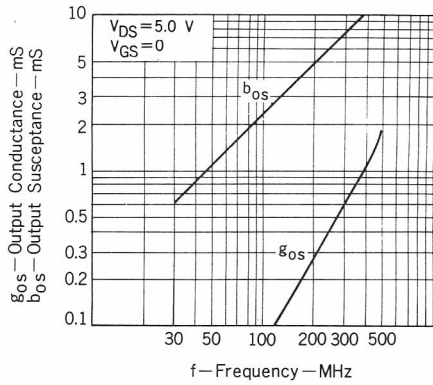


POWER GAIN AND NOISE FIGURE vs. ZERO-GATE VOLTAGE DRAIN CURRENT

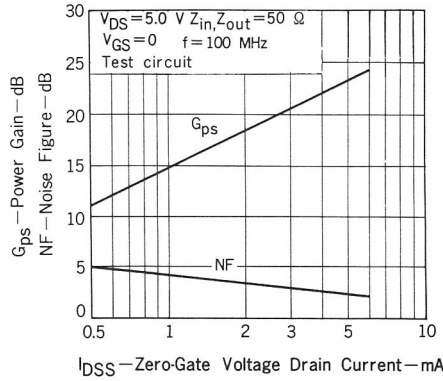


POWER GAIN vs. GATE TO SOURCE VOLTAGE

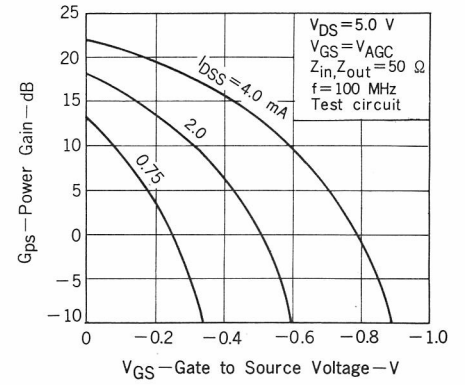

POWER GAIN AND NOISE FIGURE vs. SOURCE RESISTANCE

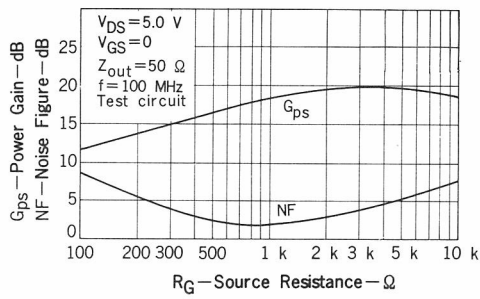

NOISE FIGURE and POWER GAIN TEST CIRCUIT (f = 100 MHz)

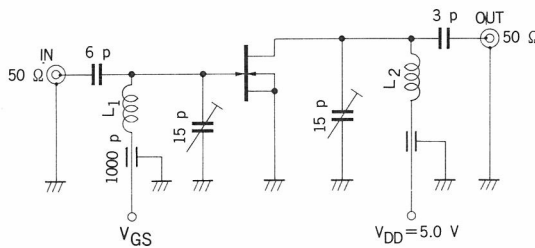

Phase-out/Discontinued**Nippon Electric Co., Ltd.****INTERNATIONAL ELECTRON DEVICES DIV.**

NEC Building, 33-1, Shiba Gochome
Minato-ku, Tokyo 108, Japan
Tel: Tokyo 454-1111
Telex Address: NECTOK J22686
Cable Address: MICROPHONE TOKYO

NEC HONG KONG Limited

Flat A, 7/F., Chuan Kei Factory Building,
No. 15-23, Kin Hong Street, Kwai Chung,
New Territories, Hong Kong
Tel: 0-242824, 242825
Telex Address: HKNEC HX 84561

NEC HONG KONG Limited, Taipei Branch

Room 701 Chiu Bldg. 152
Sec. 1, Chung Shan N. Road
Taipei Taiwan
Tel: 5224192, 5224258
Telex Address: HKNEC TP 22372

NEC SINGAPORE PTE. LTD.

JTC Flatted Factory Building,
Block 12, 50 Kallang Bahru,
Kallang Basin Industrial Estate
Singapore 1233
Tel: 2923616, 2925648
Telex Address: NECSIN RS 24350