

TRIPLE DIFFUSED PLANER TYPE  
HIGH VOLTAGE, HIGH SPEED SWITCHING


## ■ Features

- High voltage, High speed switching
- High reliability

## ■ Applications

- Switching regulators
- Ultrasonic generators
- High frequency inverters
- General purpose power amplifiers

## ■ Outline Drawings

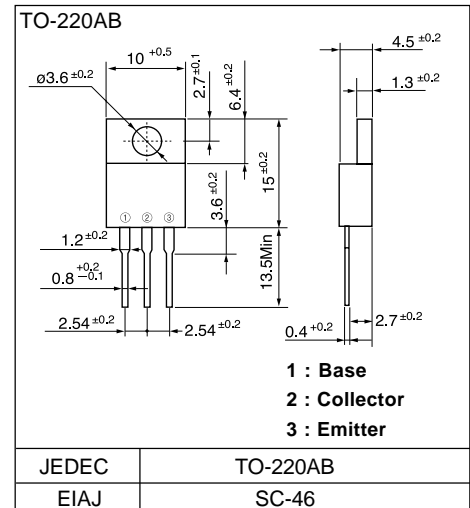

## ■ Maximum ratings and characteristics

### ● Absolute maximum ratings ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Ratings	Unit
Collector-Base voltage	$V_{CB0}$	450	V
Collector-Emitter voltage	$V_{CE0}$	400	V
Collector-Emitter voltage	$V_{CE0(SUS)}$	400	V
Emitter-Base voltage	$V_{EB0}$	7	V
Collector current	$I_C$	5	A
Base current	$I_B$	1.5	A
Collector power dissipation	$P_C$	40	W
Operating junction temperature	$T_j$	+150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-45 to +150	$^\circ\text{C}$






### ● Electrical characteristics ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Base voltage	$V_{CB0}$	$I_{CBO} = 1\text{mA}$	450			V
Collector-Emitter voltage	$V_{CE0}$	$I_{CEO} = 10\text{mA}$	400			V
Collector-Emitter voltage	$V_{CE0(SUS)}$	$I_C = 1\text{A}$	400	-		V
Emitter-Base voltage	$V_{EB0}$	$I_{EBO} = 0.1\text{mA}$	7	-		V
Collector-Base leakage current	$I_{CBO}$	$V_{CB0} = 450\text{V}$		-	1.0	mA
Emitter-Base leakage current	$I_{EBO}$	$V_{EB0} = 7\text{V}$		-	0.1	mA
D.C. current gain	$h_{FE}$	$I_C = 2\text{A}$ , $V_{CE} = 5\text{V}$	10			
Collector-Emitter saturation voltage	$V_{CE(Sat)}$	$I_C = 2\text{A}$ , $I_B = 0.4\text{A}$			1.2	V
Base-Emitter saturation voltage	$V_{BE(Sat)}$				1.5	V
*1	$t_{on}$	$I_C = 4\text{A}$ , $I_{B1} = 0.8\text{A}$			1.0	$\mu\text{s}$
Switching time	$t_{stg}$	$I_{B2} = -0.8\text{A}$ , $R_L = 20\ \text{ohm}$			2.0	$\mu\text{s}$
	$t_f$	$P_w = 20\ \mu\text{s}$ Duty= $<2\%$			1.0	$\mu\text{s}$

### ● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	$R_{th(j-c)}$	Junction to case			3.0	$^\circ\text{C/W}$

Characteristics

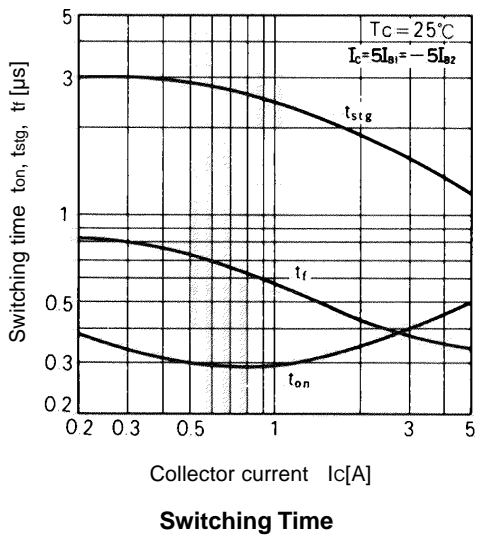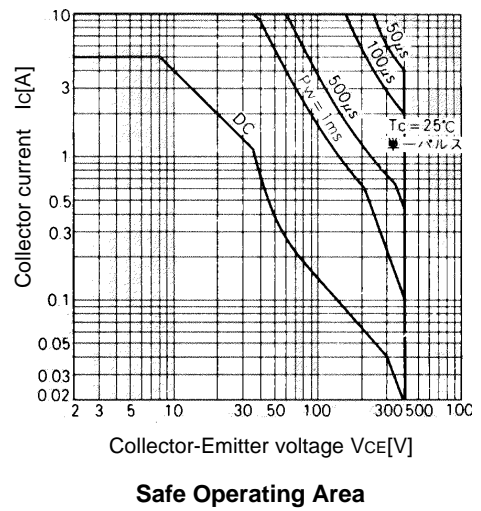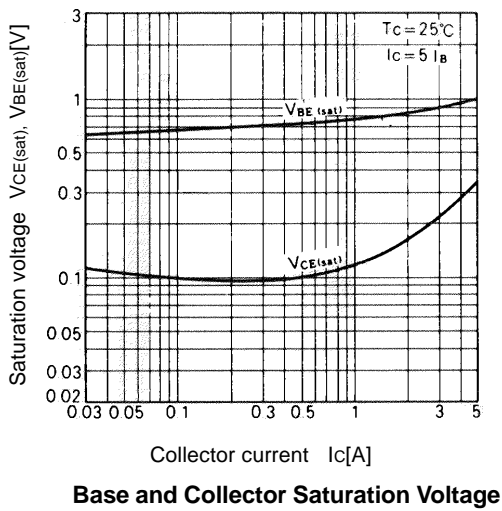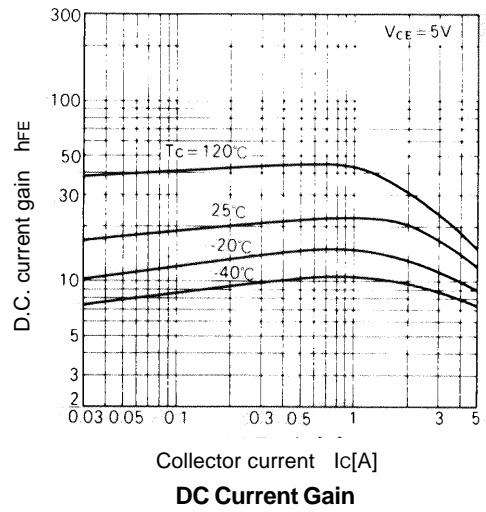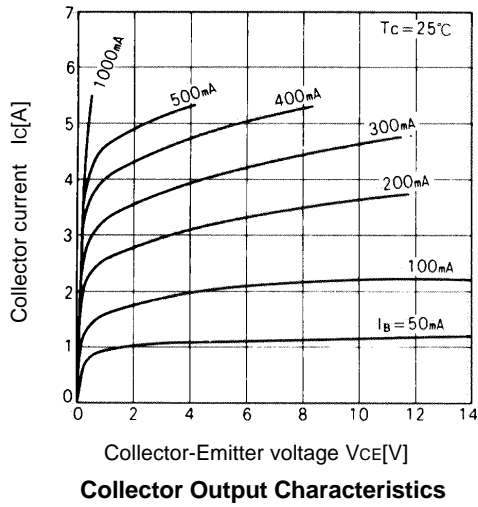

\*1 Switching Time Test Circuit

