

High h_{FE}
LOW $V_{CE(sat)}$

2SC4024

Silicon NPN Epitaxial Planar Transistor

Application : DC-DC Converter, Emergency Lighting Inverter and General Purpose


Absolute maximum ratings ($T_a=25^\circ\text{C}$)

| Symbol | 2SC4024 | Unit |
|-----------|------------------------------|------------------|
| V_{CBO} | 100 | V |
| V_{CEO} | 50 | V |
| V_{EBO} | 15 | V |
| I_C | 10 | A |
| I_B | 3 | A |
| P_C | 35($T_C=25^\circ\text{C}$) | W |
| T_J | 150 | $^\circ\text{C}$ |
| T_{stg} | -55 to +150 | $^\circ\text{C}$ |

Electrical Characteristics ($T_a=25^\circ\text{C}$)

| Symbol | Conditions | 2SC4024 | Unit |
|---------------|---------------------------------------|-------------|---------------|
| I_{CBO} | $V_{CB}=100\text{V}$ | 10max | μA |
| I_{EBO} | $V_{EB}=15\text{V}$ | 10max | μA |
| $V_{(BR)CEO}$ | $I_C=25\text{mA}$ | 50min | V |
| h_{FE} | $V_{CE}=4\text{V}, I_C=1\text{A}$ | 300 to 1600 | |
| $V_{CE(sat)}$ | $I_C=5\text{A}, I_B=0.1\text{A}$ | 0.5max | V |
| f_r | $V_{CE}=12\text{V}, I_E=-0.5\text{A}$ | 24typ | MHz |
| COB | $V_{CB}=10\text{V}, f=1\text{MHz}$ | 150typ | pF |


External Dimensions FM20(TO220F)

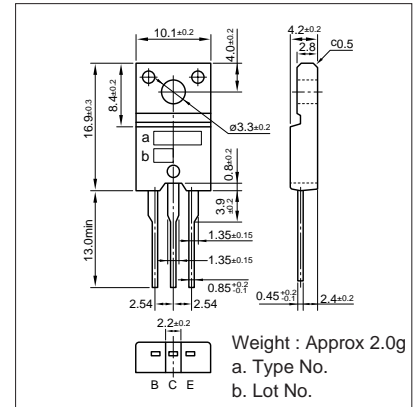


Typical Switching Characteristics (Common Emitter)

| V_{CC} (V) | R_L (Ω) | I_C (A) | I_{B1} (A) | I_{B2} (A) | t_{on} (μs) | t_{stg} (μs) | t_f (μs) |
|--------------|--------------------|-----------|--------------|--------------|----------------------------|-----------------------------|-------------------------|
| 20 | 4 | 5 | 0.1 | -0.1 | 0.5typ | 2.0typ | 0.5typ |


I_C-V_{CE} Characteristics (Typical)

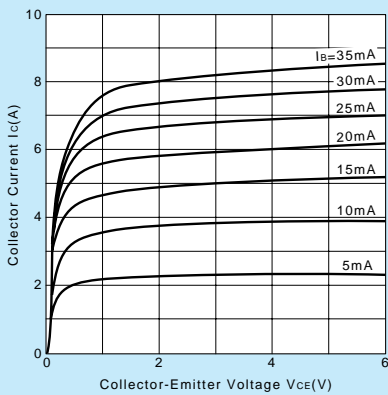


$V_{CE(sat)}-I_B$ Characteristics (Typical)

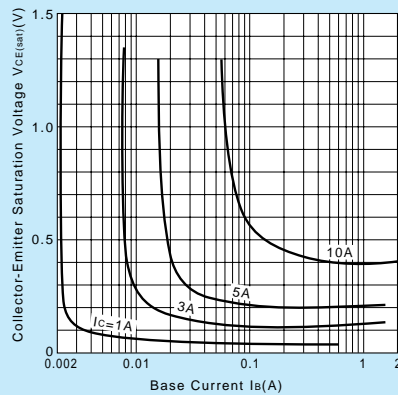


I_C-V_{BE} Temperature Characteristics (Typical)

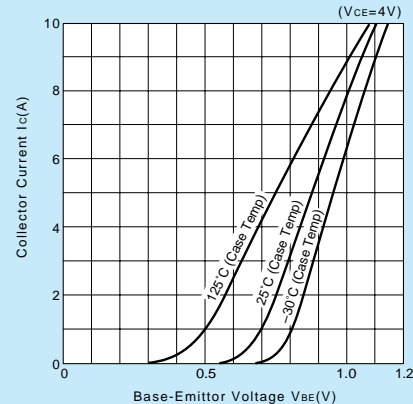


$h_{FE}-I_C$ Characteristics (Typical)

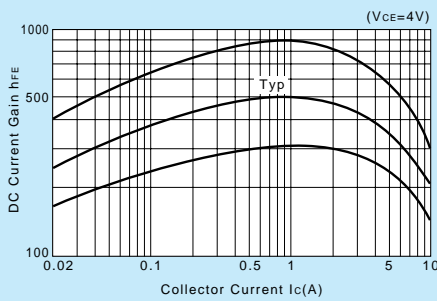


$h_{FE}-I_C$ Temperature Characteristics (Typical)

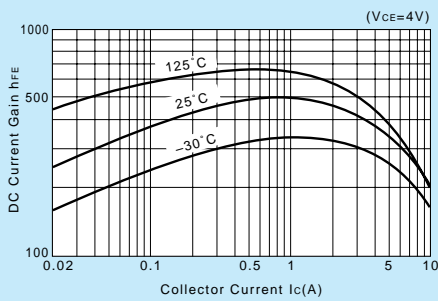


$\theta_{j-a}-t$ Characteristics

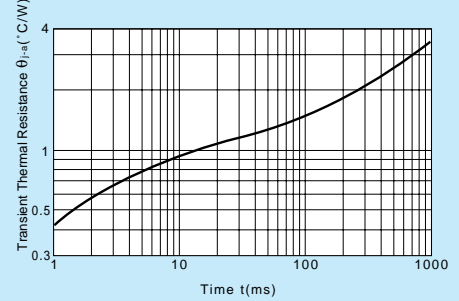

f_T-I_E Characteristics (Typical)

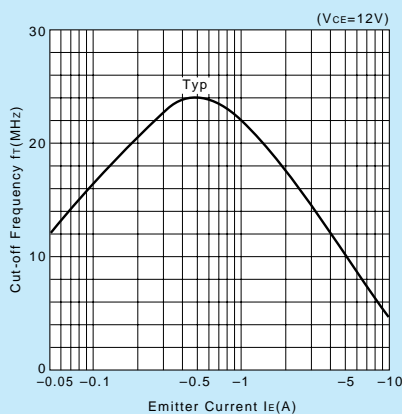

Safe Operating Area (Single Pulse)

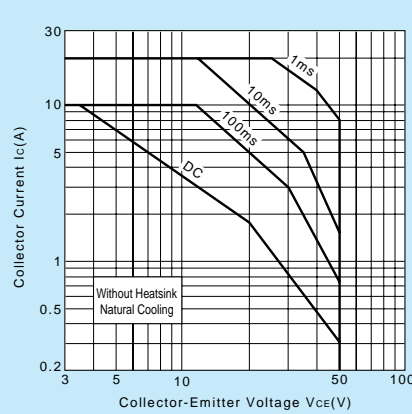

P_C-T_a Derating

