


GENERAL PURPOSE APPLICATION.  
SWITCHING APPLICATION.

### FEATURES

- Excellent  $h_{FE}$  Linearity  
:  $h_{FE(2)}=25(\text{Min.})$ , ( $V_{CE}=2V$ ,  $I_C=200\text{mA}$ ).
- Complementary to KTA200.

### MAXIMUM RATING ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	60	V
Collector-Emitter Voltage	$V_{CEO}$	45	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	500	mA
Emitter Current	$I_E$	-500	mA
Collector Power Dissipation	$P_C$	625	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 ~ 150	$^\circ\text{C}$





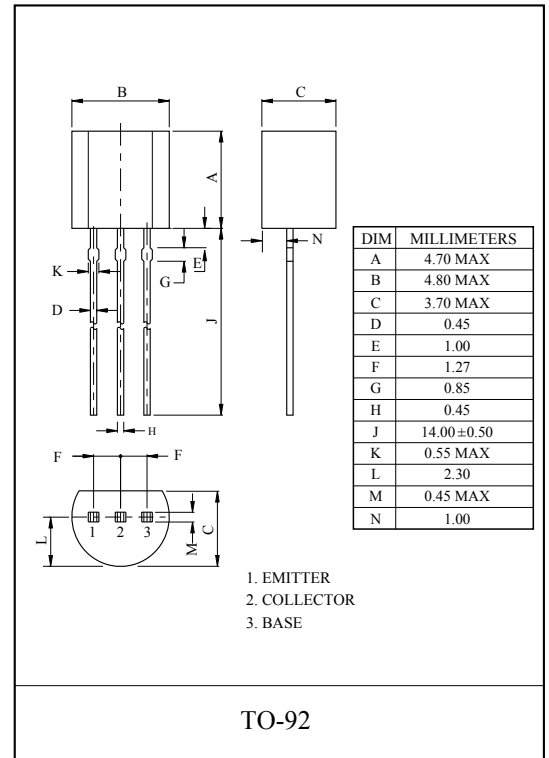


### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=50V$ , $I_E=0$	-	-	0.1	$\mu\text{A}$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V$ , $I_C=0$	-	-	0.1	$\mu\text{A}$
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=2V$ , $I_C=50\text{mA}$	70	-	240	
	$h_{FE(2)}$	$V_{CE}=2V$ , $I_C=200\text{mA}$	25	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100\text{mA}$ , $I_B=10\text{mA}$	-	-	0.25	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=2V$ , $I_C=200\text{mA}$	-	-	1.0	V
Transition Frequency	$f_T$	$V_{CE}=6V$ , $I_C=20\text{mA}$	-	300	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=6V$ , $I_E=0$ , $f=1\text{MHz}$	-	7.0	-	pF

Note :  $h_{FE}$  Classification O:70 ~ 140, Y:120 ~ 240

# KTC200

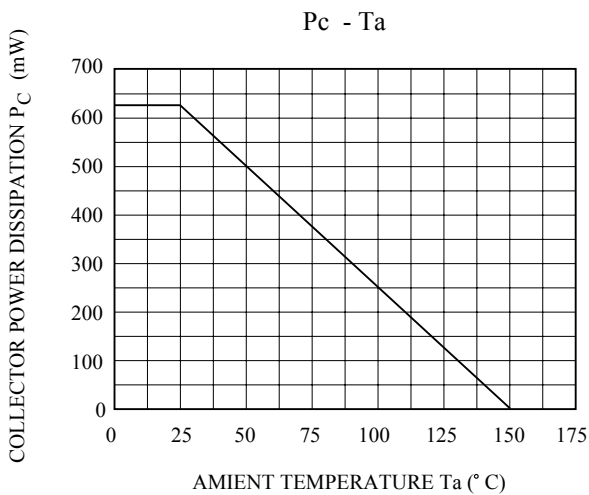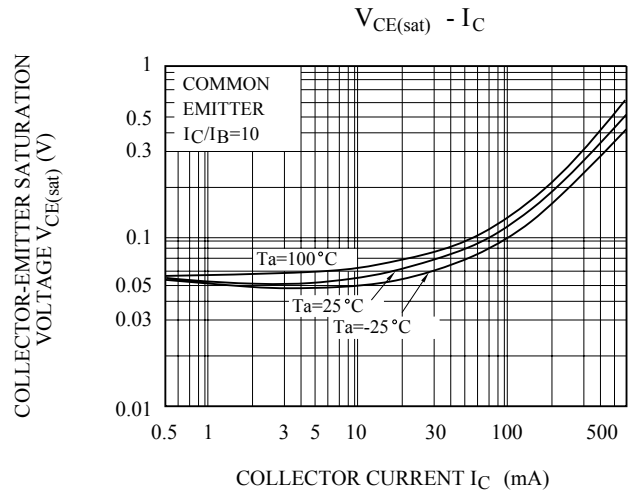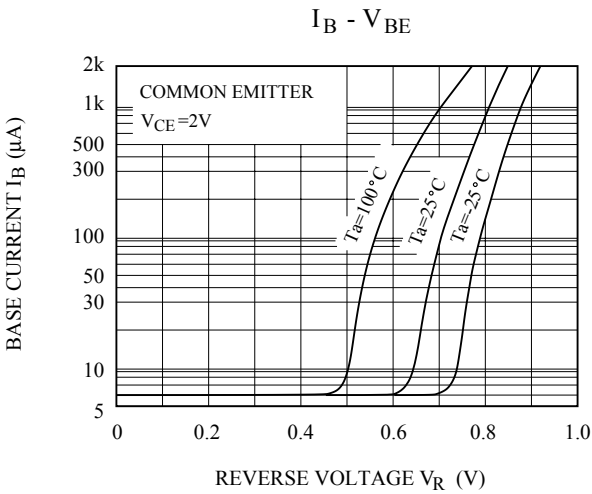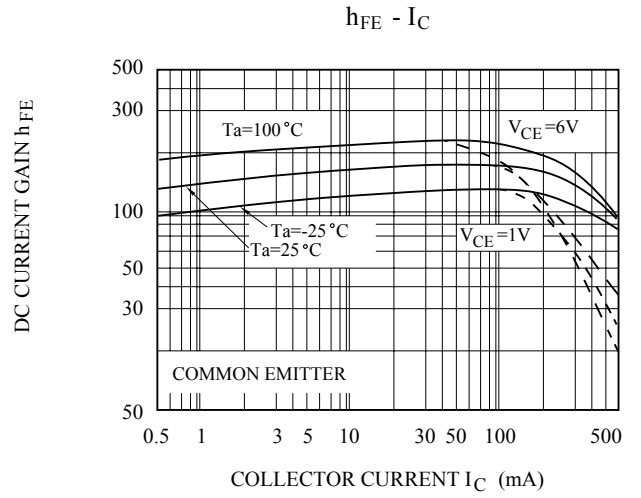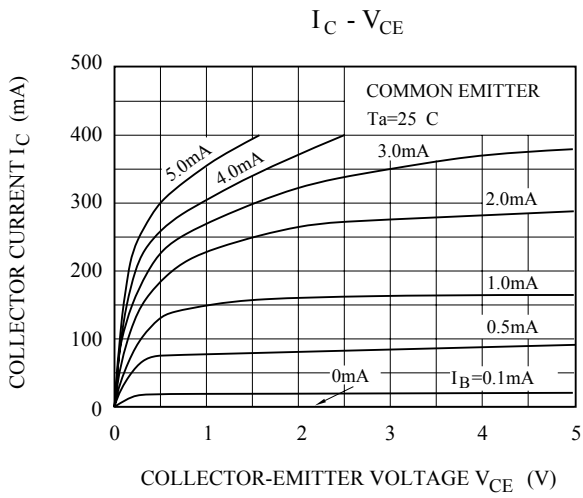

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.