




**BU932**

**NPN SILICON TRANSISTOR**

**SWITCHING REGULATORS PWM INVERTERS  
SOLENOID AND RELAY DRIVERS**

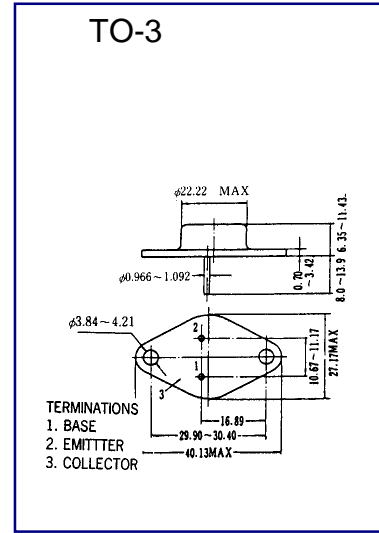

**ABSOLUTE MAXIMUM RATINGS (Ta=25°C)**

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	VCBO	500	V
Collector-Emitter Voltage	VCEO	450	V
Collector Current (DC)	IC	15	A
Collector Dissipation (Tc=25°C)	PC	175	W
Junction Temperature	Tj	200	°C
Storage Temperature	Tstg	-50~150	°C

**ELECTRICAL CHARACTERISTICS (Ta=25°C)**

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	ICBO	VCB= 500V , IE=0			10	μA
Collector Cutoff Current	ICEO	VCB=450V , IB=0			10	μA
DC Current Gain	hFE	VCE=5V , IC=8A	50			
Collector- Emitter Saturation Voltage	VCE(sat)	IC=6A , IB=0.6A			1.5	V

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.