


BUS-CONTROLLED VIDEO MATRIX SWITCH

- 15MHz BANDWIDTH
- CASCADABLE WITH ANOTHER TEA6416 (INTERNAL ADDRESS CAN BE CHANGED BY PIN 7 VOLTAGE)
- 8 INPUTS (CVBS, RGB, MAC, CHROMA...)
- 6 OUTPUTS
- EACH INPUT INTERNALLY BIASED@ $V_{CC}/2$ BY RESISTOR NETWORK
- BUS CONTROLLED
- 6.5dB GAIN BETWEEN ANY INPUT AND OUTPUT
- - 50dB CROSSTALK AT 5MHz
- FULLY ESD PROTECTED

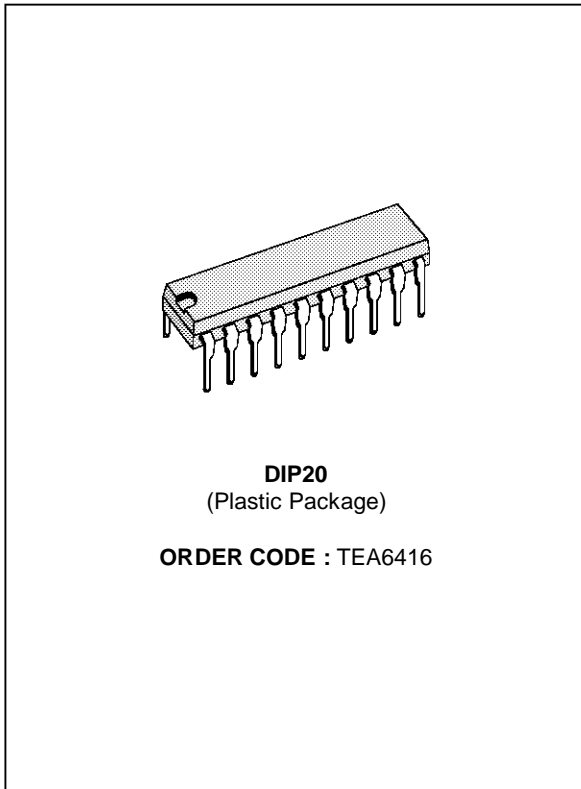


DESCRIPTION

The main function of the TEA6416 is to switch 8 video input sources on the 6 outputs.

Each output can be switched to only one of the inputs whereas but any same input may be connected to several outputs.


All the switching possibilities are controlled through the I²C Bus.

PIN CONNECTIONS

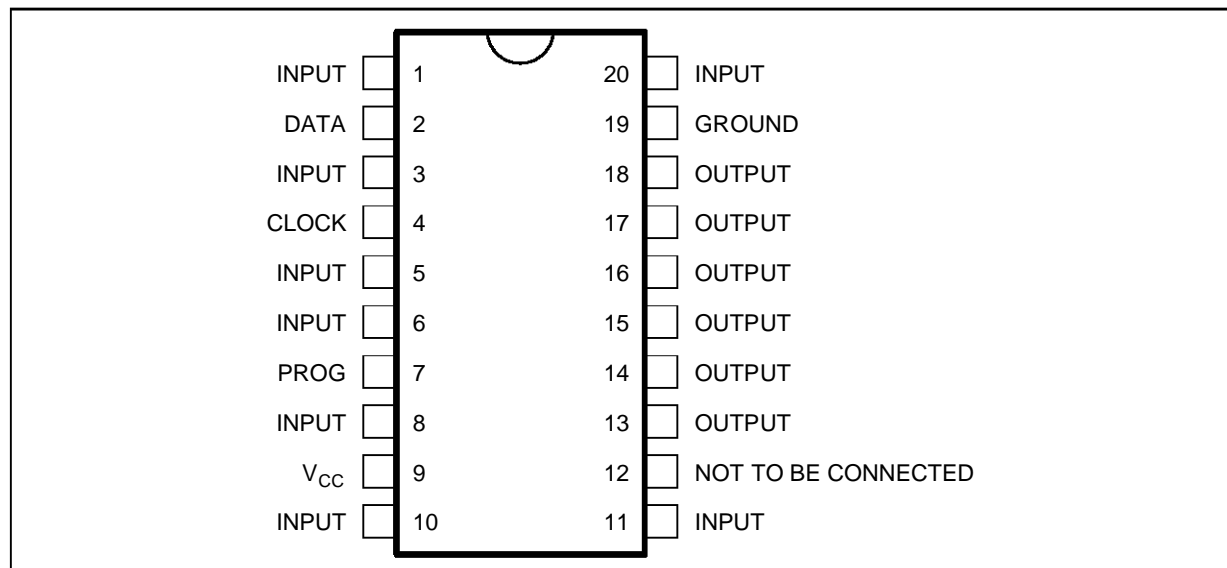

6416-01EPS

BLOCK DIAGRAM

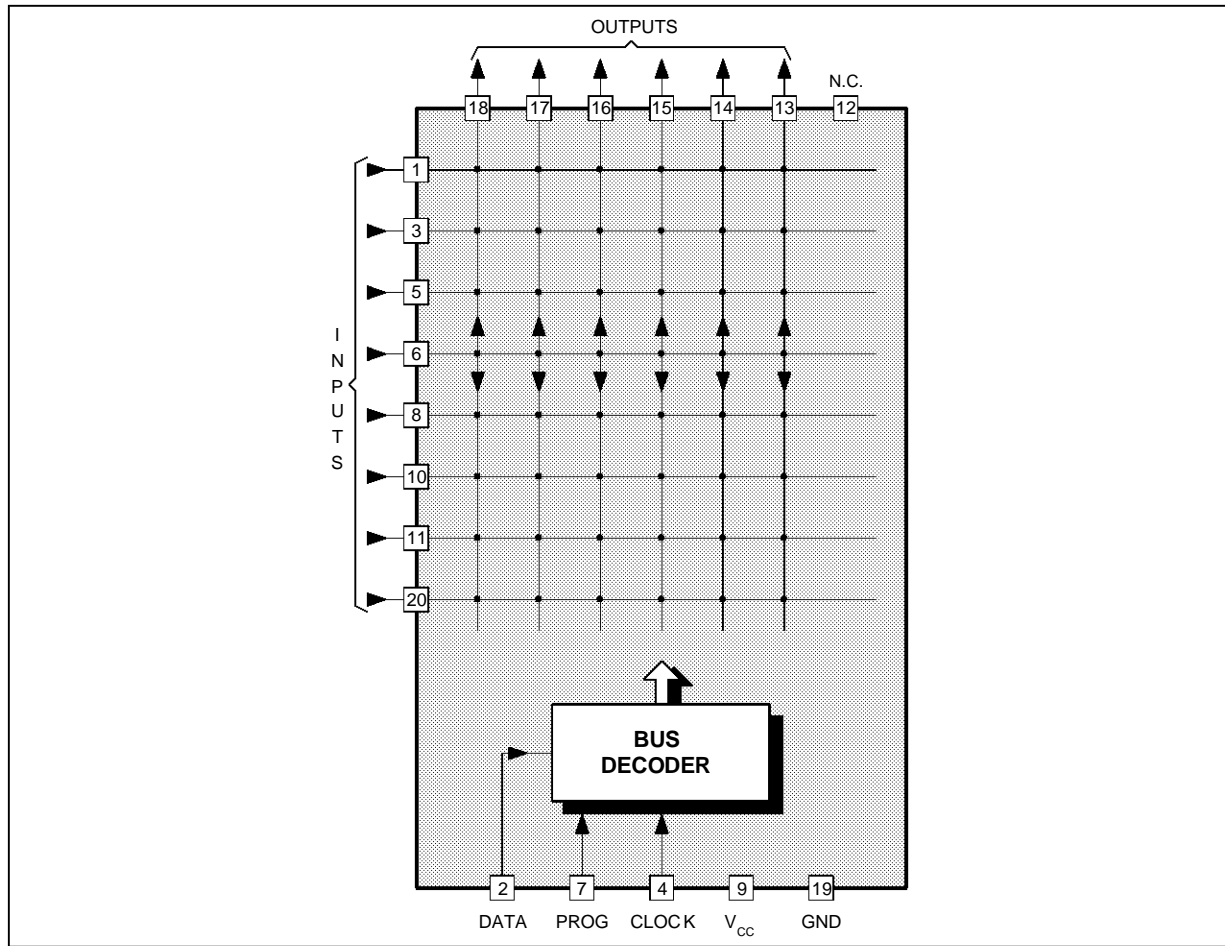

6416-02.EPS

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|------------------|-------------------------------------|-------------|------|
| V _{CC} | Supply Voltage (pin 9) | 13 | V |
| T _A | Operating Ambient Temperature Range | 0 to +70 | °C |
| T _{stg} | Storage Temperature Range | -20 to +150 | °C |

6416-01.TBL

THERMAL DATA

| Symbol | Parameter | Value | Unit |
|----------------------|-------------------------------------|-------|------|
| R _{th(j-a)} | Junction-Ambient Thermal Resistance | 80 | °C/W |

6416-02.TBL

ELECTRICAL CHARACTERISTICS

T_A = 25°C , V_{CC} = 10V , R_{LOAD} = 10kΩ , C_{LOAD} = 3pF (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|-----------------|---|------|------|------|------|
| V _{CC} | Supply Voltage (pin 9) | 8 | 10 | 11 | V |
| I _{CC} | Power Supply Current (without load on outputs ; V _{CC} =10V) | 20 | 30 | 40 | mA |

6416-03.TBL

ELECTRICAL CHARACTERISTICS (continued)

$T_A = 25^\circ\text{C}$, $V_{CC} = 10\text{V}$, $R_{LOAD} = 10\text{k}\Omega$, $C_{LOAD} = 3\text{pF}$ (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|--------|--|------|------|------|------------------|
| INPUTS | | | | | |
| | Maximum Signal Amplitude (CVBS signal) | 2 | 2.5 | | V_{PP} |
| | Input Resistance | 30 | 45 | | $\text{k}\Omega$ |
| | DC Level (1 input linked with 1 output) | 4.75 | 5 | 5.25 | V |
| | DC Level Shift (temperature from 0 to 70°C) | | 5 | 100 | mV |

OUTPUTS ($V_{IN} = 1V_{PP}$ for all dynamic tests) Pins 13 - 14 - 15 - 16 - 17 - 18

| | | | | | |
|--|---|-----|----------|-----|------------|
| | Dynamic | 4.5 | 5.5 | | V_{PP} |
| | Output Impedance | | 25 | 50 | Ω |
| | Gain | 5.5 | 6.5 | 7.5 | dB |
| | Bandwidth | 7 | 10 15 | | MHz MHz |
| | Crosstalk (f = 5MHz) | | -50 | | dB |
| | DC level (1 input linked with 1 output) | 5.2 | 5.7 | 6.2 | V |

$I^2\text{C}$ BUS INPUT : DATA, CLOCK, PROG (Pins 2 - 4 - 7)

| | | | | | |
|--|-------------------|-----|---|--|--|
| | Threshold Voltage | 1.5 | 2 | | |
|--|-------------------|-----|---|--|--|

6416-04.TBL

GENERAL DESCRIPTION

The main function of the IC is to switch 8 video input sources on 6 outputs.

Each output can be switched on only one of each input. Each input is connected to $V_{CC}/2$ through a resistive network (no clamp on sync. bottom).

Each nominal gain between any input and output is 6.5dB. All the switching possibilities are changed through the BUS.

Driving 75Ω load needs an external transistor.

It is possible to have the same input connected to several outputs.

The starting configuration upon power on (power supply : 0 to 10V) is undetermined. In this case, 6 words of 16 bits are necessary to determine one configuration. In other case, 1 word of 16 bits is necessary to determine one configuration.

BUS SELECTIONS ($I^2\text{C}$ -BUS) - 2nd byte of transmission

| ADDRESS - MSB | DATA - LSB | Selected Output | |
|---------------|------------|-----------------|------------------------------------|
| 0000 | XXX | pin 18 | Output is selected by address bits |
| 00100 | XXX | pin 14 | |
| 00010 | XXX | pin 16 | |
| 00110 | --- | Not used | |
| 00001 | XXX | pin 17 | |
| 00101 | XXX | pin 13 | |
| 00011 | XXX | pin 15 | |
| 00111 | --- | Not used | |
| | | Selected Input | |
| 00XXX | 000 | pin 5 | Input is selected by data bits |
| 00XXX | 100 | pin 8 | |
| 00XXX | 010 | pin 3 | |
| 00XXX | 110 | pin 20 | |
| 00XXX | 001 | pin 6 | |
| 00XXX | 101 | pin 10 | |
| 00XXX | 011 | pin 1 | |
| 00XXX | 111 | pin 11 | |

6416-05.TBL

Example : 00100 101 connects pin 10 (input) to pin 14 (output)- (equals 25 in hexadecimal)

Address byte (1st byte of transmission)

| | | |
|----|------|------|
| 86 | 1000 | 0110 |
| 06 | 0000 | 0110 |

When pin PROG is connected to ground

When pin PROG is connected to V_{CC}

6416-06.TBL

IN / OUT PIN CONFIGURATION

Figure 1 : Input Configuration

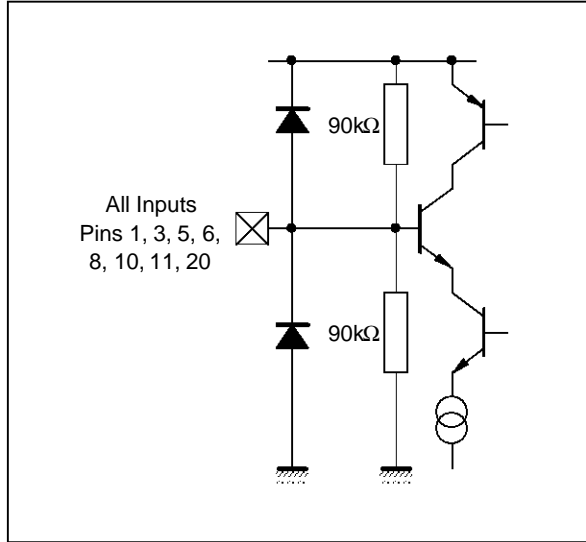


Figure 2 : Output Configuration

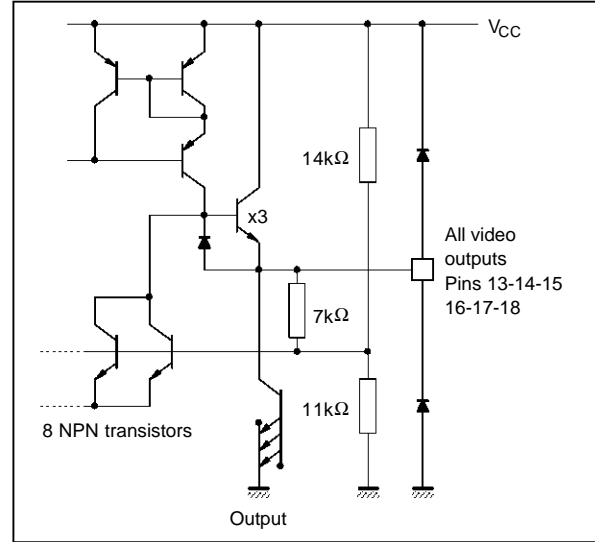


Figure 3 : Bus I/O Configuration



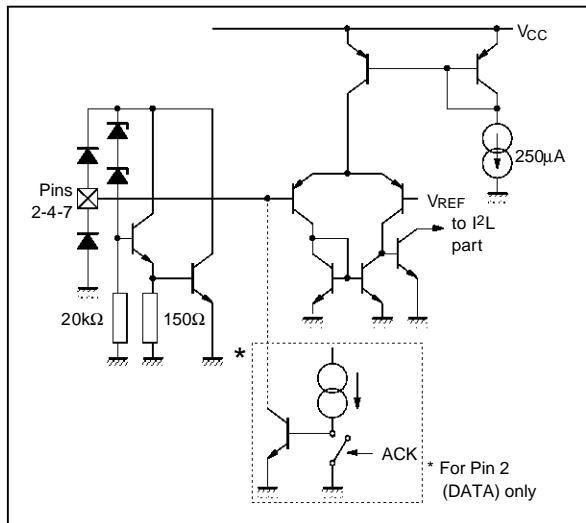


Figure 4 : VCC Pin Configuration

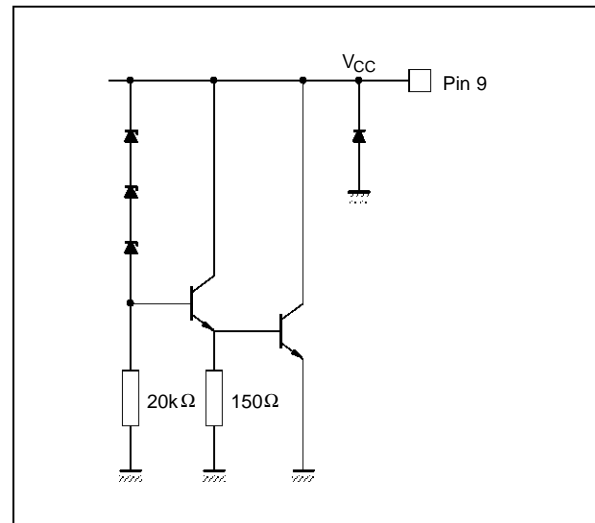


USE WITH AN OTHER TEA6416

The programming input (PROG) permits to operate with two TEA6416 in parallel and to select them independently through the I²C-BUS without modifying the address byte. Consequently, the switch capabilities are doubled or IC1 and IC2 can be cascaded.

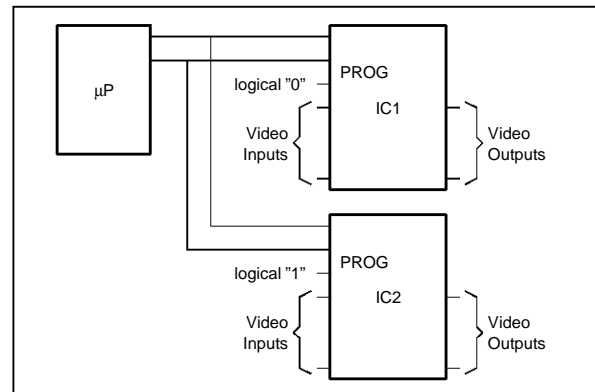

TYPICAL APPLICATION

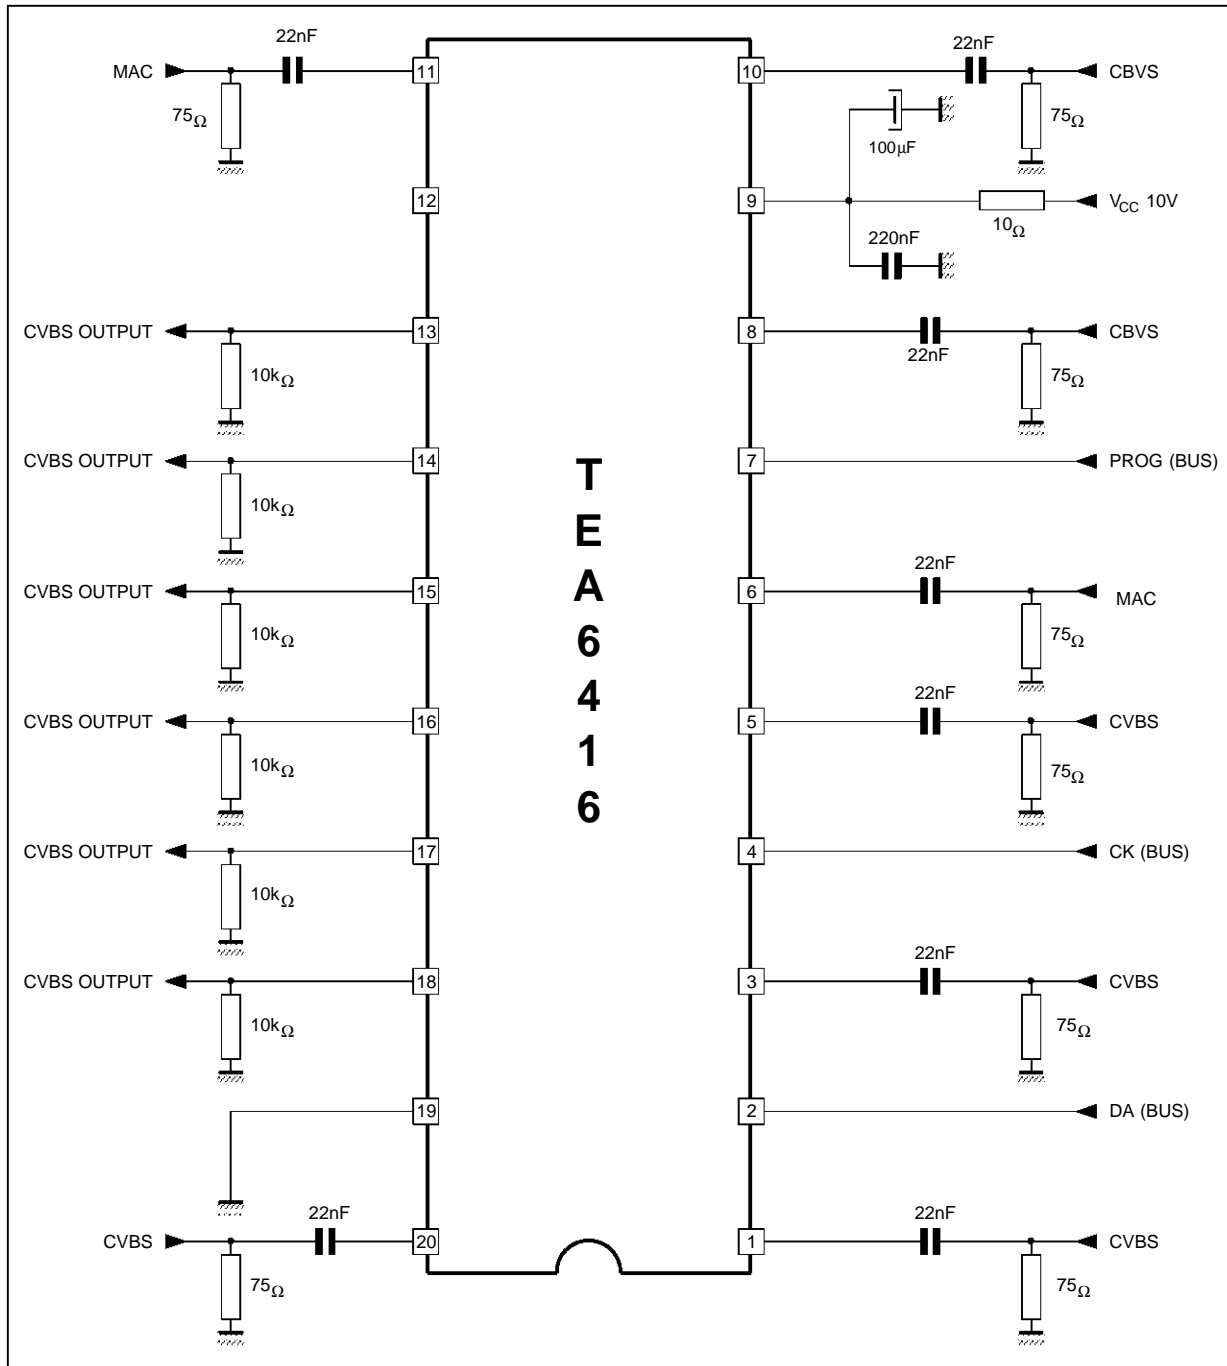

6416-08.EPS


CROSSTALK IMPROVEMENT

1 - When any input is not used, it must be bypassed to ground through a 22nF capacitor.

2 - An important improvement can be achieved considering the input crosstalk by means of the application (see technical note).

PACKAGE MECHANICAL DATA

20 PINS – PLASTIC DIP

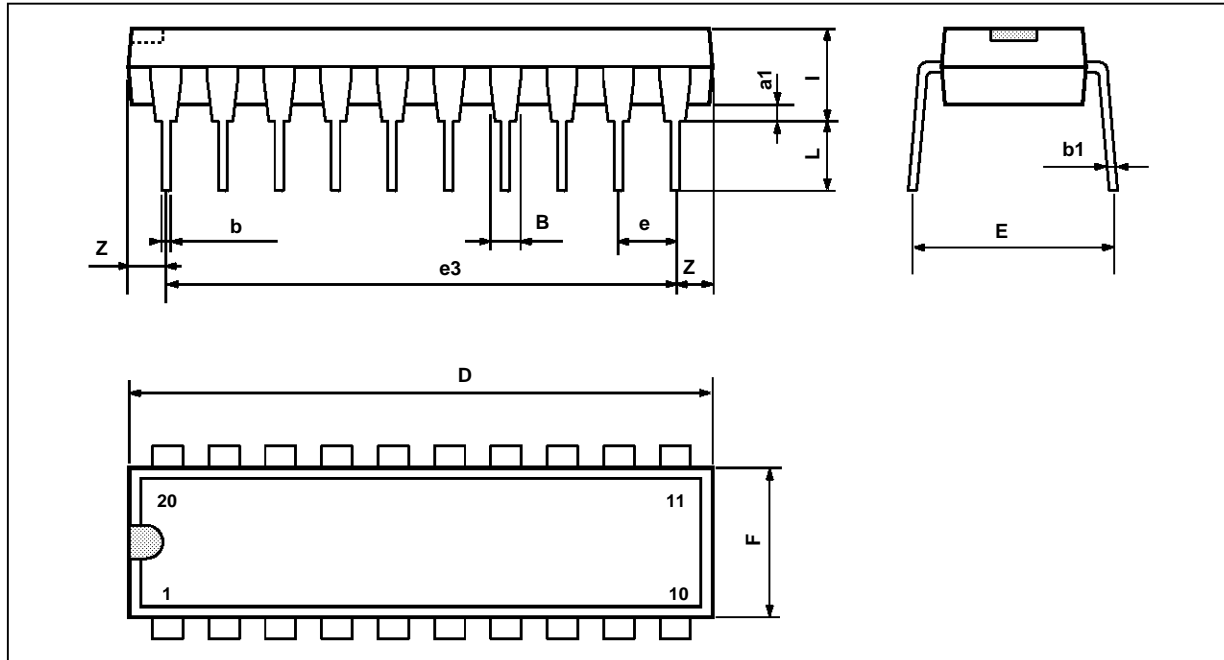

PM-DIP20.EPS

| Dimensions | Millimeters | | | Inches | | |
|------------|-------------|-------|------|--------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| a1 | 0.254 | | | 0.010 | | |
| B | 1.39 | | 1.65 | 0.055 | | 0.065 |
| b | | 0.45 | | | 0.018 | |
| b1 | | 0.25 | | | 0.010 | |
| D | | | 25.4 | | | 1.000 |
| E | | 8.5 | | | 0.335 | |
| e | | 2.54 | | | 0.100 | |
| e3 | | 22.86 | | | 0.900 | |
| F | | | 7.1 | | | 0.280 |
| i | | | 3.93 | | | 0.155 |
| L | | 3.3 | | | 0.130 | |
| Z | | | 1.34 | | | 0.053 |

DIP20.TBL

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No licence is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

Purchase of I²C Components of SGS-THOMSON Microelectronics, conveys a license under the Philips I²C Patent. Rights to use these components in a I²C system, is granted provided that the system conforms to the I²C Standard Specifications as defined by Philips.

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.