

# CNC1S171

## Optoisolator

For isolated signal transmission

### ■ Features

- High current transfer ratio : CTR >50%
- High I/O isolation voltage :  
V<sub>ISO</sub> = 5000 V<sub>rms</sub> (min.)
- Fast response :  
t<sub>r</sub> = 2 μs, t<sub>f</sub> = 3 μs(typ.)
- Low dark current : I<sub>CEO</sub> < 100nA
- VDE approved (VDE0884)
- UL listed (No. E79920)
- BSI certified  
(BS415 No. 7889, BS7002 No. 7890)
- SEMKO certified (No. 9625004)
- DEMKO certified (No. 305848)
- NEMKO certified (No. 199633176)
- FIMKO certified (No. 191784)
- CSA approved (No. CA109151)

### ■ Absolute Maximum Ratings (Ta = 25°C)

Parameter		Symbol	Ratings	Unit
Input (Light emitting diode)	Reverse voltage (DC)	V <sub>R</sub>	6	V
	Forward current (DC)	I <sub>F</sub>	50	mA
	Pulse forward current	I <sub>FP</sub> <sup>*1</sup>	1	A
	Power dissipation	P <sub>D</sub> <sup>*2</sup>	75	mW
Output (Photo transistor)	Collector current	I <sub>C</sub>	50	mA
	Collector to emitter voltage	V <sub>CEO</sub>	80	V
	Emitter to collector voltage	V <sub>ECO</sub>	7	V
Collector power dissipation		P <sub>C</sub> <sup>*3</sup>	150	mW
Isolation voltage, input to output		V <sub>ISO</sub>	5000	V <sub>rms</sub>
Total power dissipation		P <sub>T</sub>	200	mW
Operating ambient temperature		T <sub>opr</sub>	-30 to +100	°C
Storage temperature		T <sub>stg</sub>	-55 to +125	°C


### ■ Electrical Characteristics (Ta = 25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit
Input characteristics	Reverse current (DC)	I <sub>R</sub>	V <sub>R</sub> = 3V			10	μA
	Forward voltage (DC)	V <sub>F</sub>	I <sub>F</sub> = 50mA		1.35	1.5	V
	Capacitance between pins	C <sub>t</sub>	V <sub>R</sub> = 0V, f = 1MHz		15		pF
Output characteristics	Collector cutoff current	I <sub>CEO</sub>	V <sub>CE</sub> = 20V		5	100	nA
	Collector to emitter voltage	V <sub>CEO</sub>	I <sub>C</sub> = 100μA	80			V
	Collector to emitter capacitance	C <sub>C</sub>	V <sub>CE</sub> = 10V, f = 1MHz		10		pF
Transfer characteristics	DC current transfer ratio	CTR <sup>*1*4</sup>	V <sub>CE</sub> = 10V, I <sub>F</sub> = 5mA	50		600	%
	Isolation voltage, input to output	V <sub>ISO</sub>	t = 1 min., RH < 60%	5000			V <sub>rms</sub>
	Isolation capacitance, input to output	C <sub>ISO</sub>	f = 1MHz		0.7		pF
	Isolation resistance, input to output	R <sub>ISO</sub>	V <sub>ISO</sub> = 500V	10 <sup>11</sup>			Ω
	Rise time	t <sub>r</sub> <sup>*2</sup>	V <sub>CC</sub> = 10V, I <sub>C</sub> = 5mA,		2		μs
	Fall time	t <sub>f</sub> <sup>*3</sup>	R <sub>L</sub> = 100Ω		3		μs
Collector to emitter saturation voltage		V <sub>CE(sat)</sub>	I <sub>F</sub> = 20mA, I <sub>C</sub> = 1mA	0.1	0.2		V

<sup>\*1</sup> DC current transfer ratio (CTR) is a ratio of output current against DC input current.

<sup>\*2</sup> t<sub>r</sub> : Time required for the collector current to increase from 10% to 90% of its final value

<sup>\*3</sup> t<sub>f</sub> : Time required for the collector current to decrease from 90% to 10% of its initial value

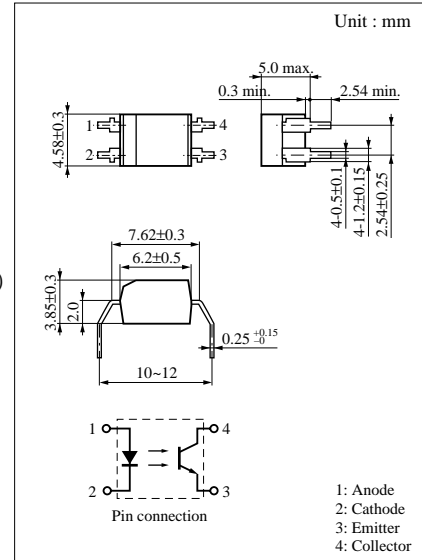







<sup>\*1</sup> Pulse width ≤ 100 μs, repeat 100 pps





<sup>\*2</sup> Input power derating ratio is 0.75 mW/°C at Ta ≥ 25°C.

<sup>\*3</sup> Output power derating ratio is 1.5 mW/°C at Ta ≥ 25°C.

\*4 CTR classifications

Class	Q	R	S
CTR (%)	50 to 120	100 to 250	200 to 600

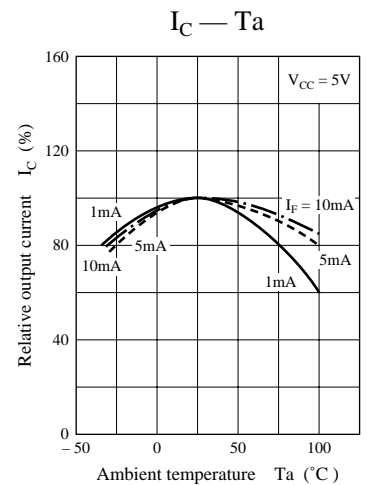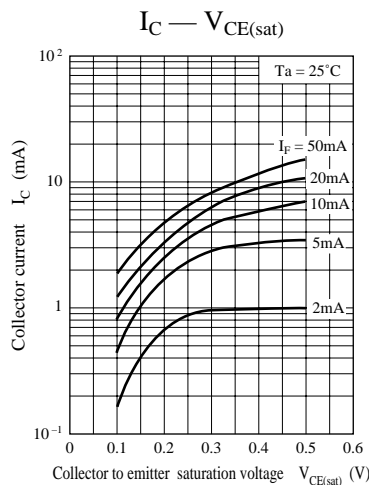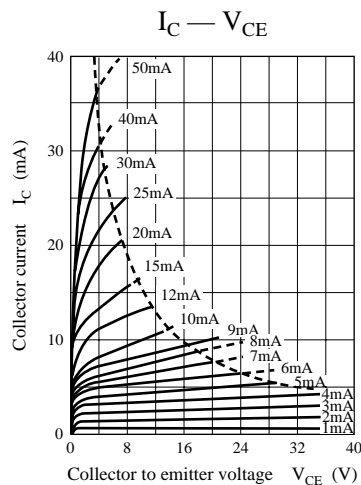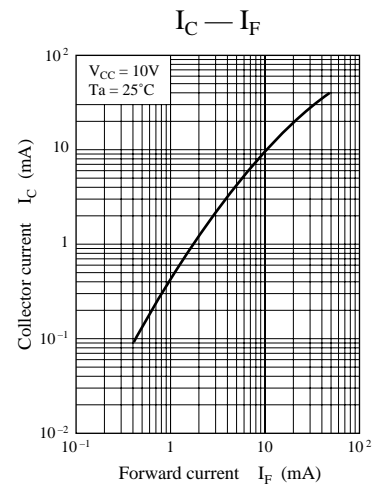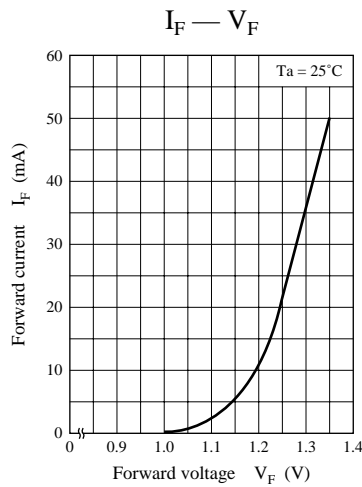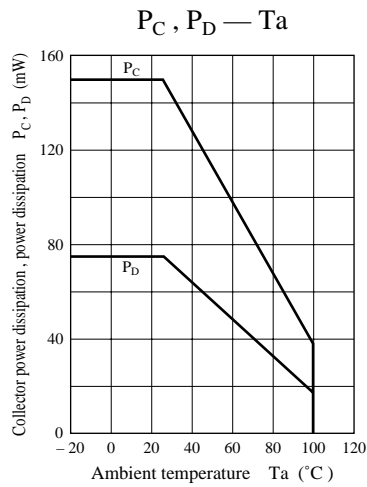

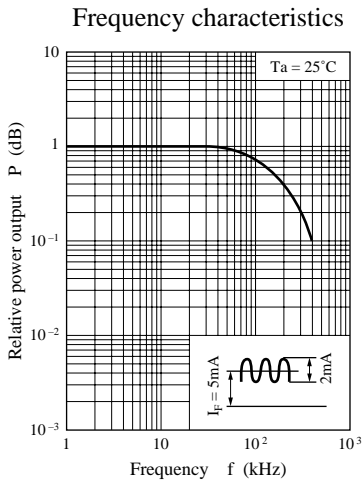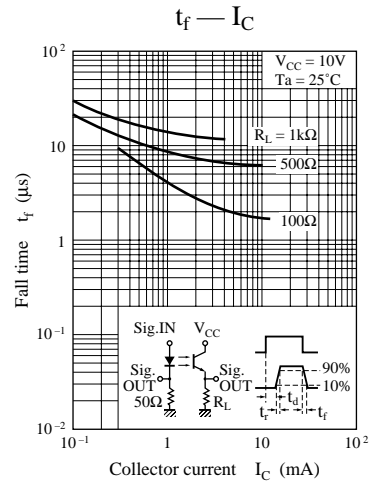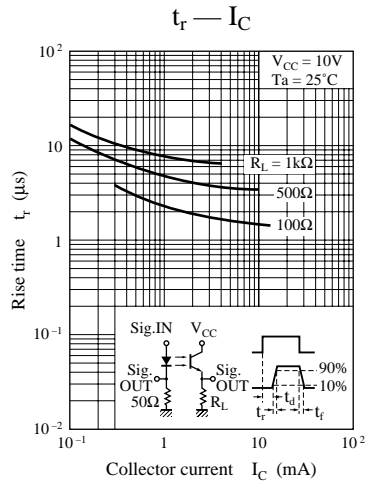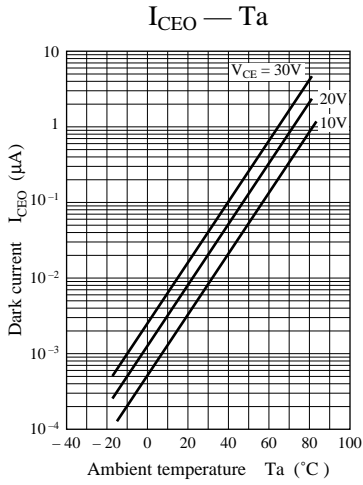

Measurement circuit of frequency characteristics

