


16A Fast Efficient Rectifiers

Features

- High surge current capability
- Low power loss, high efficiency
- Glass passivated chip junction
- 150°C operation junction temperature
- Low stored charge majority carrier conduction
- Low forward voltage, high current capability
- High switching speed 50 nanosecond recovery time
- RoHS Compliance

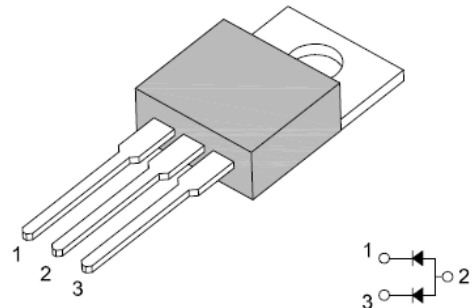

TO-220



Mechanical Data

Case:	TO-220, molded plastic
Epoxy:	Plastic package has UL flammability classification 94V-0
Terminals:	Lead, solderable per MIL-STD-202, Method 208
Polarity:	As marked
Mounting Torque:	10 in-lbs maximum
Weight:	0.08 ounces, 2.24 grams

Maximum Ratings and Electrical Characteristics ($T_A=25^\circ\text{C}$ unless noted otherwise)

Symbol	Description	FEN16FT	FEN16GT	FEN16HT	FEN16JT	Unit	Conditions
VRRM	Maximum Repetitive Peak Reverse Voltage	300	400	500	600	V	
VRMS	Maximum RMS Voltage	210	280	350	420	V	
VDC	Maximum DC Blocking Voltage	300	400	500	600	V	
IF(AV)	Maximum Average Forward Rectified Current	8.0				A	Tc=125°C, per leg
		16				A	Tc=125°C, per total device
IFM	Peak Repetitive Forward Current	16				A	Rate VR, Square Wave, 20KHz, Tc=125°C
IFSM	Non-Repetitive Peak Forward Surge Current per leg	125				A	Surge applied at rate load conditions half wave, single phase, 60Hz

16A Fast Efficient Rectifiers

FEN16FT - FEN16JT

Symbol	Description	FEN16FT	FEN16GT	FEN16HT	FEN16JT	Unit	Conditions
V_F	Maximum Instantaneous Forward Voltage	1.30		1.50		V	I _F =8.0A, T _C =25° C
		1.12		1.34			I _F =8.0A, T _C =100° C
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	10				μA	T _C =25° C
		500					T _C =125° C
T_{rr}	Typical Reverse Recovery Time	50				nS	I _F =0.5A, I _R =1A, I _{rr} =0.25A
C_J	Typical Junction Capacitance	70				pF	V _R =4V, f=1MHz
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-65 to +150				° C	

Typical Characteristics Curves

Fig.1-Forward Current Derating Curve


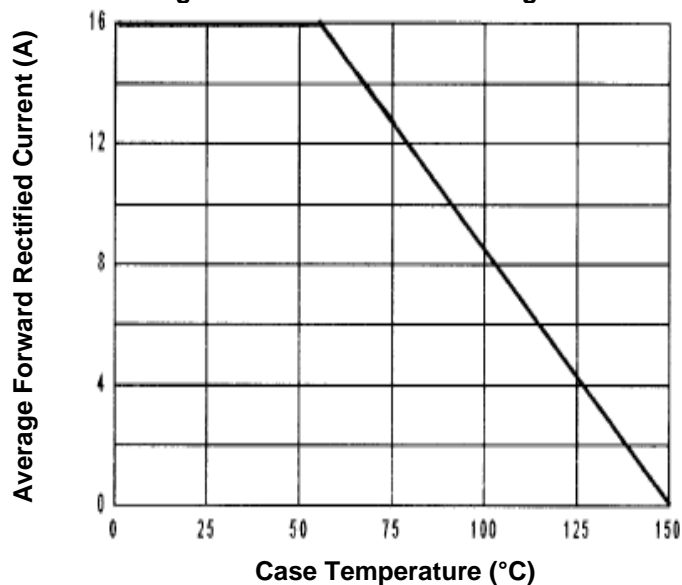


Fig.2-Max. Non-Repetitive Peak Forward Surge Current

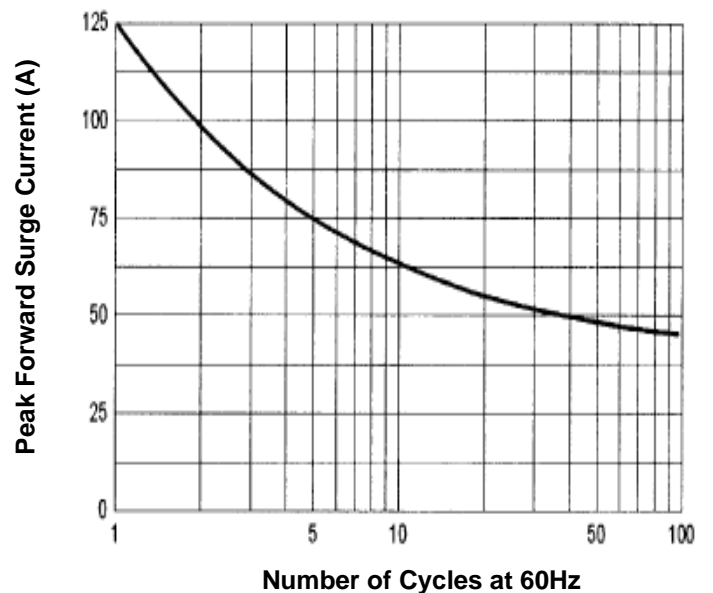

16A Fast Efficient Rectifiers

FEN16FT - FEN16JT

Fig.3- Typical Forward Characteristics

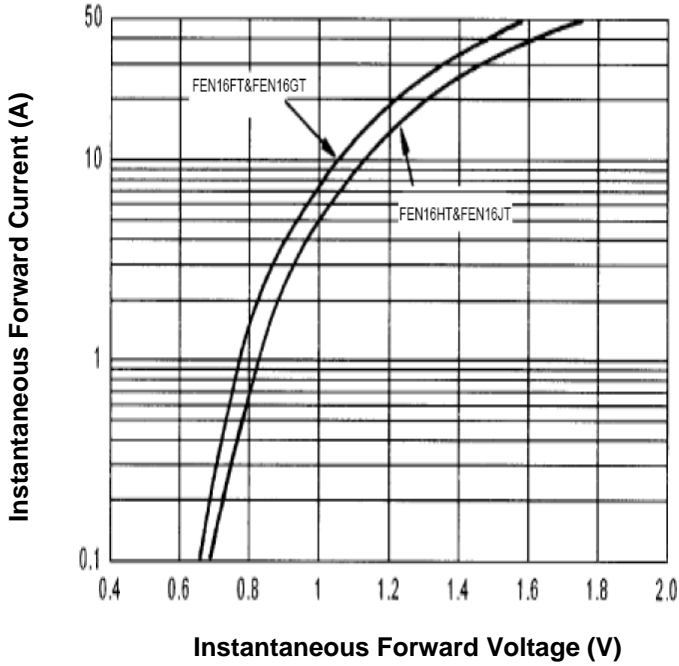


Fig.4-Typical Reverse Characteristics

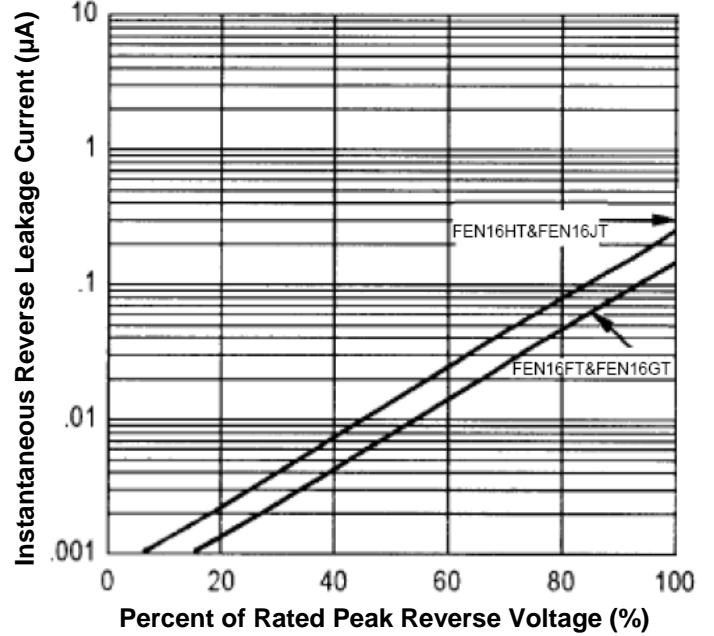


Fig.5- Typical Junction Capacitance



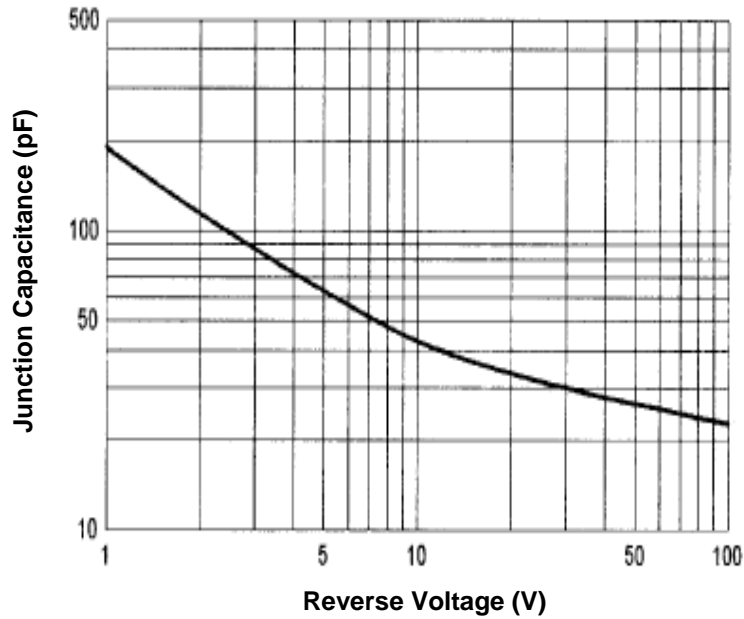


Fig.6- Reverse Recovery Time Characteristic and Test Circuit Diagram

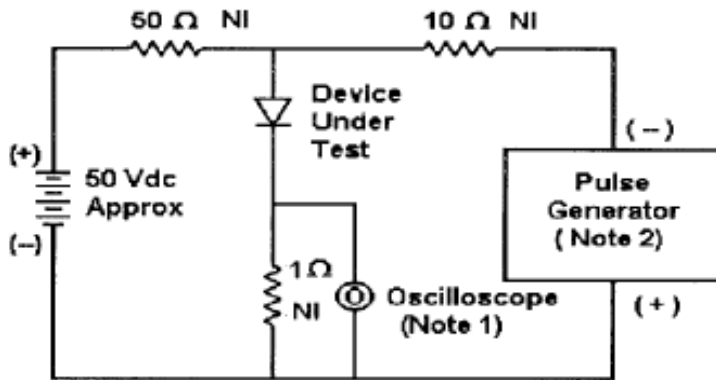

Notes:

- 1. Rise Time = 7 ns max. Input Impedance = 1 M Ω , 22 pF
- 2. Rise Time = 10 ns max. Input Impedance = 50 Ω

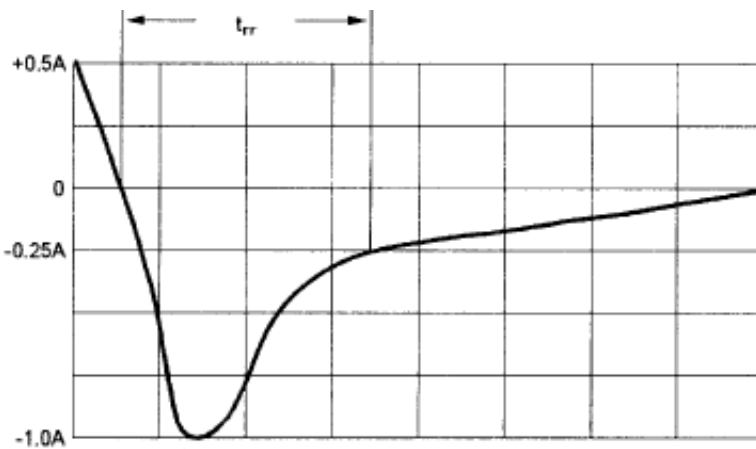


Set time base for 10/20 ns/div


16A Fast Efficient Rectifiers

FEN16FT - FEN16JT

Dimensions in inches (mm)

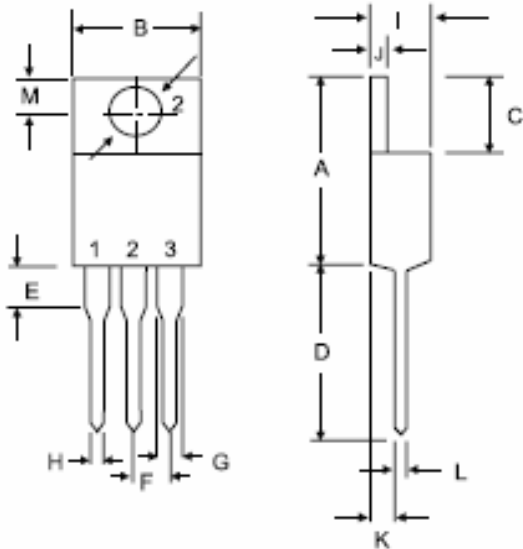

DIM	MILLMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	6.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.36
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90



How to contact us:

TO-220

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931