

TLP705

Plasma Display Panel.
Industrial Inverter
IGBT/Power MOS FET Gate Drive

TLP705 consists of a GaAlAs light emitting diode and a integrated photodetector.
This unit is 6-lead SDIP package. TLP705 is 50% smaller than 8pin DIP and has suited the safety standard reinforced insulation class.
So mounting area in safety standard required equipment can be reduced.
TLP705 is suitable for gate driving circuit of IGBT or power MOS FET.
Especially TLP705 is capable of "direct" gate drive of lower Power IGBTs.

- Peak output current : ± 0.45 A (max)
- Operating frequency : 250kHz (max)
- Guaranteed performance over temperature : -40 to 100°C
- Supply current : 3mA (max)
- Power supply voltage : 10 to 20 V
- Threshold input current : $I_{FLH} = 8$ mA (max)
- Switching time (t_{pLH} / t_{pHL}) : 200 ns (max)
- Common mode transient immunity : ± 10 kV/ μs (min)
- Isolation voltage : 5000 Vrms(min)
- UL Recognized : UL1577, File No.E67349
- Construction Mechanical Rating


	7.62-mm pitch standard type	10.16-mm pitch TLPXXXF type
Creepage Distance	7.0 mm (min)	8.0 mm (min)
Clearance	7.0 mm (min)	8.0 mm (min)
Insulation Thickness	0.4 mm (min)	0.4 mm (min)

- Option (D4)
TÜV approved : EN60747-5-2
Certificate No. R50033433
Maximum operating insulation voltage : 890 Vpk
Highest permissible over voltage : 8000 Vpk

(Note) When a EN60747-5-2 approved type is needed, please designate the "Option(D4)"


Truth Table

Input	LED	Tr1	Tr2	Output
H	ON	ON	OFF	H
L	OFF	OFF	ON	L

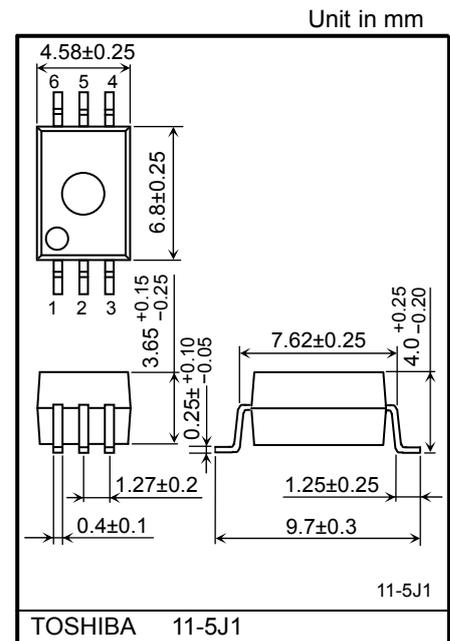


Weight: 0.26 g (typ.)

Pin Configuration (Top View)

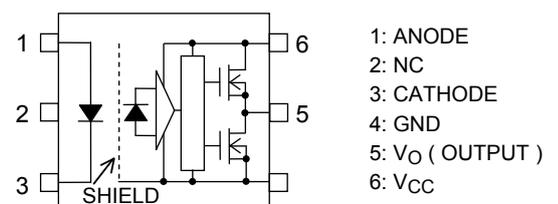

Schematic

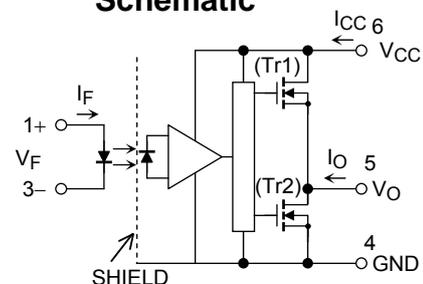

A 0.1 μF bypass capacitor must be connected between pins 6 and 4. (See Note 6.)

Absolute Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit
LED	Forward current	I _F	20	mA
	Forward current derating (Ta ≥ 85°C)	ΔI _F /ΔTa	-0.54	mA/°C
	Peak transient forward current (Note 1)	I _{FP}	1	A
	Reverse voltage	V _R	5	V
	Junction temperature	T _j	125	°C
Detector	"H" peak output current (Note 2)	I _{OPH}	-0.45	A
	"L" peak output current (Note 2)	I _{OPL}	0.45	A
	Output voltage	V _O	25	V
	Supply voltage	V _{CC}	25	V
	Junction temperature	T _j	125	°C
Operating frequency (Note 3)	f	250	kHz	
Storage temperature range	T _{stg}	-55 to 125	°C	
Operating temperature range	T _{opr}	-40 to 100	°C	
Lead soldering temperature (10 s) (Note 4)	T _{sol}	260	°C	
Isolation voltage (AC, 1 minute, R.H. ≤ 60%) (Note 5)	BV _S	5000	V _{rms}	

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Pulse width P_W ≤ 1μs, 300 pps

Note 2: Exponential waveform pulse width P_W ≤ 10 μs, f ≤ 15 kHz

Note 3: Exponential waveform I_{OPH} ≤ -0.25 A (≤ 80 ns), I_{OPL} ≤ +0.25 A (≤ 80 ns), Ta = 100 °C

Note 4: It is effective soldering area of Lead.

Note 5: Device considered a two terminal device: pins 1, 2 and 3 shorted together, and pins 4, 5 and 6 shorted together.

Note 6: A ceramic capacitor(0.1 μF) should be connected from pin 6 to pin 4 to stabilize the operation of the high gain linear amplifier. Failure to provide the bypassing may impair the switching property.
The total lead length between capacitor and coupler should not exceed 1 cm.

Recommended Operating Conditions

Characteristics	Symbol	Min	Typ.	Max	Unit
Input current, ON (Note 7)	I _F (ON)	10	—	15	mA
Input voltage, OFF	V _F (OFF)	0	—	0.8	V
Supply voltage	V _{CC}	10	—	20	V
Peak output current	I _{OPH} / I _{OPL}	—	—	± 0.15	A
Operating temperature	T _{opr}	-40	—	100	°C

Note: Recommended operating conditions are given as a design guideline to obtain expected performance of the device. Additionally, each item is an independent guideline respectively. In developing designs using this product, please confirm specified characteristics shown in this document.

Note 7: Input signal rise time (fall time) < 0.5 μs.

Note 8: If the rising slope of the supply voltage (V_{CC}) for the detector is steep, stable operation of the internal circuits cannot be guaranteed.

Be sure to set 3.0V/μs or less for a rising slope of the V_{CC}.

Electrical Characteristics (Ta = -40 to 100°C, unless otherwise specified)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.*	Max	Unit		
Forward voltage		V _F	—	I _F = 10 mA, Ta = 25°C	—	1.6	1.8	V		
Temperature coefficient of forward voltage		ΔV _F /ΔTa	—	I _F = 10 mA	—	-2.0	—	mV/°C		
Input reverse current		I _R	—	V _R = 5 V, Ta = 25°C	—	—	10	μA		
Input capacitance		C _T	—	V = 0 V, f = 1 MHz, Ta = 25°C	—	45	—	pF		
Output current (Note 9)	"H" Level	I _{OPH1}	1	V _{CC} = 15 V I _F = 10 mA	V ₆₋₅ = 4 V	-0.15	-0.35	A		
		I _{OPH2}			V ₆₋₅ = 10 V	-0.3	-0.6			
	"L" Level	I _{OPL1}	2	V _{CC} = 15 V I _F = 0 mA	V ₅₋₄ = 2 V	0.15	0.36			
		I _{OPL2}			V ₅₋₄ = 10 V	0.3	0.62			
Output voltage	"H" Level	V _{OH}	3	V _{CC} = 10 V	I _O = -100 mA, I _F = 10 mA	6.0	8.5	V		
	"L" Level	V _{OL}			4	I _O = 100 mA, V _F = 0.8 V	—		0.4	1.0
Supply current	"H" Level	I _{CCH}	5	V _{CC} = 10 to 20 V V _O open	I _F = 10 mA	—	2.0	mA		
	"L" Level	I _{CCL}			6	I _F = 0 mA	—		2.0	3.0
Threshold input current		L → H	I _{FLH}	—	V _{CC} = 15 V, V _O > 1 V		—	2.5	8	mA
Threshold input voltage		H → L	V _{FHL}	—	V _{CC} = 15 V, V _O < 1 V		0.8	—	—	V
Supply voltage		V _{CC}	—	—	10	—	20	V		

*: All typical values are at Ta = 25°C

Note 9: Duration of I_O time ≤ 50 μs

Note 10: This product is more sensitive than the conventional product to static electricity (ESD) because of a lowest power consumption design.

General precaution to static electricity (ESD) is necessary for handling this component.

Isolation Characteristics (Ta = 25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Capacitance input to output	C _S	V = 0 V, f = 1MHz (Note 5)	—	1.0	—	pF
Isolation resistance	R _S	R.H. ≤ 60%, V _S = 500V (Note 5)	1×10 ¹²	10 ¹⁴	—	Ω
Isolation voltage	BV _S	AC, 1 minute	5000	—	—	V _{rms}
		AC, 1 second, in oil	—	10000	—	
		DC, 1 minute, in oil	—	10000	—	V _{dc}


Switching Characteristics (Ta = -40 to 100°C, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.*	Max	Unit		
Propagation delay time	L → H	7	V _{CC} = 20 V R _g = 30 Ω C _g = 1 nF f = 250kHz Duty Cycle = 50%	Ta = 25°C I _F = 0 → 10 mA	70	95	170	ns	
	H → L			t _{pHL}	Ta = 25 °C I _F = 10 → 0 mA	70	105		170
Propagation delay time	L → H			t _{pLH}	Ta = -40 to 100°C I _F = 0 → 10 mA	50	—		200
	H → L			t _{pHL}	Ta = -40 to 100°C I _F = 10 → 0 mA	50	—		200
Propagation delay skew (Note 11)	tpsk				Ta = -40 to 100°C I _F = 10 mA	-90	—		90
Switching time dispersion between ON and OFF	t _{pHL} - t _{pLH}				Ta = -40 to 100°C I _F = 10 mA	-65	—		65
Output rise time (10-90%)	t _r				I _F = 0 → 10 mA	—	—		—
Output fall time (90-10%)	t _f				I _F = 10 → 0 mA	—	—		—
Common mode transient immunity at high level output	CM _H	8	V _{CM} = 1000Vp-p V _{CC} = 20 V Ta = 25°C	I _F = 10 mA V _O (min) = 16 V	-10000	—	—	V/μs	
Common mode transient immunity at low level output	CM _L			I _F = 0 mA V _O (max) = 1 V	10000	—	—		


*: All typical values are at Ta = 25°C

Note 11: Propagation delay difference between any two parts.


Test Circuit 1: I_{OPH}

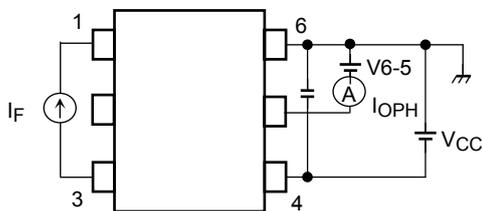


Test Circuit 2: I_{OPL}

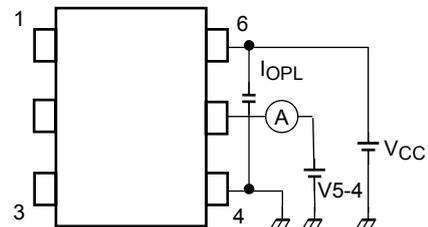


Test Circuit 3: V_{OH}

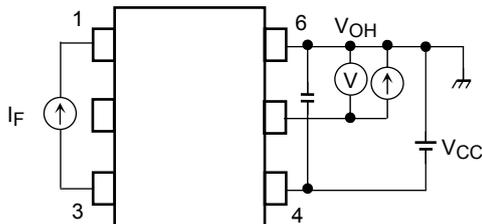


Test Circuit 4: V_{OL}

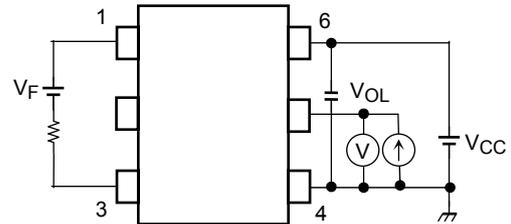



Test Circuit 5: I_{CCH}

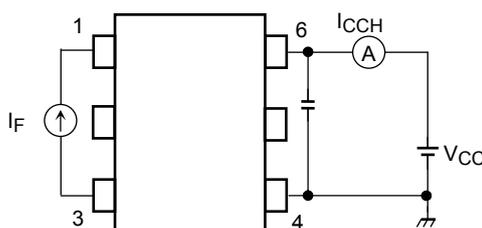



Test Circuit 6: I_{CCL}

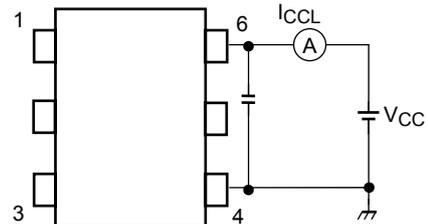

Test Circuit 7 : t_{pLH}, t_{pHL}, t_r, t_f, PWD

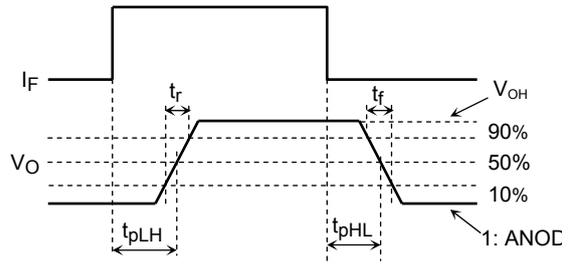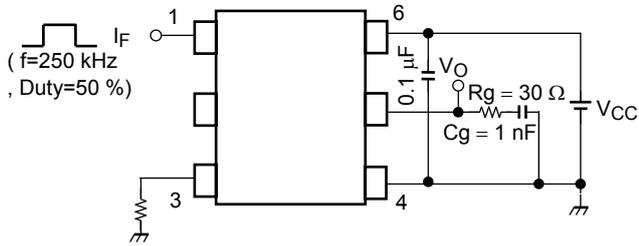

Test Circuit 8: C_{MH}, C_{ML}

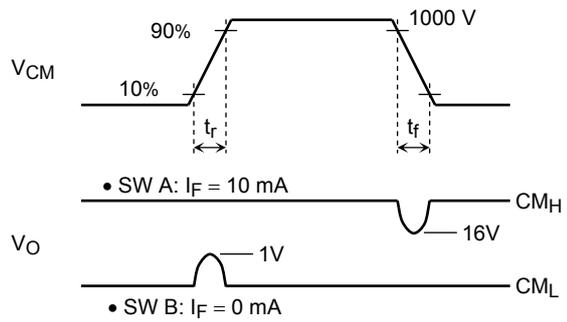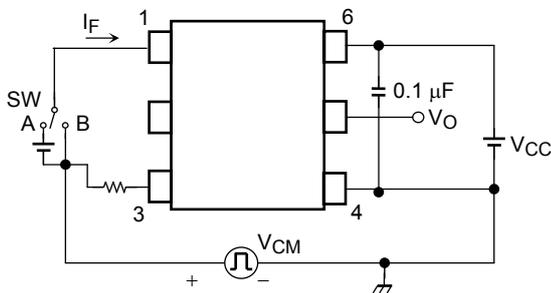

$$C_{ML} = \frac{800 \text{ V}}{t_f (\mu\text{s})}$$

$$C_{MH} = -\frac{800 \text{ V}}{t_f (\mu\text{s})}$$

C_{ML} (C_{MH}) is the maximum rate of rise (fall) of the common mode voltage that can be sustained with the output voltage in the low (high) state.

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before creating and producing designs and using, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application that Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- Product is intended for use in general electronics applications (e.g., computers, personal equipment, office equipment, measuring equipment, industrial robots and home electronics appliances) or for specific applications as expressly stated in this document. Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact ("Unintended Use"). Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for Unintended Use unless specifically permitted in this document.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.