

## 1 Scope

The present specifications shall apply to switching power supply IC SFA0001-VF-RP

## 2 Outline

|           |                                                                                                                                                            |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type      | Semiconductor IC (Monolithic IC)                                                                                                                           |
| Structure | Plastic package (Transfer mold)                                                                                                                            |
| Features  | Build-in current limit protection, thermal shutdown protection.<br>Built-in error-amp helps eliminate components at sensing stage such as shunt regulator. |

## 3 Absolute maximum ratings

## 3 - 1 Absolute maximum ratings (Ta=25°C)

| Parameter                           | Symbol     | Ratings       | Unit |
|-------------------------------------|------------|---------------|------|
| OCP terminal voltage                | VOCP       | -6~+6         | V    |
| SS terminal voltage                 | VSS        | -0.3~+9       | V    |
| FB terminal voltage                 | VFB        | -0.3~+6       | V    |
| Input voltage for control part      | VCC        | 0~36          | V    |
| Phase compensation terminal voltage | VCOMP      | -0.3~+6       | V    |
| Frequency setting terminal voltage  | VFREQ      | -0.3~+6       | V    |
| Drive terminal peak current         | IDRV(peak) | -540mA~+270mA | mA   |
| Drive terminal DC current           | IDRV(DC)   | -180mA~+90mA  | mA   |
| Power dissipation                   | PD         | 1.2 (※1)      | W    |
| Junction temperature                | Tj         | -40~150       | °C   |
| Storage temperature                 | Tstg       | -40~150       | °C   |

(※1) Mounted on glass epoxy board (The dimension of PCB : 42mm×32mm×1mm)

## 3 - 2 Recommended operating conditions

| Parameter                      | Symbol | Ratings | Unit |
|--------------------------------|--------|---------|------|
| Input voltage for control part | VCC    | 6~24    | V    |
| Switching frequency            | FOSC   | 20~200  | kHz  |

## 4 Electrical characteristic

## 4-1 Electrical characteristics (VCC=14V, Ta=-40~125°C) (\*1)


| Parameter                                  | Symbol      | Ratings |     |       | Unit | Conditions                                                  |
|--------------------------------------------|-------------|---------|-----|-------|------|-------------------------------------------------------------|
|                                            |             | MIN     | TYP | MAX   |      |                                                             |
| Power supply Start-up Operation            |             |         |     |       |      |                                                             |
| Operation start voltage                    | VCC(ON)     | 4.9     | 5.1 | 5.3   | V    | FB=0V, SS=0V, OCP=0V, FREQ=200pF<br>VCC=0V→14V              |
| Operation stop voltage                     | VCC(OFF)    | 4.4     | 4.6 | 4.8   | V    | FB=0V, SS=0V, OCP=0V, FREQ=200pF<br>VCC=14V→0V              |
| Circuit current in operation               | ICC(ON)     | 1.8     | 2.8 | 4     | mA   | FB=0V, SS=0V, OCP=0V, FREQ=200pF,<br>VCC=14V                |
| Circuit current in non-operation           | ICC(OFF)    | 0.3     | 0.6 | 1     | mA   | FB=0V, SS=0V, OCP=0V, FREQ=200pF,<br>VCC=4.8V               |
| Normal Operation                           |             |         |     |       |      |                                                             |
| SS terminal high threshold voltage         | VHSS        | 1.9     | 2   | 2.1   | V    | FB=0V, OCP=0V, FREQ=0V, VCC=14V,<br>SS=0V→2.5V              |
| SS terminal low threshold voltage          | VLSS        | 0.9     | 1   | 1.1   | V    | FB=0V, OCP=0V, FREQ=0V, VCC=14V,<br>SS=2.5V→0V              |
| SS terminal voltage hysteresis width       | Δ VSS       | 0.9     | 1   | 1.1   | V    | VHSS-VLSS                                                   |
| SS terminal outflow current                | Isrc(SS)    | 11      | 15  | 19    | μA   | FB=0V, OCP=0V, FREQ=0V, VCC=14V,<br>SS=0.9V                 |
| SS terminal inflow current                 | Isnk(SS)    | 13      | 17  | 21    | μA   | FB=0V, OCP=0V, FREQ=0V, VCC=14V,<br>SS=2.1V                 |
| Switching frequency                        | fosc(200p)  | 85      | 100 | 115   | kHz  | FB=0V, SS=0V, OCP=0V, FREQ=200pF,<br>VCC=14V                |
| FREQ terminal outflow current              | Isrc(FREQ)  | 27      | 30  | 33    | μA   | FB=0V, OCP=0V, SS=0V, VCC=14V,<br>FREQ=0.9V                 |
| FREQ terminal inflow current               | Isnk(FREQ)  | 75      | 86  | 95    | μA   | FB=0V, OCP=0V, SS=0V, VCC=14V,<br>FREQ=2.1V                 |
| Oscillation circuit high threshold voltage | VHF         | 1.9     | 2   | 2.1   | V    | FB=0V, OCP=0V, SS=0V, VCC=14V,<br>FREQ=0V→2.5V              |
| Oscillation circuit low threshold voltage  | VLF         | 0.9     | 1   | 1.1   | V    | FB=0V, OCP=0V, SS=0V, VCC=14V,<br>FREQ=2.5V→0V              |
| Maximum on-duty width                      | Dmax        | 70      | 73  | 78    | %    | FB=0V, SS=0V, OCP=0V, FREQ=200pF,<br>VCC=14V                |
| Slope compensation rate                    | SLP         | 2.1     | 2.5 | 2.9   | mV/% | FB=0V, SS=2.5V, COMP=1.3V,<br>FREQ=470p, VCC=14V, OCP=0V→1V |
| Feedback voltage                           | VFB         | 2.45    | 2.5 | 2.55  | V    | SS=0V, OCP=0V, FREQ=0V, VCC=14V<br>FB=0V→2.5V               |
| Drive voltage                              | Vdrive      | 7.6     | 8.3 | 9     | V    | FB=0V, OCP=0V, SS=0V, VCC=14V<br>FREQ=3V・1pulse             |
| Minimam drive voltage                      | Vdrive(min) | 4       |     |       | V    | FB=0V, OCP=0V, SS=0V, VCC≥6V<br>FREQ=3V・1pulse              |
| Minimum on-time                            | Ton(min)    |         | 400 |       | ns   | FB=3V, SS=0V, OCP=1V, FREQ=200pF,<br>VCC=14V                |
| Protection Operation                       |             |         |     |       |      |                                                             |
| Leading edge blanking time                 | Tbw         | (70)    | 100 | (150) | ns   | (※2)                                                        |
| OCP threshold voltage                      | VOCP        | 0.46    | 0.5 | 0.54  | V    | FB=0V, SS=0V, VCC=14V<br>FREQ=3V・1pulse, OCP=0V→1V          |
| OLP delay time                             | TOLP        | 32      | 42  | 52    | ms   | FB=0V, OCP=0V, SS=10nF, VCC=14V<br>FREQ=3V・1pulse           |
| Drive stop threshold voltage               | VST         | 3.5     | 4   | 4.5   | V    | FB=0V, OCP=0V, VCC=14V<br>FREQ=3V・1pulse, SS=0V→5V          |
| Thermal shutdown operating temperature     | TiH (TSD)   | 150     | 165 |       | ℃    | (※2)                                                        |
| Thermal shutdown release temperature       | TiL (TSD)   |         | 150 |       | ℃    | (※2)                                                        |

\*1 The ratings at Ta=-40°C to 125°C shall be treated as a design value.


The ratings of devices shall be checked at -30°C, 25°C, 125°C at Outgoing Inspection.

\*2 The rating of devices shall be treated as a design value.


## 4-2 Typical characteristics(Ta=25°C)

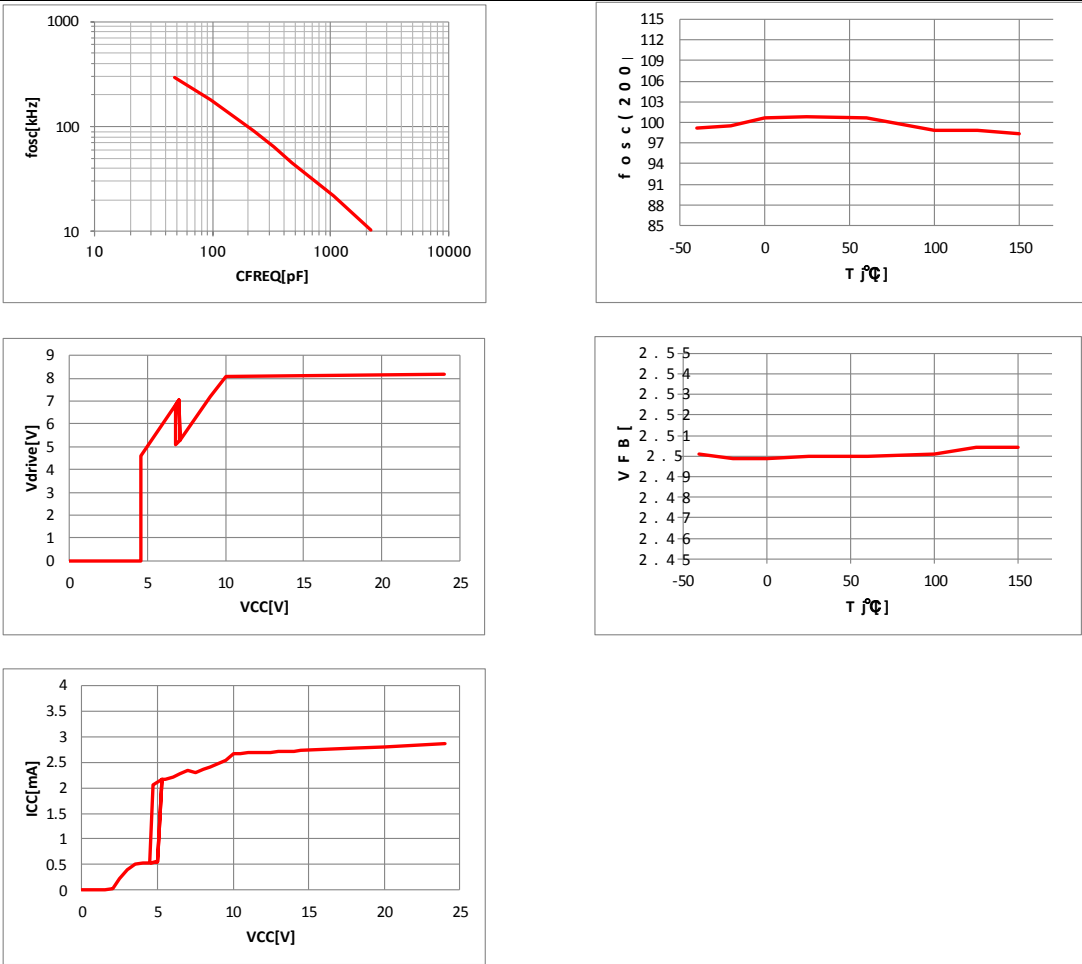

5 Block diagram

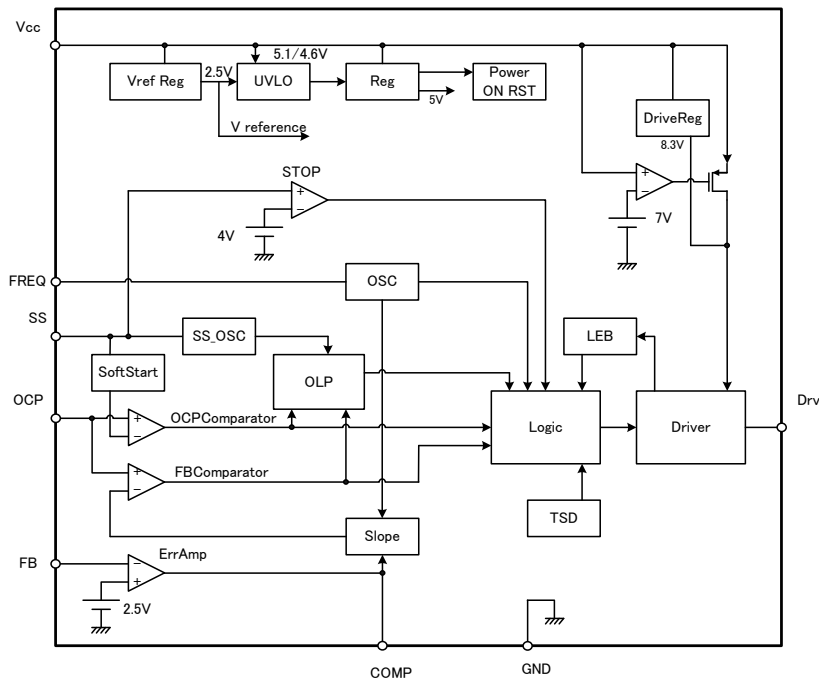

6 Standard connection

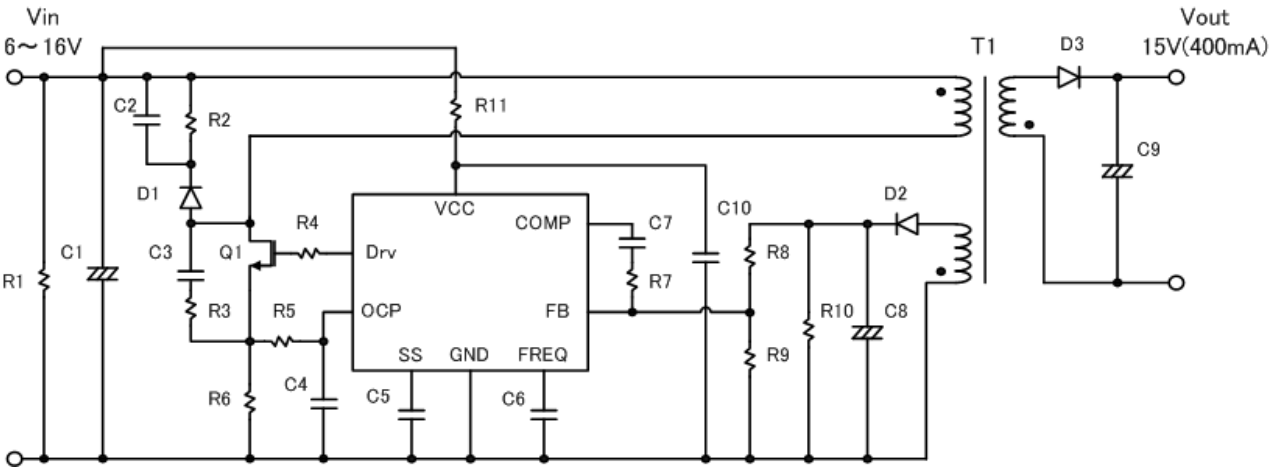


※Since the switching noise caused by Q1 may affect the operation of an IC ,appropriate design for peripheral circuits is required to prevent the malfunction of an IC by adding snubber circuit and /or filter circuit.

7 Pins function description


| Terminal No | symbols | Descripton                       |
|-------------|---------|----------------------------------|
| 1           | VCC     | Power supply terminal            |
| 2           | FB      | Feedback terminal                |
| 3           | GND     | Ground terminal                  |
| 4           | SS      | Soft start terminal              |
| 5           | FREQ    | Frequency setting terminal       |
| 6           | COMP    | Phase compensation terminal      |
| 7           | Drive   | Gate drive terminal              |
| 8           | OCP     | Over current protection terminal |

## 8 Timing diagram

## 8-1 Timing diagram in standard connection

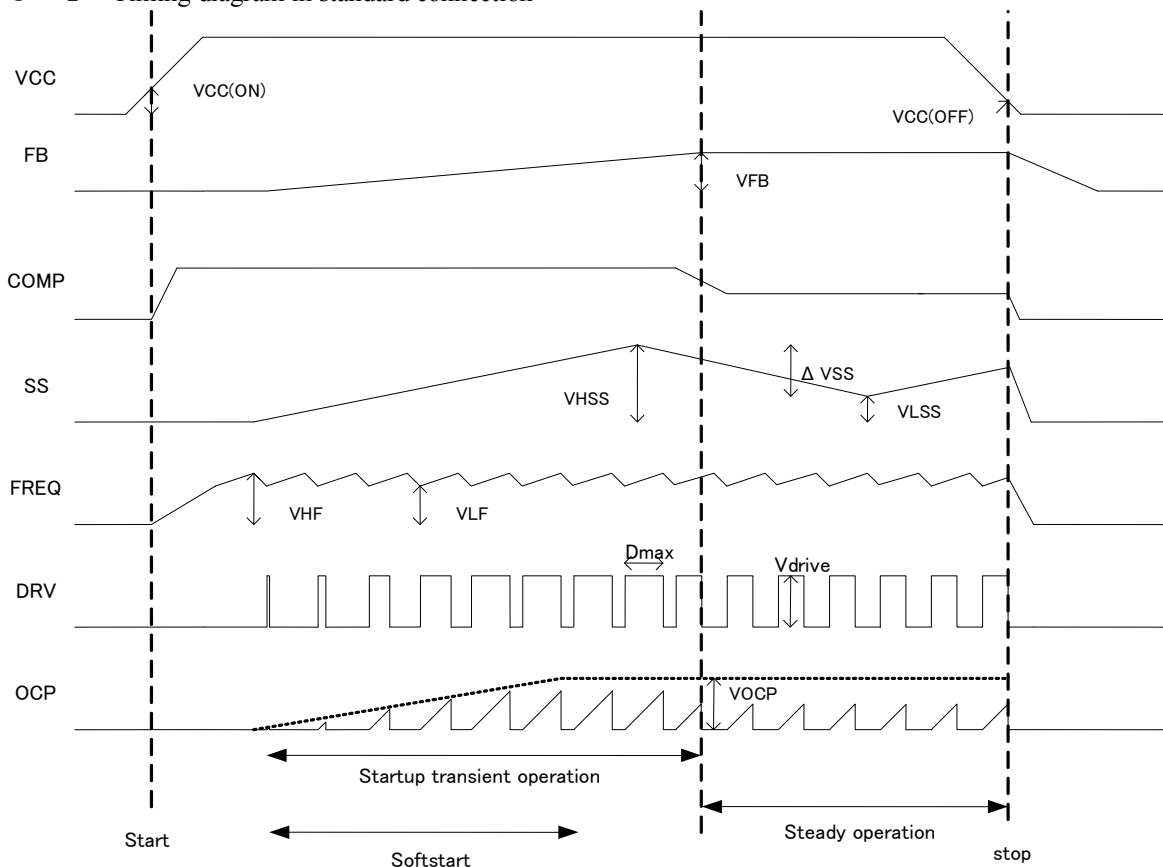


## 8-2 Timing diagram in protection

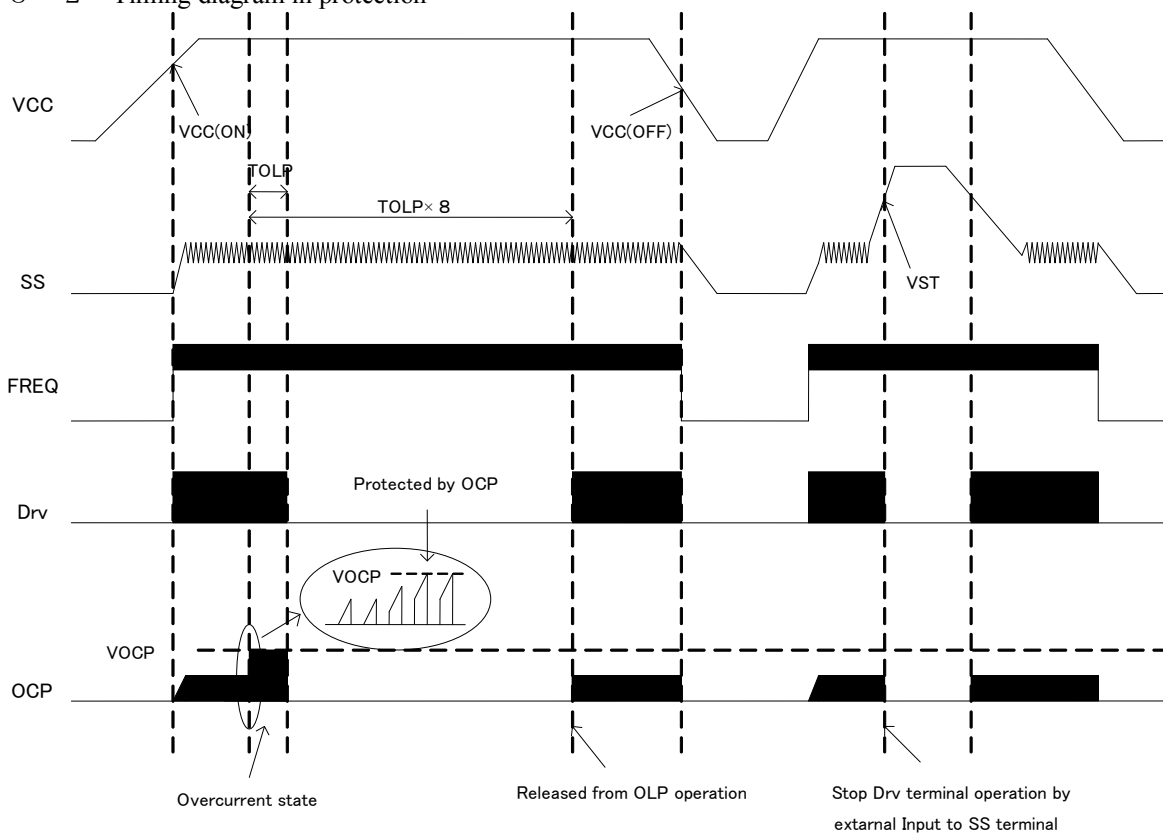

9 Package information

9 – 1 Package type, physical dimensions and material

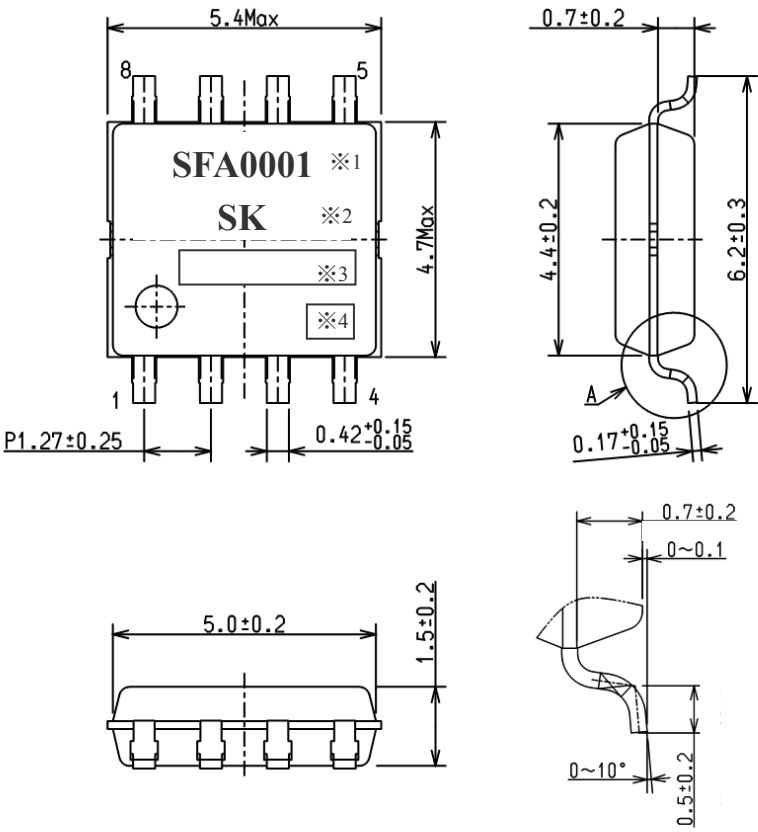

- ※1 : Part Number
- ※2 : Logo Mark
- ※3 : Lot Number
  - 1<sup>st</sup> letter : The Last digit of year
  - 2<sup>nd</sup> letter : Month
    - (1 to 9 Jan. to Sept., O for Oct. N for Nov. D for Dec.)
  - 3<sup>rd</sup> & 4<sup>th</sup> letter : day
    - 01~31 Arabic Numeral
- ※4 : Administer number

Lead is solder-plated  
(except cutting surface of lead)

Zoom of A part

Dimensions in mm

| Terminal No | symbol | Description                      |
|-------------|--------|----------------------------------|
| 1           | VCC    | Power supply terminal            |
| 2           | FB     | Feedback terminal                |
| 3           | GND    | Ground terminal                  |
| 4           | SS     | Soft start terminal              |
| 5           | FREQ   | Frequency setting terminal       |
| 6           | COMP   | Phase compensation terminal      |
| 7           | Drive  | Gate drive terminal              |
| 8           | QCP    | Over current protection terminal |


9 – 2 Appearance

The body shall be clean and shall not bear any stain, rust or flaw.

9 – 3 Marking

The type number and lot number shall be legitimately marked in order not to be erased easily.

The example of the solder pattern

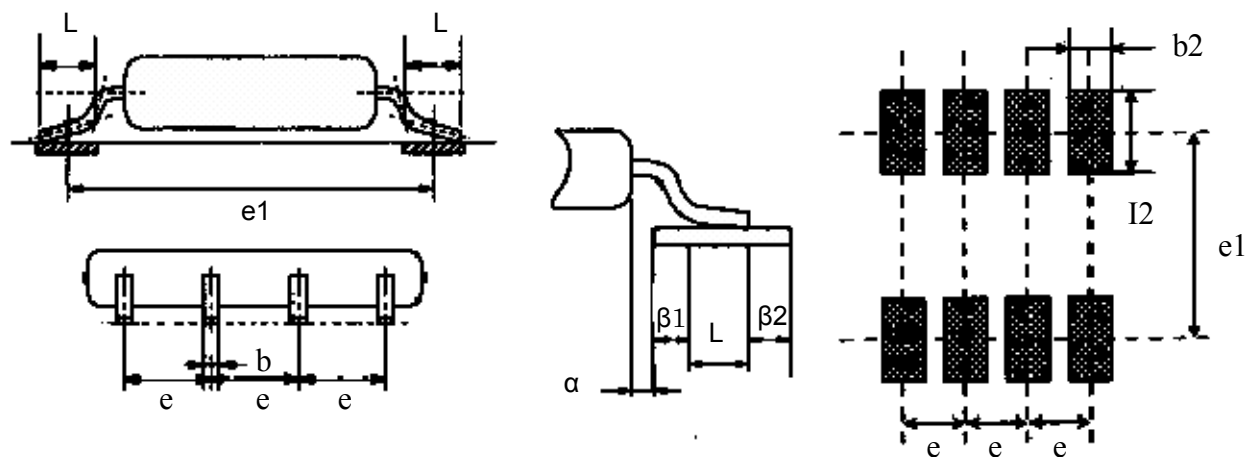

| Symbol    | Dimensions(mm)      |
|-----------|---------------------|
| e1        | 5.72                |
| e         | 1.27                |
| $\alpha$  | 0.2 or more         |
| $\beta 1$ | 0.2~0.5             |
| $\beta 2$ | 0.2                 |
| L         | 0.6                 |
| b         | 0.42                |
| b2        | 0.76                |
| I2        | $L+\beta 1+\beta 2$ |

There are reference value that are according with the EIAJ standards. (ED-7402-1)

## SOP8 Taping specifications for packing

## 1. Outline

This specification specifies packaging spec. for Sanken electric co., SFA0001-VF-RP as well as its related matters. Shipping is only taping as to SOP8.

## 2. Part name indication

This followings specifies part name for taping spec.

## 2.1 Part name indication method

“Part name” - VF

## 2.2 IC direction in carrier tape pocket

SFA0001-VF-RP is [VF type].


End of “Part name” is [- VB]: 1 pin of IC is facing to tape roll-in direction.

End of “Part name” is [- VF]: 1 pin of IC is facing to tape pull-out direction.

### 3. Embossed taping specifications

### 3.1 Taping type and physical dimensions

This carrier tape is treated antistatic treatment.

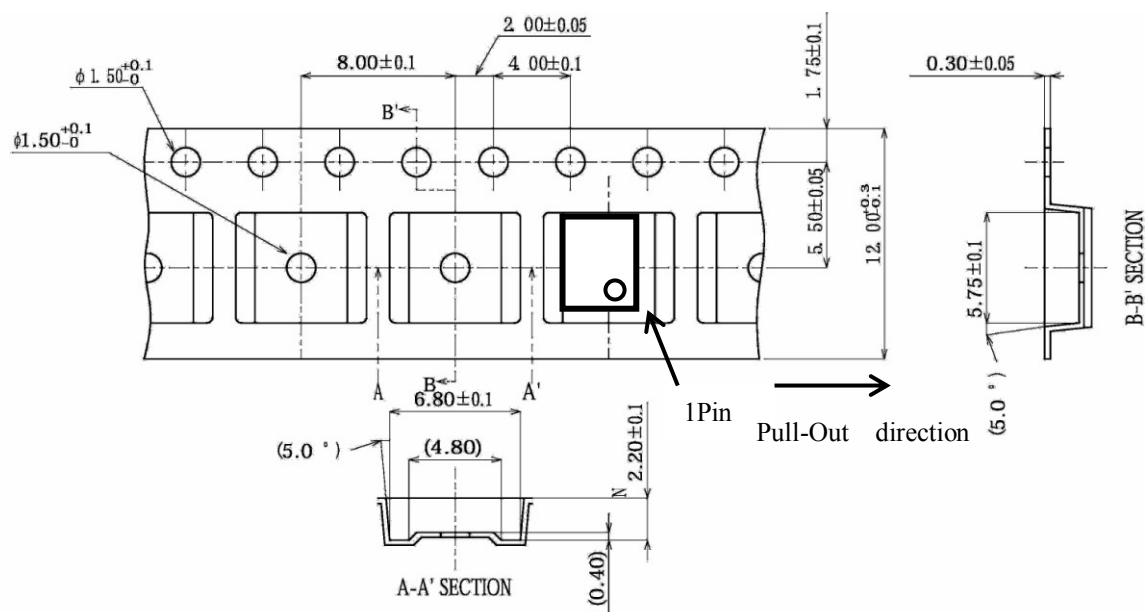


Material: Emboss

### Note

- 1) The radius (R) is 0.3mm max
- 2) Cumulative tolerance of 10 pitches of the sprocket hole is  $\pm 0.2\text{mm}$



3.2 Reeling type and physical dimensions  
This reel is made of plastic with antistatic treatment.

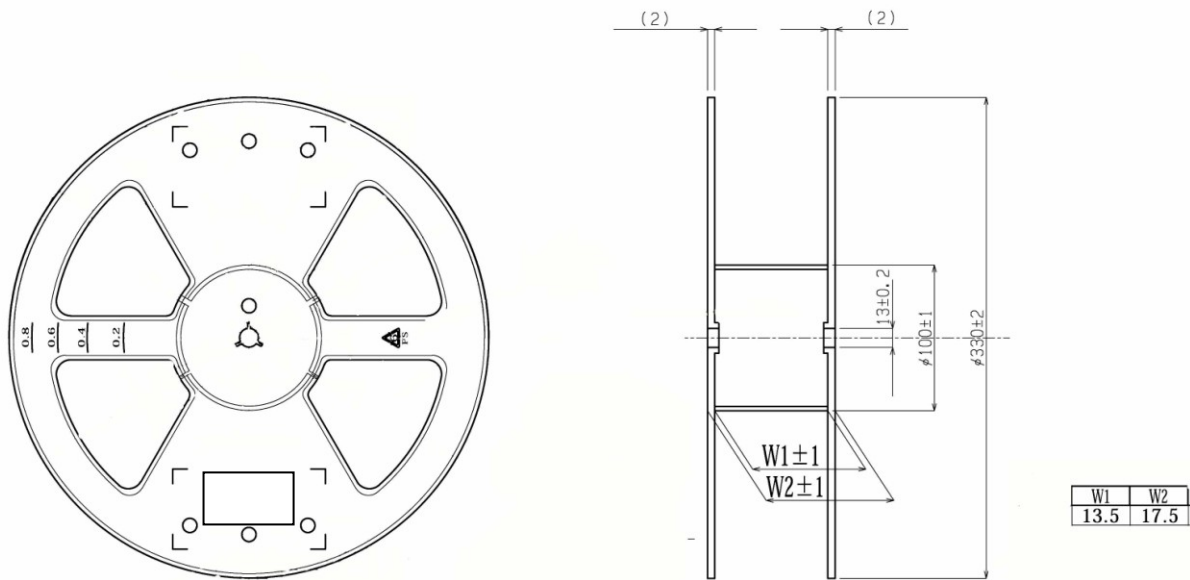


A label shall be put on a side of flange. A label has part number including a direction for unreeling, quantity, and lot number.

Note  
Reel Material : Plastic

Label content

|                         |           |
|-------------------------|-----------|
| NAME                    |           |
| LOT<br>No.              |           |
| AMOUNT                  | P · C · S |
| SANKEN ELECTRIC CO.,LTD |           |


3.3 Reeling specifications (Leader/Trail)

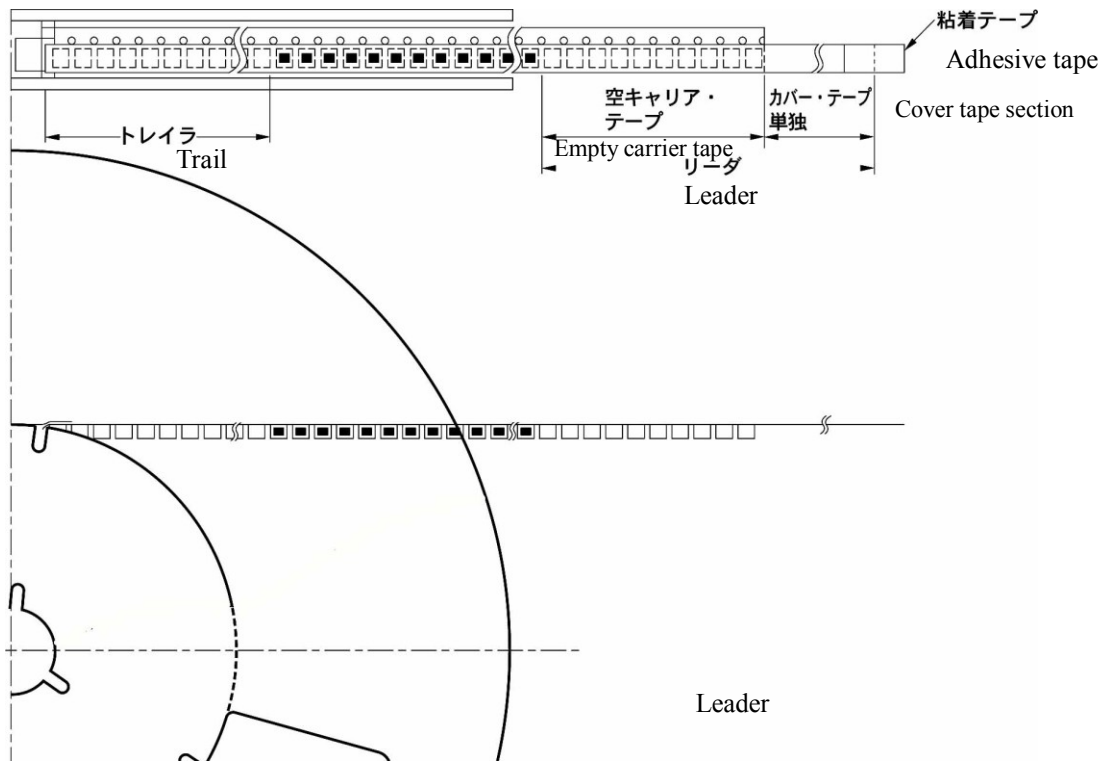

|                    |     |       |  |
|--------------------|-----|-------|--|
| Leader             |     |       |  |
| Cover tape section | MIN | 100mm |  |
| Empty carrier tape | MIN | 320mm |  |
| Leader Section     | MIN | 420mm |  |
| Trail              |     |       |  |
| Empty carrier tape | MIN | 80mm  |  |

3.4 Strength of taping seal

Detachment Strength of cover tape 0.1~1.0N  
Tear away angle: 165~180° Detachment speed: 300±10mm/min

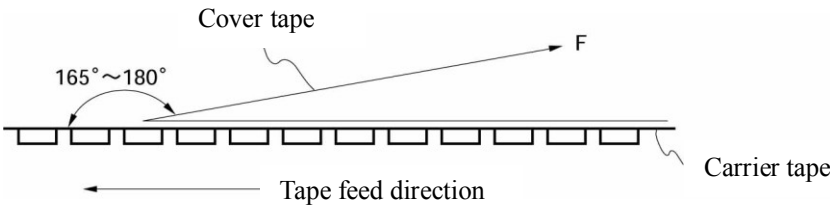

3.5 Missed parts on tape

The number of missed parts cannot exceed 0.2% of total parts on the tape. Also, missing of sequential parts must not happen.

## 4. Packaging

4.1 The number of parts per a reel: 3000 parts (MAX)

4.2 Indication of part name and quantity


A label shows part number, quantity, and lot number.

4.3 Outer packaging of reel


Reel is put into moisture barrier bag and seal with desiccant and put into outer box.

## 5. Packing Dimensions and Appearance (A box is made of card boards.

The following dimensions are reference value.)

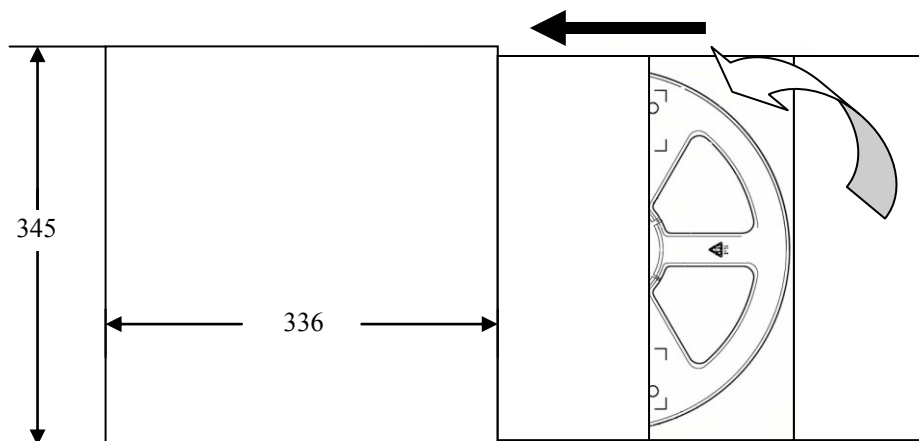

Dimensions of a box: H336mm x V345mm x T 40mm

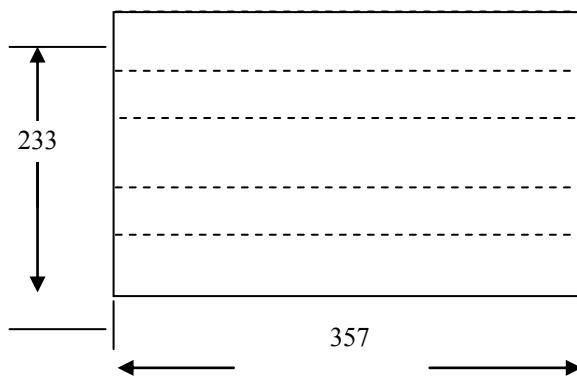

Size of a box contains 5 small boxes: 357mm x 357x 233mm

## 6. Storage

In order to avoid failures during picking and mounting of devices by degradation of taping peel strength and to maintain mounting quality, the box shall be stored under temperature +5~+40 degree C and humidity 40%~60%. Parts shall be used within 3 months from the shipping date with unpacked state.

After unpacking the bag, the parts shall be stored under temperature 30°C and humidity 60% and used within 168hrs.

Moisture sensitivity level (MSL): Level 3

## CAUTION/ WARNING

- Application and operation examples described in this document are quoted for the sole purpose of reference for the use of the products herein and Sanken can assume no responsibility for any infringement of industrial property rights, intellectual property rights or any other rights of Sanken or any third party which may result from its use.
- Although Sanken undertakes to enhance the quality and reliability of its products, the occurrence of failure and defect of semiconductor products at a certain rate is inevitable. Users of Sanken products are requested to take, at their own risk, preventative measures including safety design of the equipment or systems against any possible injury, death, fires or damages to the society due to device failure or malfunction.
- Sanken products listed in this document are designed and intended for the use as components in general purpose electronic equipment or apparatus (home appliances, office equipment, telecommunication equipment, measuring equipment, etc.). Please return to us this document with your signature(s) or seal(s) prior to the use of the products herein.  
When considering the use of Sanken products in the applications where higher reliability is required (transportation equipment and its control systems, traffic signal control systems or equipment, fire/crime alarm systems, various safety devices, etc.), please contact your nearest Sanken sales representative to discuss, and then return to us this document with your signature(s) or seal(s) prior to the use of the products herein.  
The use of Sanken products without the written consent of Sanken in the applications where extremely high reliability is required (aerospace equipment, nuclear power control systems, life support systems, etc.) is strictly prohibited.
- In the case that you use our semiconductor devices or design your products by using our semiconductor devices, the reliability largely depends on the degree of derating to be made to the rated values. Derating may be interpreted as a case that an operation range is set by derating the load from each rated value or surge voltage or noise is considered for derating in order to assure or improve the reliability. In general, derating factors include electric stresses such as electric voltage, electric current, electric power etc., environmental stresses such as ambient temperature, humidity etc. and thermal stress caused due to self-heating of semiconductor devices. For these stresses, instantaneous values, maximum values and minimum values must be taken into consideration.  
In addition, it should be noted that since power devices or IC's including power devices have large self-heating value, the degree of derating of junction temperature ( $T_j$ ) affects the reliability significantly.
- When using the products specified herein by either (i) combining other products or materials therewith or (ii) physically, chemically or otherwise processing or treating the products, please duly consider all possible risks that may result from all such uses in advance and proceed therewith at your own responsibility.
- Anti radioactive ray design is not considered for the products listed herein.
- Sanken assumes no responsibility for any troubles, such as dropping products caused during transportation out of Sanken's distribution network.