


Features

- ◆ Single-in-line (SIP) package
- ◆ Single and dual output models
- ◆ I/O isolation 1'000 VDC
- ◆ Unregulated device
- ◆ High efficiency up to 81%
- ◆ Operating temp. range -40°C to $+85^{\circ}\text{C}$
- ◆ Industry standard pinout
- ◆ 100% Burn-in (8 h)
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty



The TMA series are miniature, isolated 1 W DC/DC-converters in a Single-in-Line package (SIP). Requiring only 1.2 cm² board space they offer the ideal solution in many space critical applications for board level power distribution. The use of SMD-technology makes it possible to offer a product with high performance at low cost.

Models

Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMA 0505S	5 VDC \pm 10%	5 VDC	200 mA	71 %
TMA 0512S		12 VDC	84 mA	78 %
TMA 0515S		15 VDC	67 mA	78 %
TMA 0505D		\pm 5 VDC	\pm 100 mA	72 %
TMA 0512D		\pm 12 VDC	\pm 42 mA	78 %
TMA 0515D		\pm 15 VDC	\pm 34 mA	79 %
TMA 1205S	12 VDC \pm 10%	5 VDC	200 mA	73 %
TMA 1212S		12 VDC	84 mA	80 %
TMA 1215S		15 VDC	67 mA	80 %
TMA 1205D		\pm 5 VDC	\pm 100 mA	74 %
TMA 1212D		\pm 12 VDC	\pm 42 mA	81 %
TMA 1215D		\pm 15 VDC	\pm 34 mA	81 %
TMA 1505S	15 VDC \pm 10%	5 VDC	200 mA	72 %
TMA 1512S		12 VDC	84 mA	79 %
TMA 1515S		15 VDC	67 mA	79 %
TMA 1505D		\pm 5 VDC	\pm 100 mA	72 %
TMA 1512D		\pm 12 VDC	\pm 42 mA	80 %
TMA 1515D		\pm 15 VDC	\pm 34 mA	80 %
TMA 2405S	24 VDC \pm 10%	5 VDC	200 mA	71 %
TMA 2412S		12 VDC	84 mA	78 %
TMA 2415S		15 VDC	67 mA	79 %
TMA 2405D		\pm 5 VDC	\pm 100 mA	72 %
TMA 2412D		\pm 12 VDC	\pm 42 mA	79 %
TMA 2415D		\pm 15 VDC	\pm 34 mA	80 %

Input Specifications

Input current no load /full load	5 Vin models: 30 mA / 270 mA typ. 12 Vin models: 12 mA / 110 mA typ. 15 Vin models: 11 mA / 90 mA typ. 24 Vin models: 7 mA / 55 mA typ.
Surge voltage (1 s max.)	5 Vin models: 9 V max. 12 Vin models: 18 V max. 15 Vin models: 18 V max. 24 Vin models: 30 V max.
Reverse polarity input current	0.3 A max.
Reflected input ripple current	can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter	internal capacitors

Output Specifications

Voltage set accuracy	±1 % typ. / ±3 % max.
Voltage balance (dual output models, balanced loads)	±0.1 % typ. / ±1 % max.
Regulation	– Input variation (1 % change Vin) 1.2 % typ. / 1.5 % max. – Load variation (20 – 100 %) 5 to 10 % max. (depending on model)
Ripple and noise (20 MHz Bandwidth)	50 mVp-p typ. / 75 mVp-p max.
Temperature coefficient	±0.01 %/K typ. / ±0.02 %/K max.
Short circuit protection	limited 0.5 s max.
Capacitive load	Single output models: 220 µF max. Dual output models: 100 µF max.

General Specifications

Temperature ranges	– Operating –40°C to +85°C – Case temperature +90°C max. – Storage –50°C to +125°C
Derating	3.3, 5 and ±5 VDC output models: 4 %/K above 75°C all other output models: 4 %/K above 80°C
Humidity (non condensing)	95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)	>2'000'000 h
Isolation Test Voltage (Input/Output, 60s)	1'000 VDC
Insulation System	Functional
Isolation Capacitance (Input/Output)	60 pF typ. / 100 pF max.
Isolation Resistance (Input/Output)	>1'000 MOhm
Switching Frequency	70 to 120 kHz (frequency modulation)
Environmental Compliance	– Reach www.tracopower.com/products/reach-declaration.pdf – RoHS RoHS directive 2011/65/EU


Supporting documents: www.tracopower.com/overview/tma

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	non conductive black plastic (UL 94V-0 rated)	
Package weight	5 & 12 Vin models: 2.2 g (0.07 oz)	15 % 24 Vin models: 2.6 g (0.09 oz)
Potting material	Epoxy	
Soldering temperature	max. 260°C / 10 s	

Outline Dimensions mm (inches)

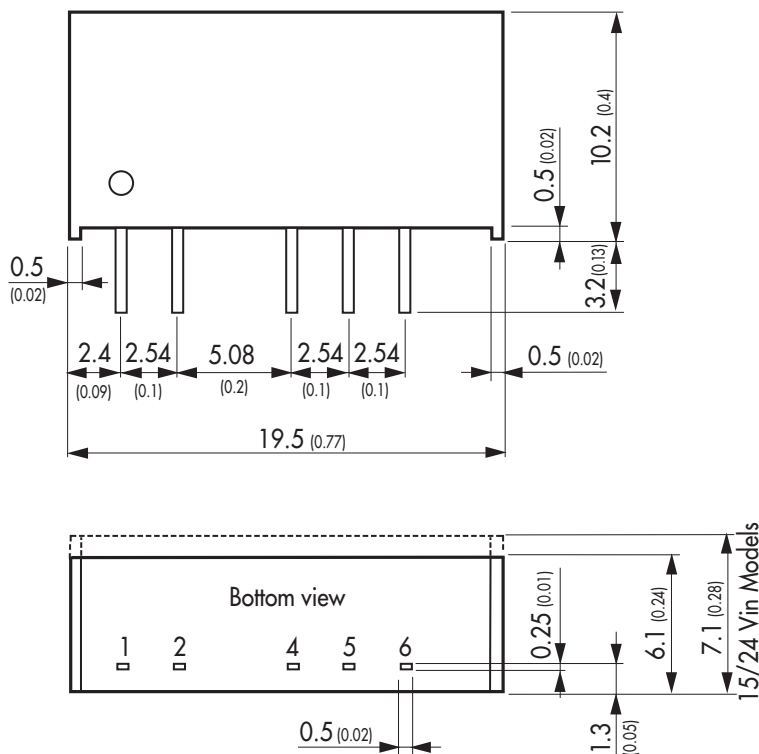

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
4	-Vout	-Vout
5	No pin	Common
6	+Vout	+Vout

Tolerances ± 0.25 (± 0.01)
Pin pitch tolerances ± 0.13 (± 0.005)
pins ± 0.05 (± 0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TMA 1505S](#) [TMA 2405D](#) [TMA 1215D](#) [TMA 1515S](#) [TMA 0505S](#) [TMA 2412D](#) [TMA 2405S](#) [TMA 0515S](#) [TMA 0505D](#)
[TMA 1512D](#) [TMA 1212D](#) [TMA 1505D](#) [TMA 0512S](#) [TMA 2415S](#) [TMA 2412S](#) [TMA 2415D](#) [TMA 1205D](#) [TMA 0512D](#)
[TMA 1205S](#) [TMA 0515D](#) [TMA 1212S](#) [TMA 1515D](#) [TMA 1215S](#) [TMA 1512S](#)