

# isc Silicon NPN Darlington Power Transistor

# BDX63/A/B/C

### DESCRIPTION

- Collector Current  $I_C = 8A$
- High DC Current Gain  $h_{FE} = 1000(\text{Min}) @ I_C = 3A$
- Complement to Type BDX62/A/B/C
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

### APPLICATIONS



- Designed for audio output stages and general amplifier and switching applications

### ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT	
$V_{CBO}$	Collector-Base Voltage	BDX63	80	V
		BDX63A	100	
		BDX63B	120	
		BDX63C	140	
$V_{CEO}$	Collector-Emitter Voltage	BDX63	60	V
		BDX63A	80	
		BDX63B	100	
		BDX63C	120	
$V_{EBO}$	Emitter-Base Voltage	5	V	
$I_C$	Collector Current-Continuous	8	A	
$I_{CM}$	Collector Current-Peak	12	A	
$I_B$	Base Current-Continuous	0.15	A	
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	90	W	
$T_J$	Junction Temperature	200	$^\circ\text{C}$	
$T_{stg}$	Storage Temperature Range	-65~200	$^\circ\text{C}$	

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.94	$^\circ\text{C/W}$

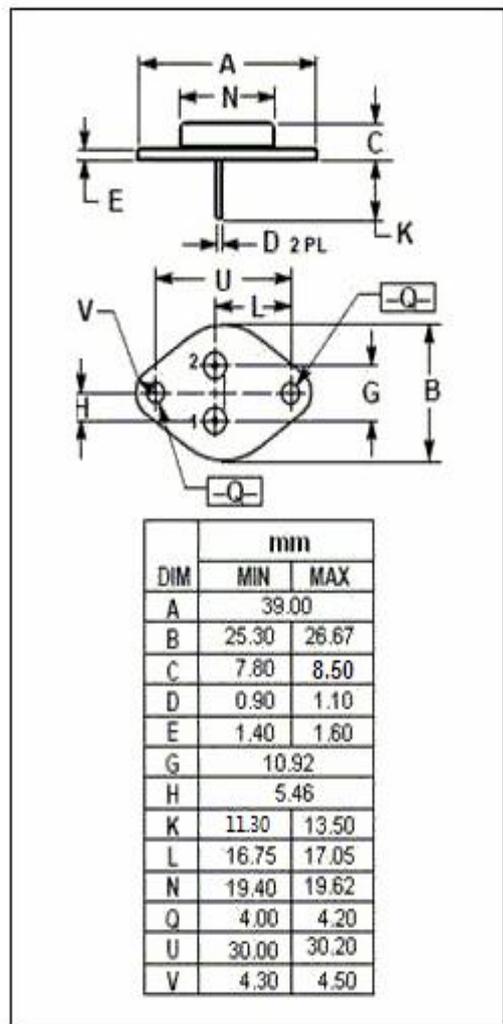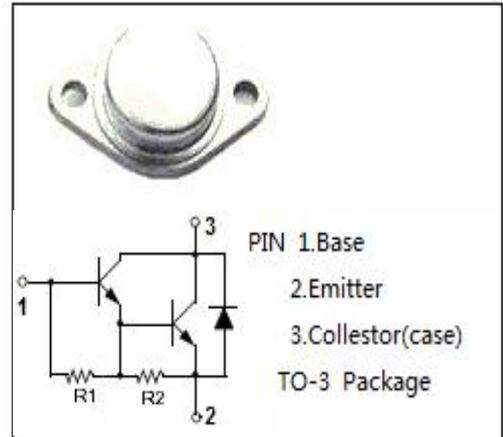

**isc Silicon NPN Darlington Power Transistor**
**BDX63/A/B/C**
**ELECTRICAL CHARACTERISTICS**

 T<sub>C</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
V <sub>CEO(SUS)</sub>	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = 50mA ; I <sub>B</sub> =0	BDX63	60			V
			BDX63A	80			
			BDX63B	100			
			BDX63C	120			
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 3A; I <sub>B</sub> = 12mA			2	V	
V <sub>BE(on)</sub>	Base-Emitter On Voltage	I <sub>C</sub> = 3A ; V <sub>CE</sub> = 3V			2.5	V	
V <sub>ECF</sub>	C-E Diode Forward Voltage	I <sub>F</sub> = 3A		1.2		V	
I <sub>CEO</sub>	Collector Cutoff Current	V <sub>CE</sub> = 1/2 V <sub>CEOmax</sub> ; I <sub>B</sub> = 0			0.2	mA	
I <sub>CBO</sub>	Collector Cutoff Current	V <sub>CB</sub> = V <sub>CEOmax</sub> ; I <sub>E</sub> = 0 V <sub>CB</sub> = 1/2 V <sub>CB0max</sub> ; I <sub>E</sub> = 0; T <sub>J</sub> = 200°C			0.2 2	mA	
I <sub>EBO</sub>	Emitter Cutoff Current	V <sub>EB</sub> = 5V; I <sub>C</sub> =0			5	mA	
h <sub>FE-1</sub>	DC Current Gain	I <sub>C</sub> = 0.5A ; V <sub>CE</sub> = 3V		2500			
h <sub>FE-2</sub>	DC Current Gain	I <sub>C</sub> = 3A ; V <sub>CE</sub> = 3V	1000				
h <sub>FE-3</sub>	DC Current Gain	I <sub>C</sub> = 8A ; V <sub>CE</sub> = 3V		2600			
C <sub>OB</sub>	Output Capacitance	I <sub>E</sub> = 0 ; V <sub>CB</sub> = 10V; f <sub>test</sub> = 1MHz		100		pF	
Switching times							
t <sub>on</sub>	Turn-on Time	I <sub>C</sub> = 3A; I <sub>B1</sub> = -I <sub>B2</sub> = 12mA		0.5		μ s	
t <sub>off</sub>	Turn-off Time			5		μ s	

**NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.