

UN5111/5112/5113/5114/5115/5116/5117/5118/5119/5110/ 511D/511E/511F/511H/511L/511M/511N/511T/511V/511Z

Silicon PNP epitaxial planer transistor

For digital circuits

Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- S-Mini type package, allowing automatic insertion through tape packing and magazine packing.

Resistance by Part Number


	Marking Symbol	(R ₁)	(R ₂)
• UN5111	6A	10kΩ	10kΩ
• UN5112	6B	22kΩ	22kΩ
• UN5113	6C	47kΩ	47kΩ
• UN5114	6D	10kΩ	47kΩ
• UN5115	6E	10kΩ	—
• UN5116	6F	4.7kΩ	—
• UN5117	6H	22kΩ	—
• UN5118	6I	0.51kΩ	5.1kΩ
• UN5119	6K	1kΩ	10kΩ
• UN5110	6L	47kΩ	—
• UN511D	6M	47kΩ	10kΩ
• UN511E	6N	47kΩ	22kΩ
• UN511F	6O	4.7kΩ	10kΩ
• UN511H	6P	2.2kΩ	10kΩ
• UN511L	6Q	4.7kΩ	4.7kΩ
• UN511M	EI	2.2kΩ	47kΩ
• UN511N	EW	4.7kΩ	47kΩ
• UN511T	EY	22kΩ	47kΩ
• UN511V	FC	2.2kΩ	2.2kΩ
• UN511Z	FE	4.7kΩ	22kΩ

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V _{CBO}	-50	V
Collector to emitter voltage	V _{CEO}	-50	V
Collector current	I _C	-100	mA
Total power dissipation	P _T	150	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

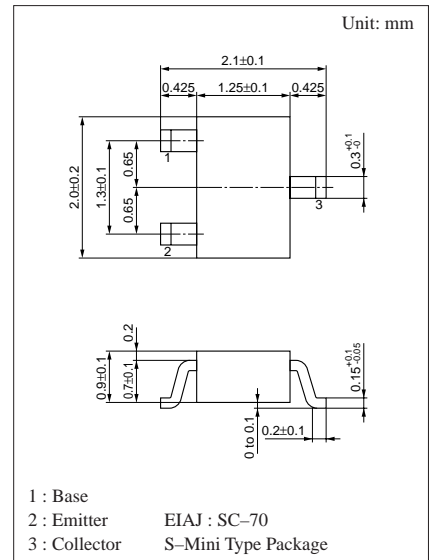

Internal Connection

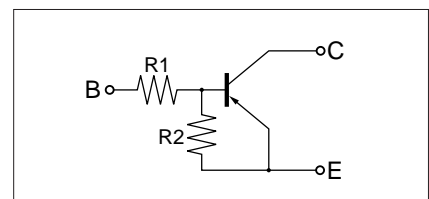

Electrical Characteristics ($T_a=25^\circ\text{C}$)

Parameter		Symbol	Conditions	min	typ	max	Unit	
Collector cutoff current		I_{CBO}	$V_{CB} = -50\text{V}, I_E = 0$			-0.1	μA	
		I_{CEO}	$V_{CE} = -50\text{V}, I_B = 0$			-0.5	μA	
Emitter cutoff current	UN5111	I_{EBO}	$V_{EB} = -6\text{V}, I_C = 0$			-0.5	mA	
	UN5112/5114/511E/511D/511M/511N/511T					-0.2		
	UN5113					-0.1		
	UN5115/5116/5117/5110					-0.01		
	UN511F/511H					-1.0		
	UN5119					-1.5		
	UN5118/511L/511V					-2.0		
	UN511Z					-0.4		
Collector to base voltage		V_{CBO}	$I_C = -10\mu\text{A}, I_E = 0$	-50			V	
UN511N/511T/511V/511Z				-50				
Collector to emitter voltage		V_{CEO}	$I_C = -2\text{mA}, I_B = 0$	-50			V	
UN511N/511T				-50				
Forward current transfer ratio	UN5111	h_{FE}	$V_{CE} = -10\text{V}, I_C = -5\text{mA}$	35				
	UN5112/511E			60				
	UN5113/5114/511M			80				
	UN5115*/5116*/5117*/5110*			160		460		
	UN511F/511D/5119/511H			30				
	UN5118/511L			20				
	UN511N/511T			80		400		
	UN511V			6		20		
	UN511Z			60		200		
Collector to emitter saturation voltage		$V_{CE(sat)}$	$I_C = -10\text{mA}, I_B = -0.3\text{mA}$			-0.25	V	
UN511V				$I_C = -10\text{mA}, I_B = -1.5\text{mA}$				-0.25
Output voltage high level		V_{OH}	$V_{CC} = -5\text{V}, V_B = -0.5\text{V}, R_L = 1\text{k}\Omega$	-4.9			V	
Output voltage low level		V_{OL}	$V_{CC} = -5\text{V}, V_B = -2.5\text{V}, R_L = 1\text{k}\Omega$			-0.2	V	
			$V_{CC} = -5\text{V}, V_B = -3.5\text{V}, R_L = 1\text{k}\Omega$			-0.2		
			$V_{CC} = -5\text{V}, V_B = -10\text{V}, R_L = 1\text{k}\Omega$			-0.2		
			$V_{CC} = -5\text{V}, V_B = -6\text{V}, R_L = 1\text{k}\Omega$			-0.2		
Transition frequency		f_T	$V_{CB} = -10\text{V}, I_E = 1\text{mA}, f = 200\text{MHz}$		80		MHz	
			$V_{CB} = -10\text{V}, I_E = 1\text{mA}, f = 200\text{MHz}$		150			
Input resistance	UN5111/5114/5115	R_i		(-30%)		10	(+30%)	k Ω
	UN5112/5117/511T					22		
	UN5113/5110/511D/511E					47		
	UN5116/511F/511L/511N/511Z					4.7		
	UN5118					0.51		
	UN5119					1		
	UN511H/511M/511V					2.2		


* h_{FE} rank classification (UN5115/5116/5117/5110)

Rank	Q	R	S
h_{FE}	160 to 260	210 to 340	290 to 460







■ Electrical Characteristics (continued) (Ta=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit
Resis- tance ratio	UN5111/5112/5113/511L	R ₁ /R ₂		0.8	1.0	1.2	
	UN5114			0.17	0.21	0.25	
	UN5118/5119			0.08	0.1	0.12	
	UN511D				4.7		
	UN511E				2.14		
	UN511F/511T				0.47		
	UN511H			0.17	0.22	0.27	
	UN511M				0.047		
	UN511N				0.1		
	UN511V				1.0		
	UN511Z				0.21		







Common characteristics chart

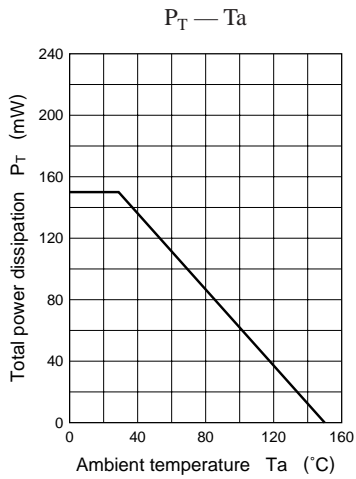




Characteristics charts of UN5111

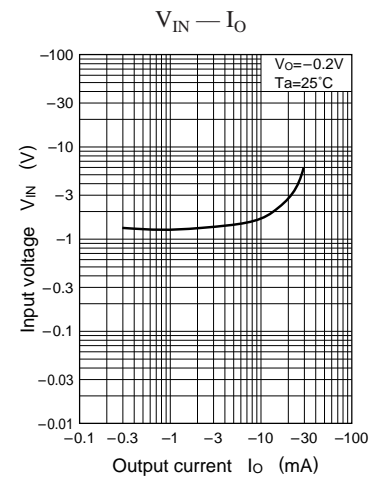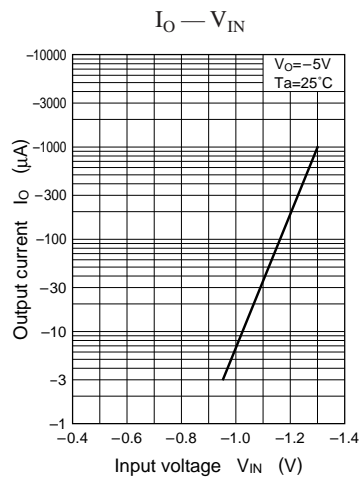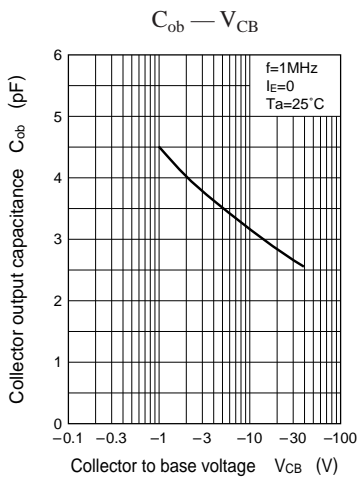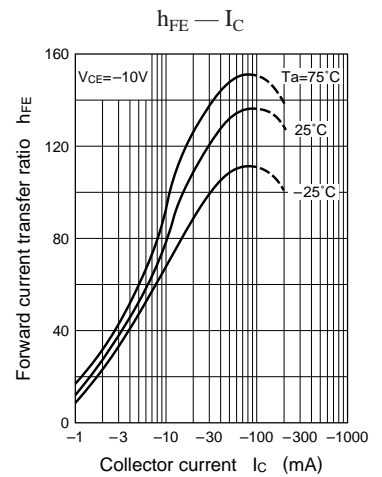
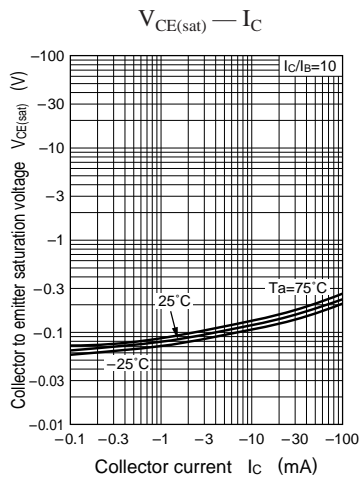
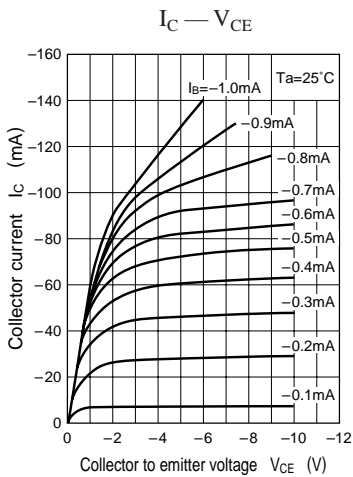


Characteristics charts of UN5112

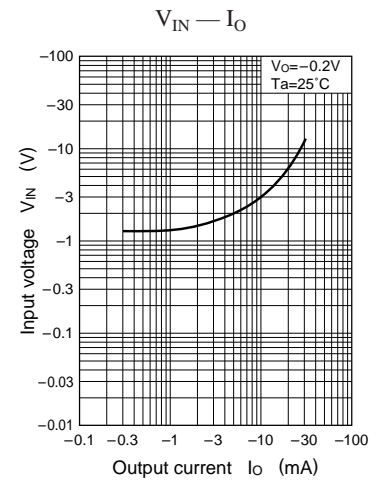
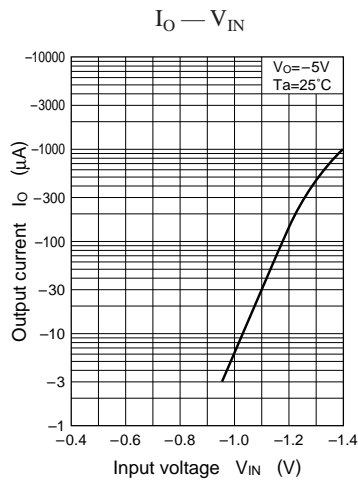
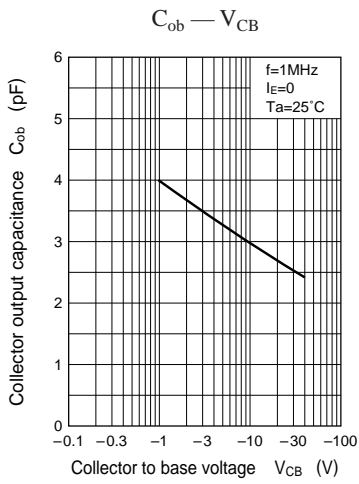
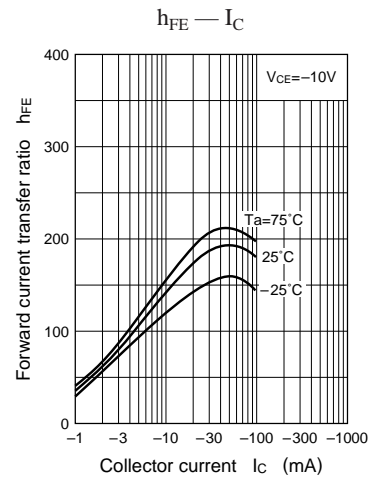
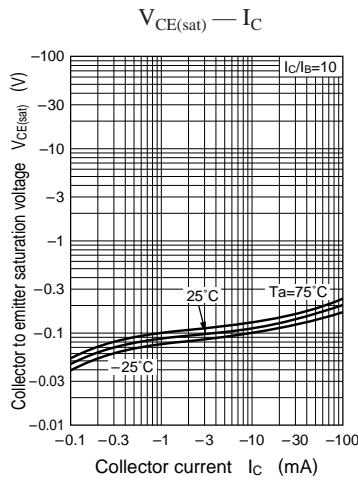
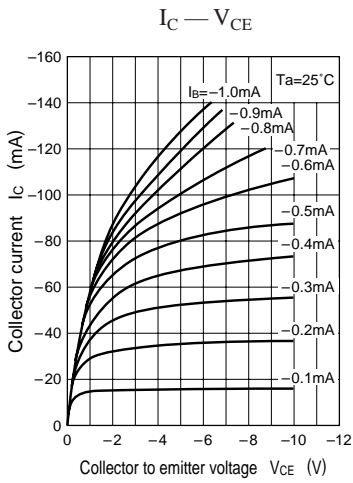


Characteristics charts of UN5113




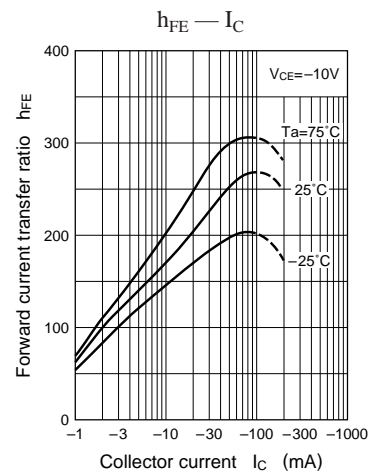
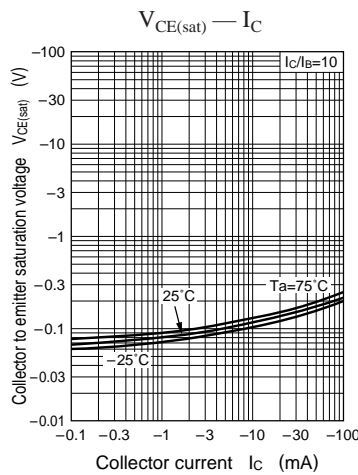
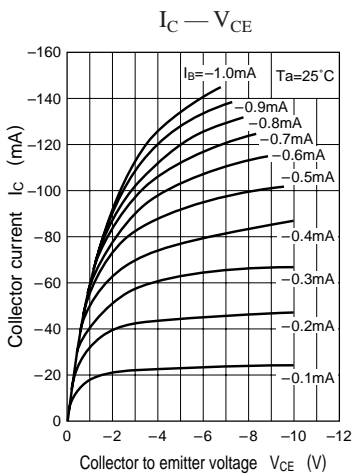


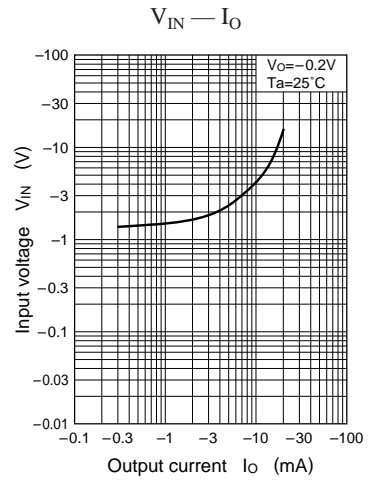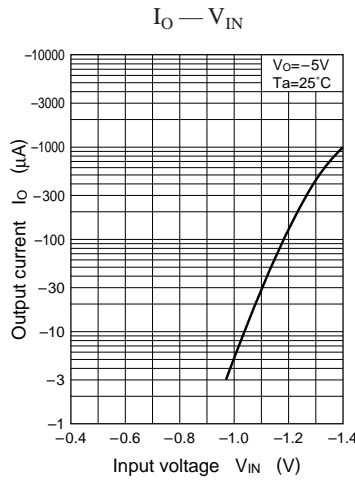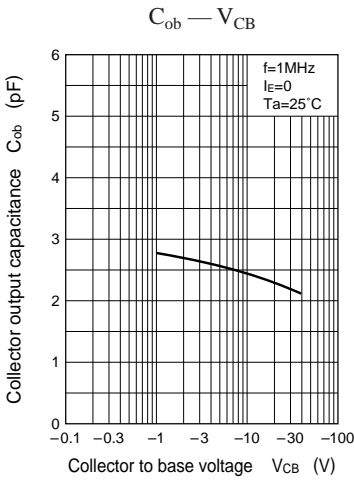




Characteristics charts of UN5114

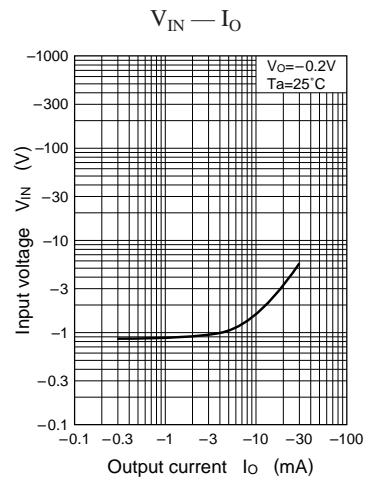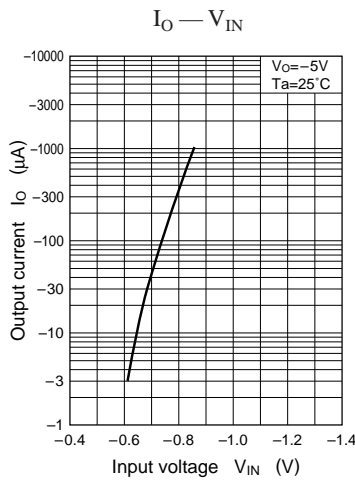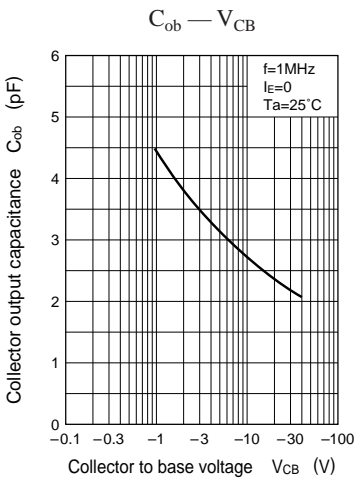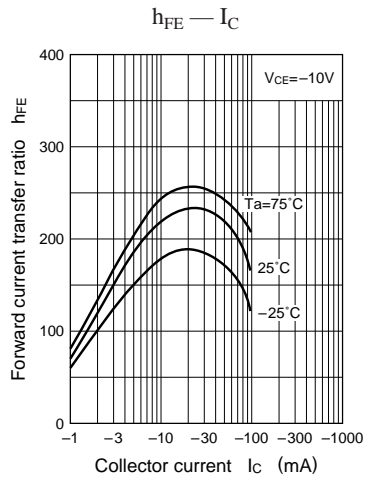
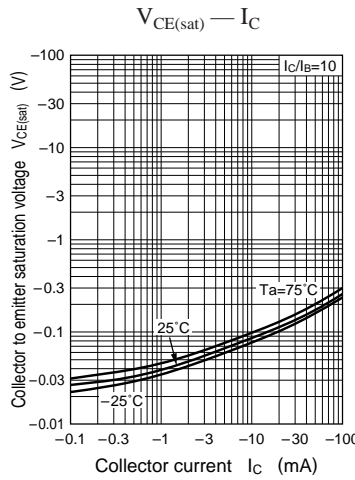
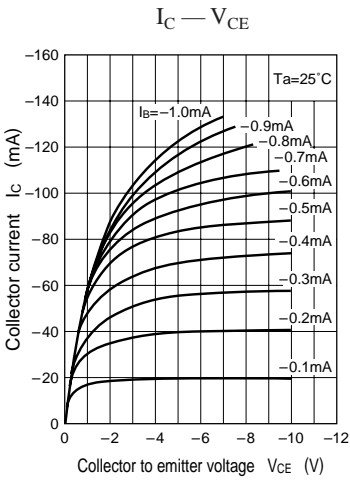


Characteristics charts of UN5115

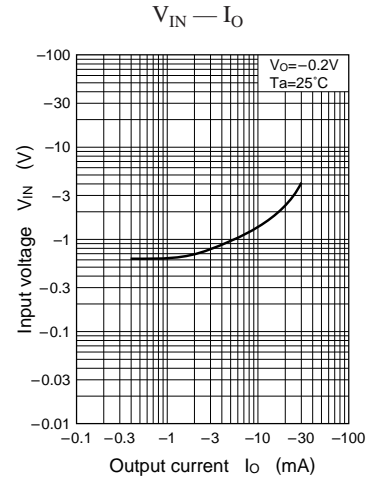
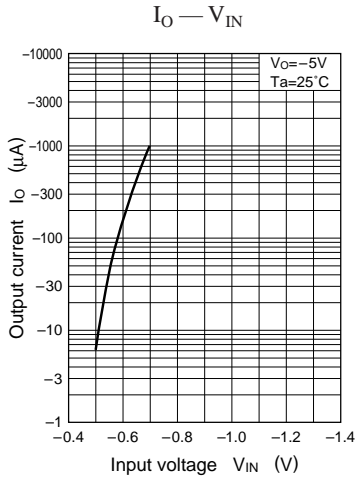
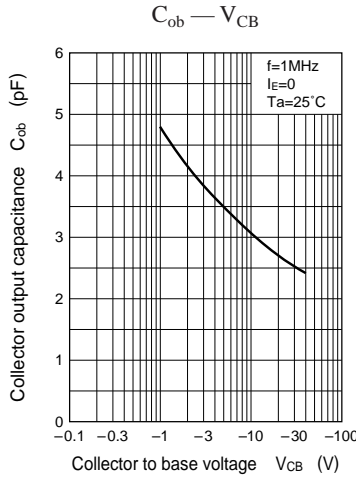
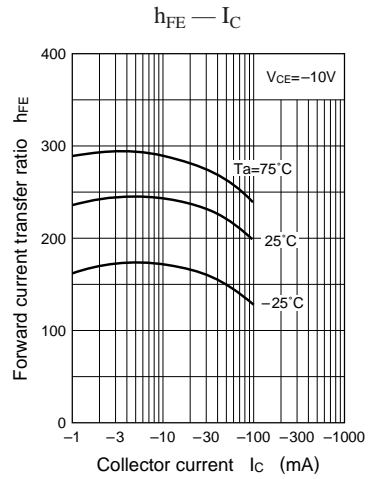
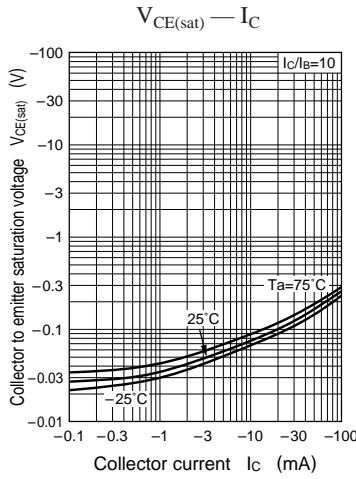
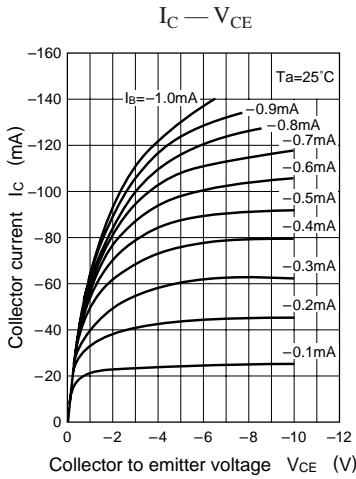


Characteristics charts of UN5116




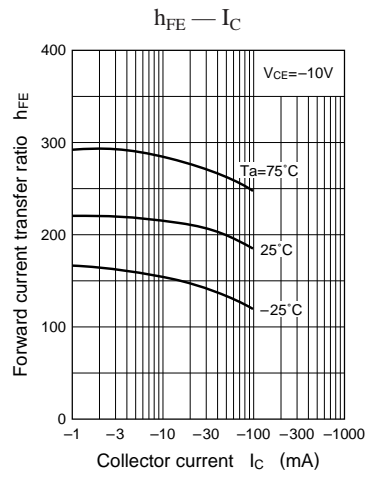
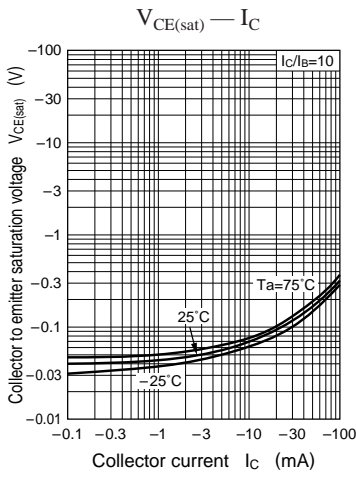
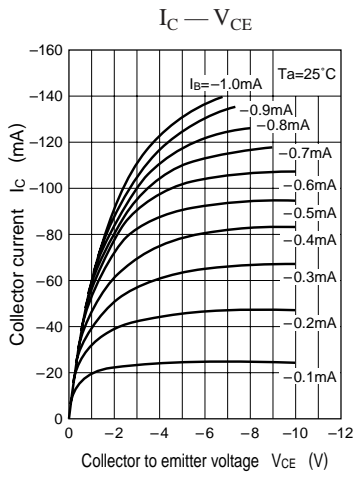


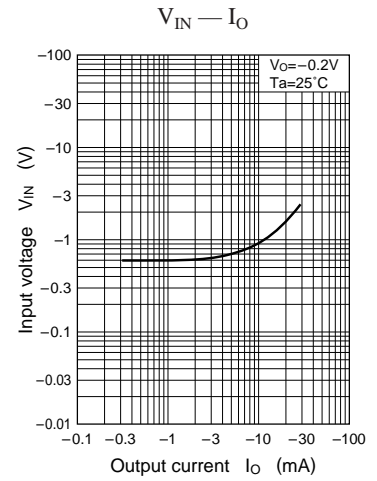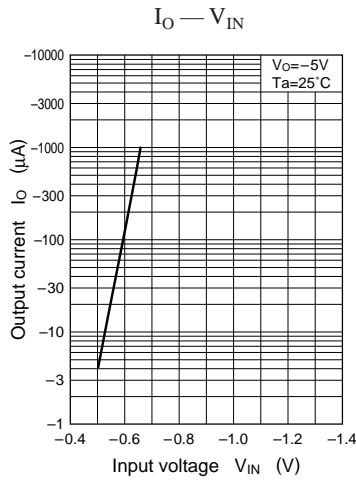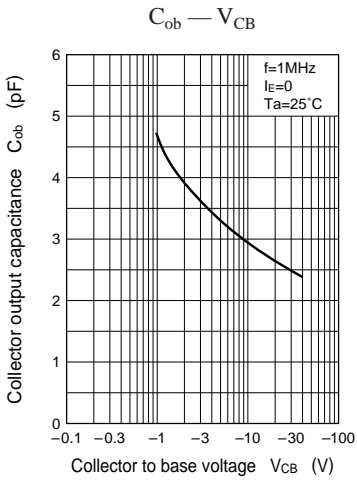




Characteristics charts of UN5117

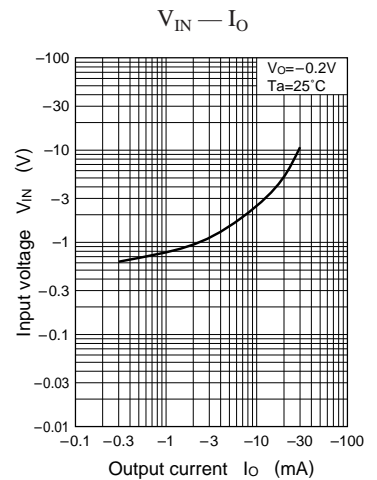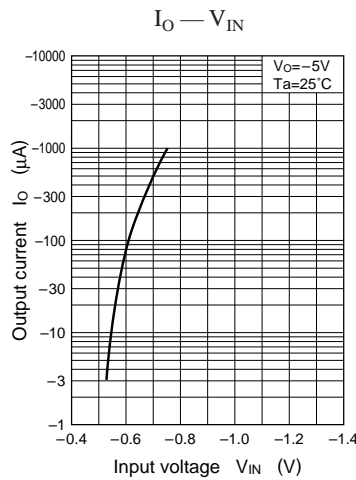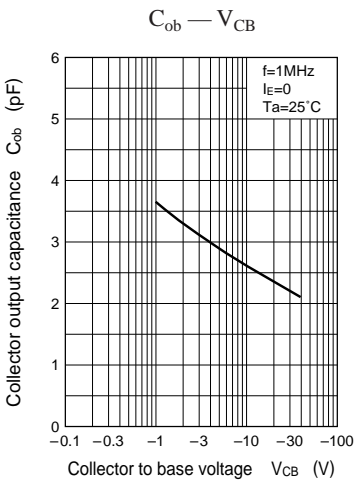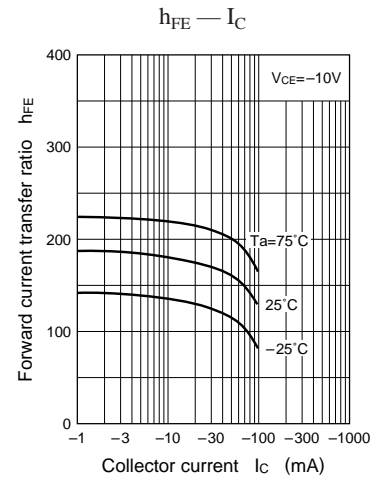
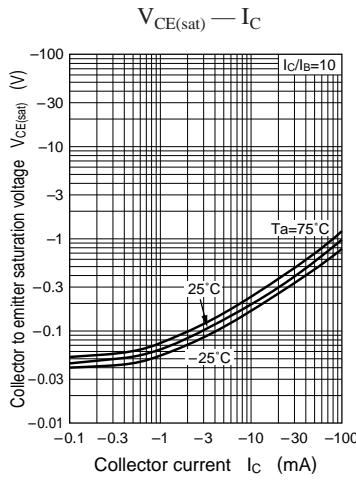
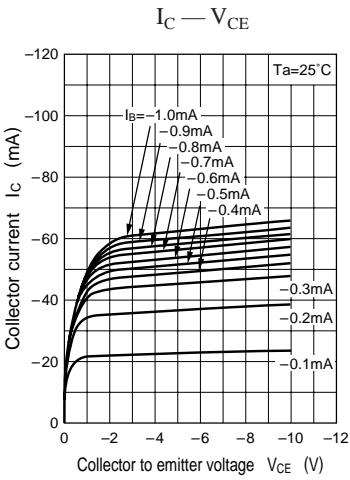


Characteristics charts of UN5118

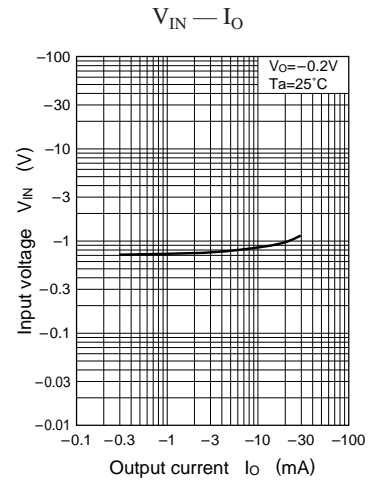
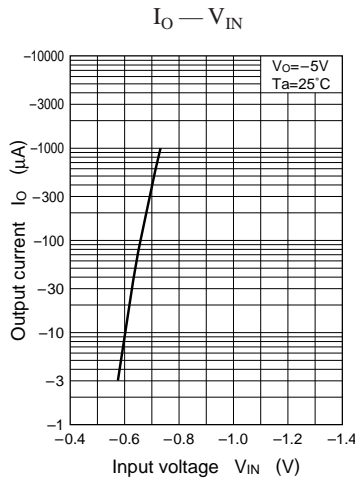
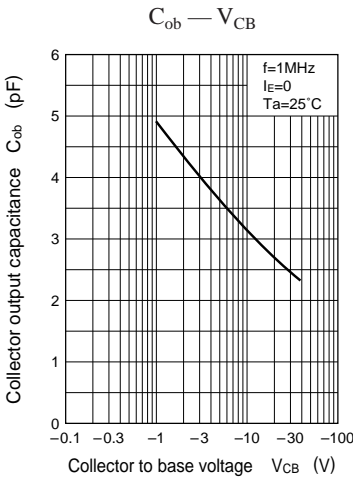
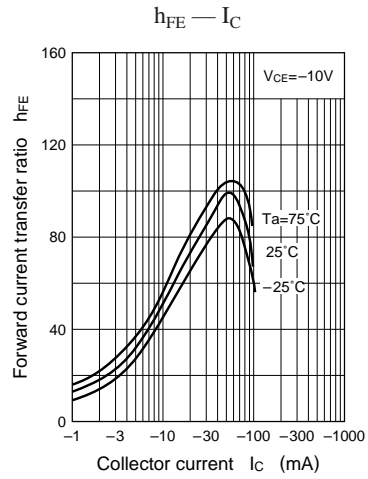
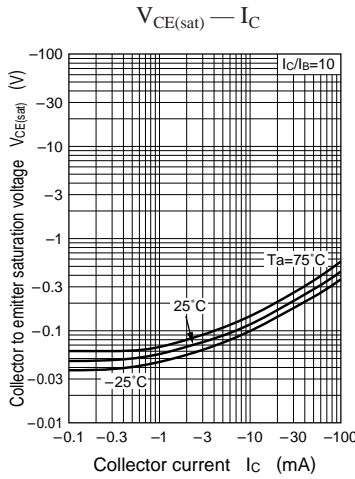
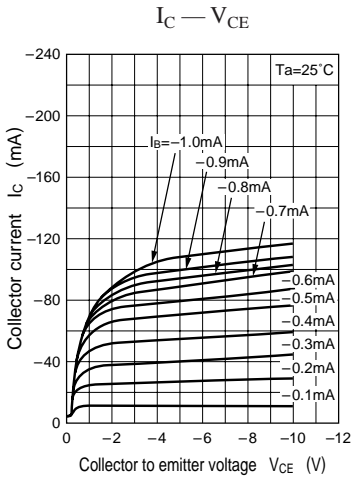


Characteristics charts of UN5119

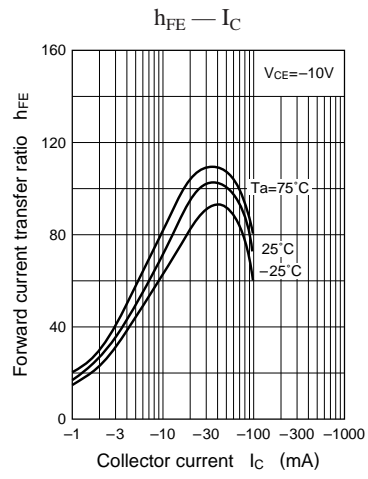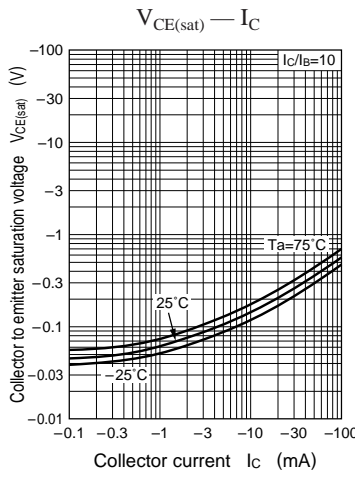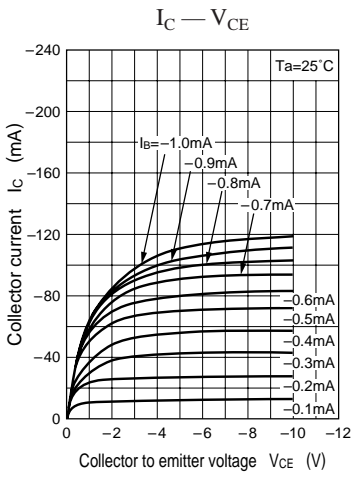


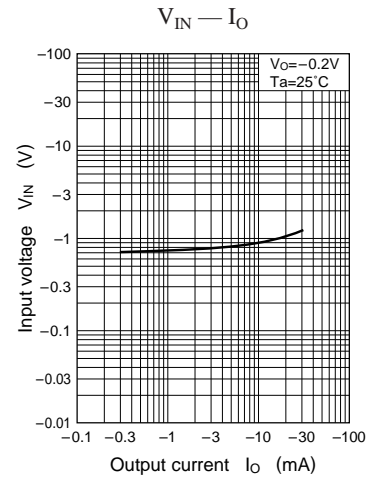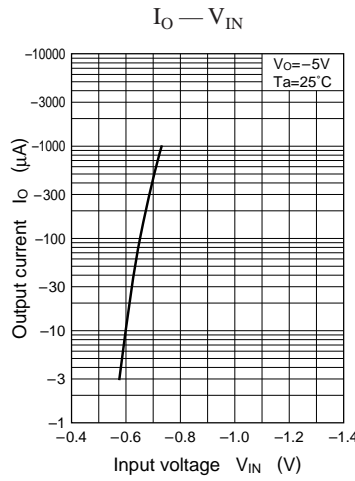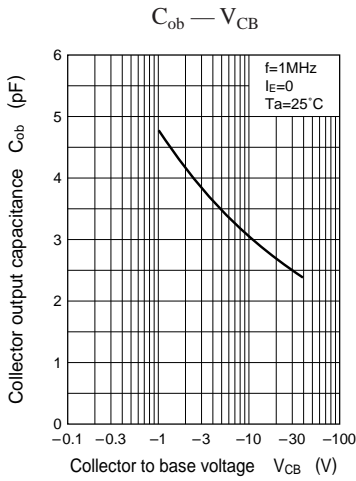


Characteristics charts of UN5110

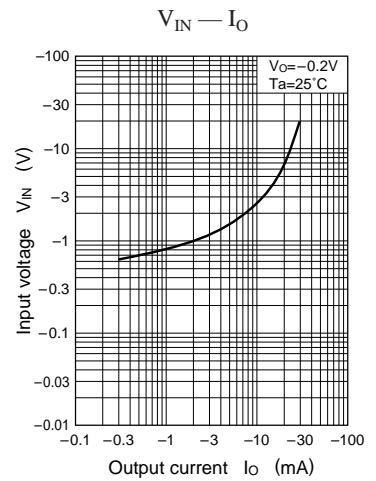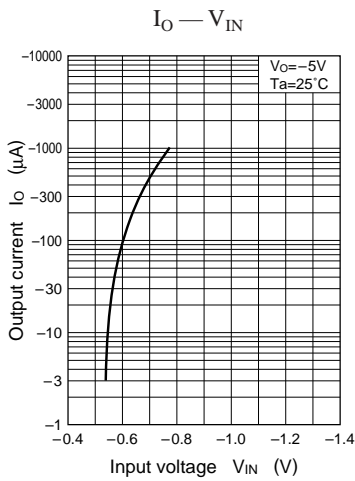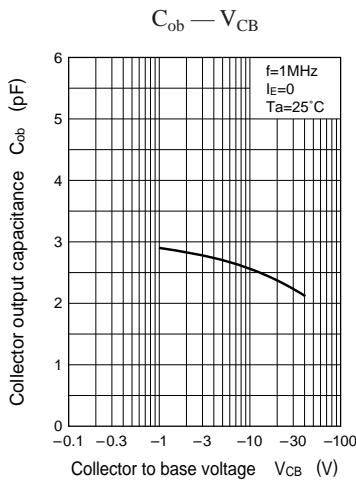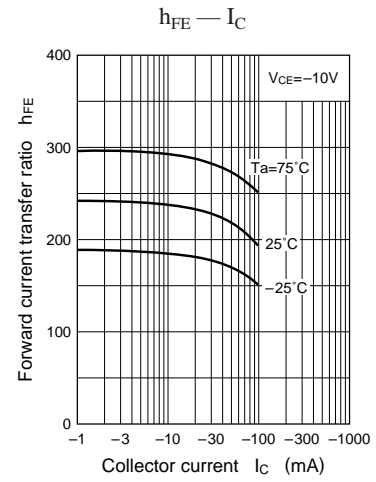
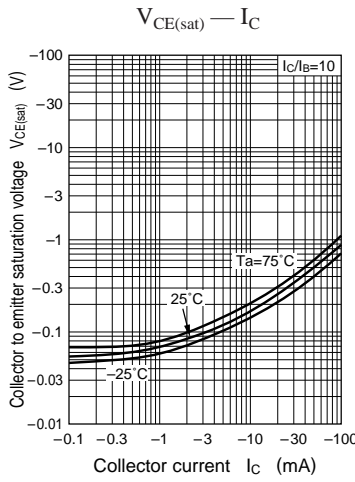
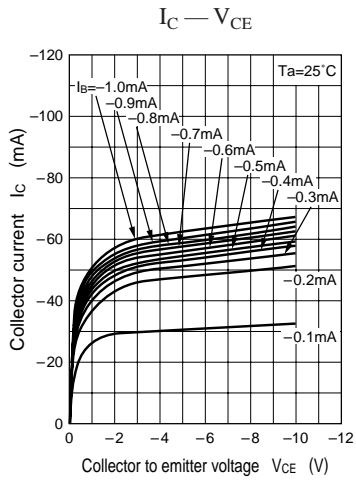


Characteristics charts of UN511D






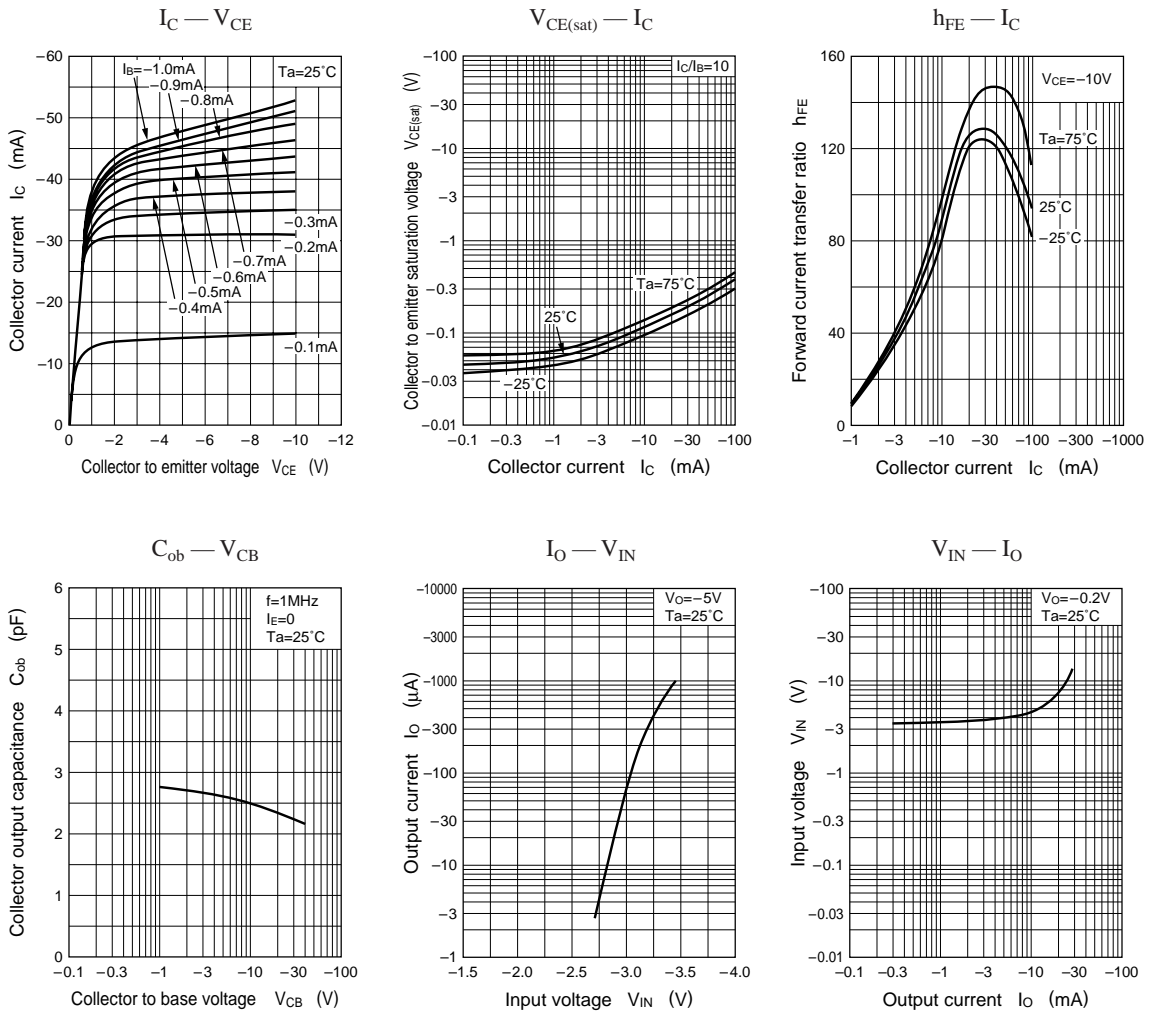


Characteristics charts of UN511E





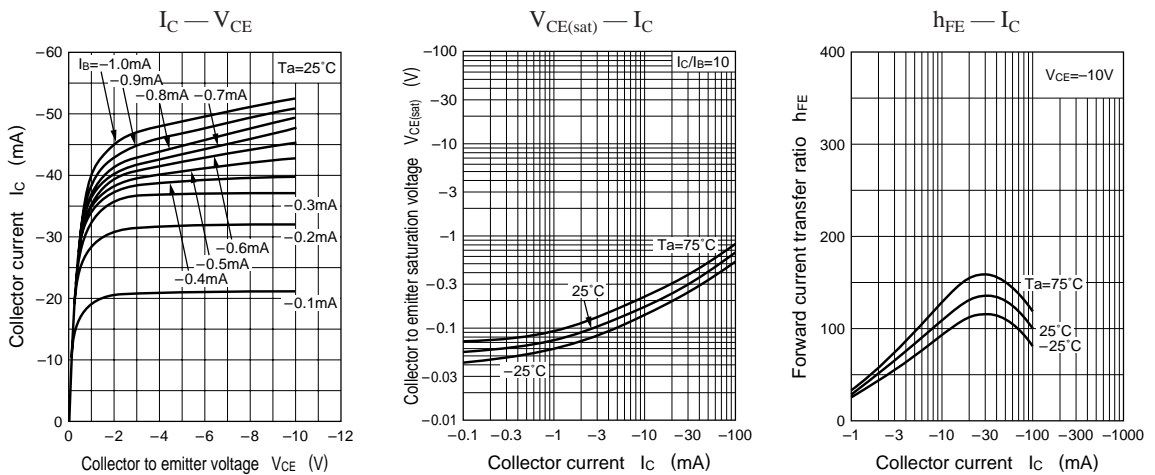


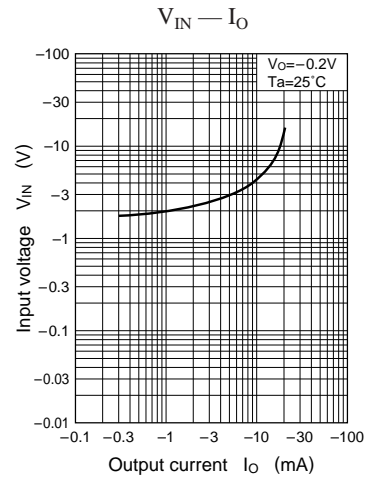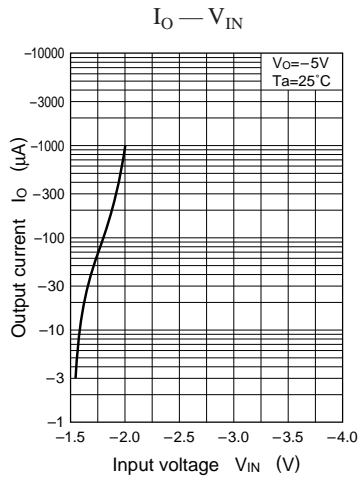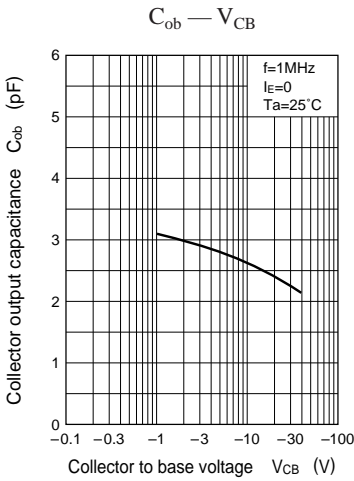




Characteristics charts of UN511F

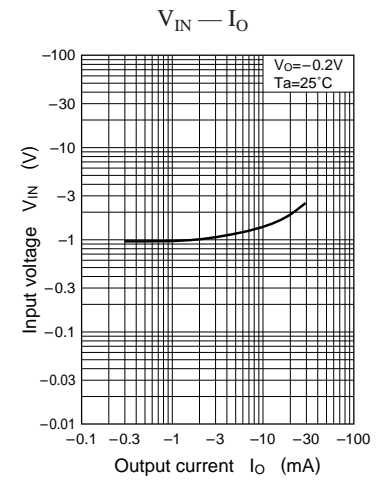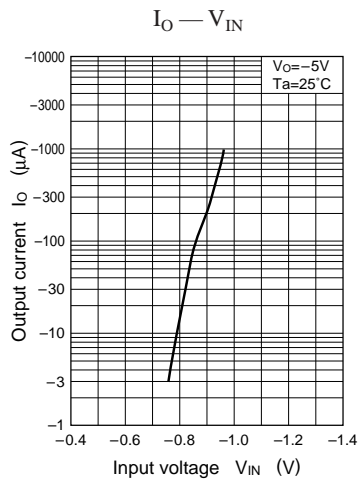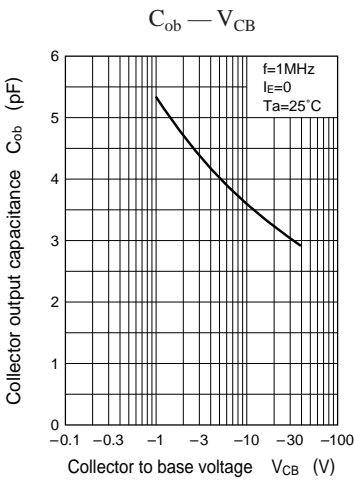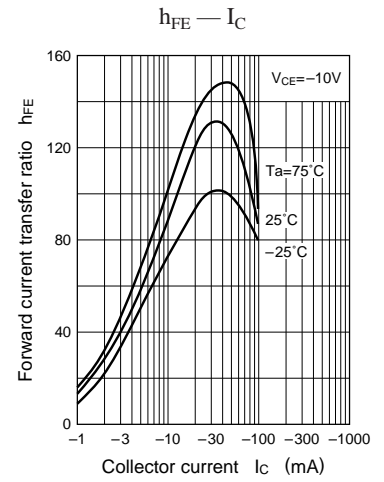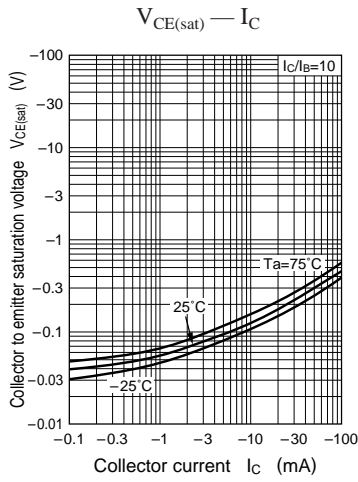
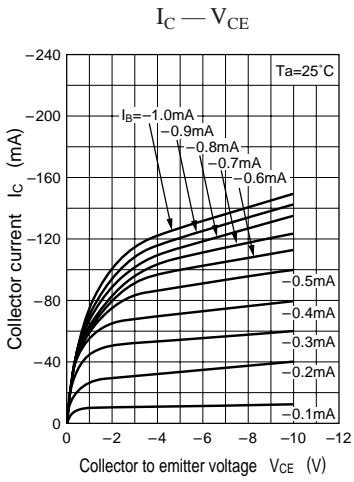


Characteristics charts of UN511H


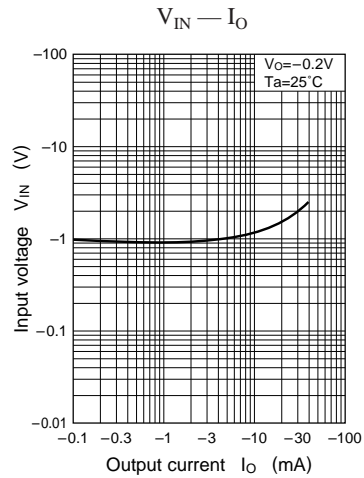
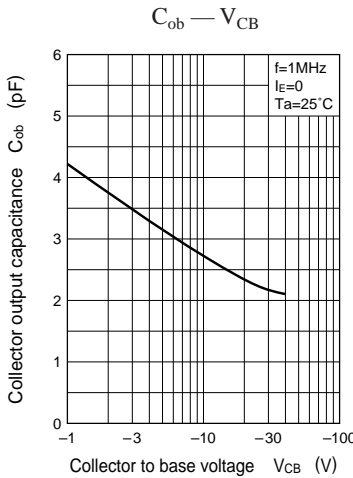
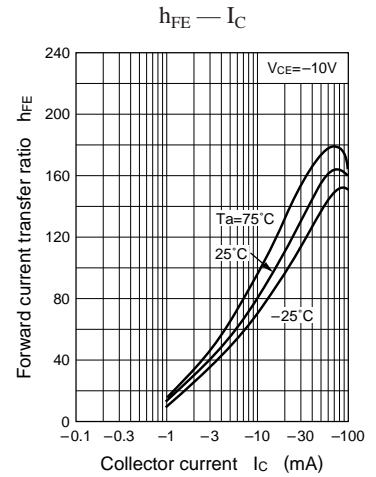
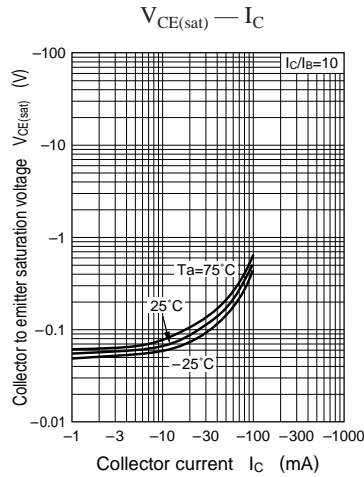
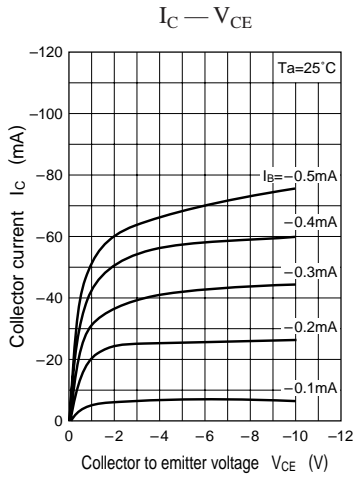


Characteristics charts of UN511L




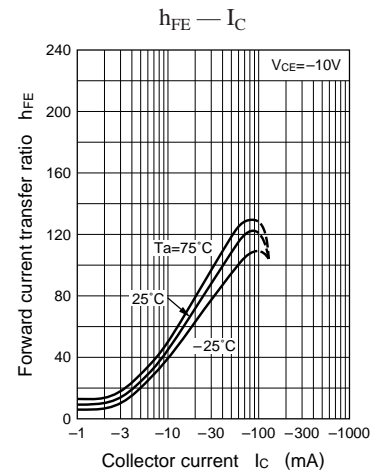
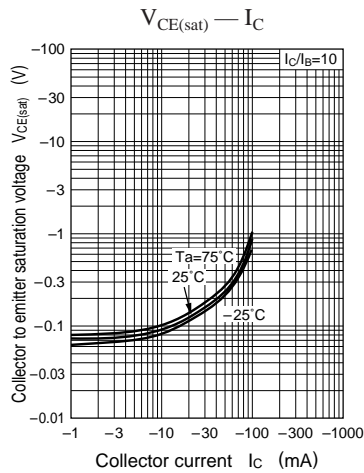
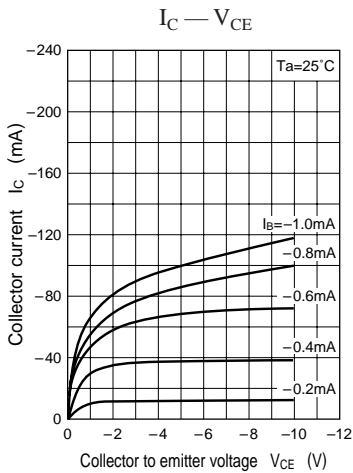


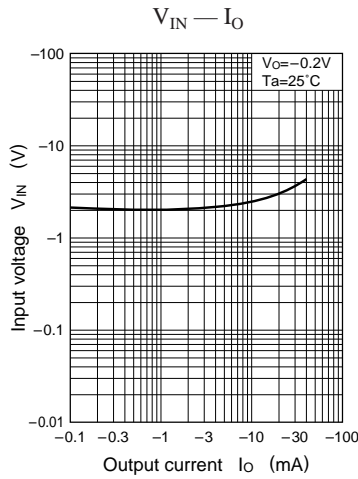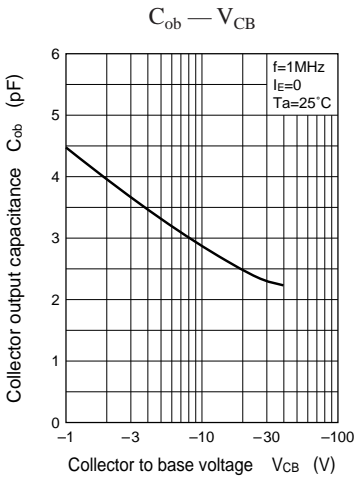




Characteristics charts of UN511M

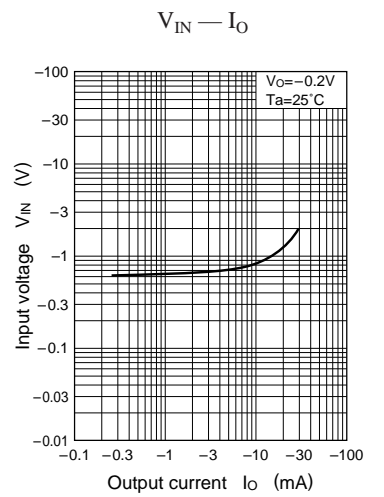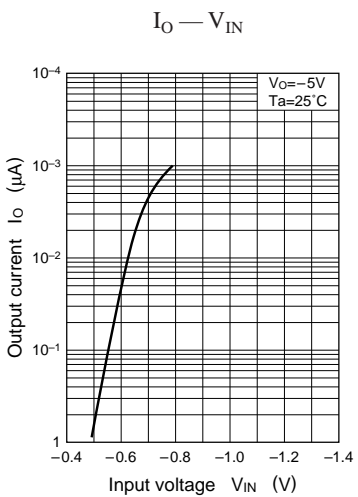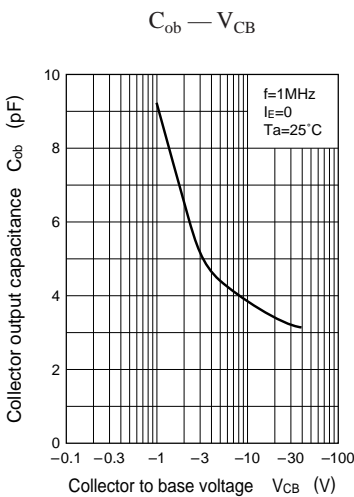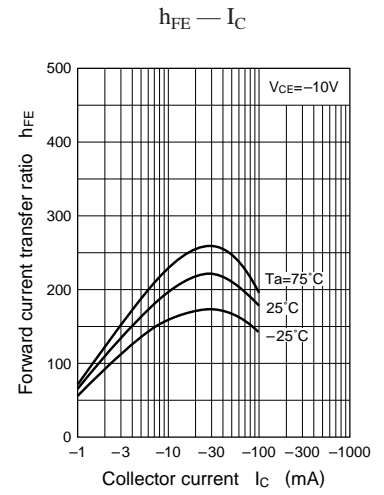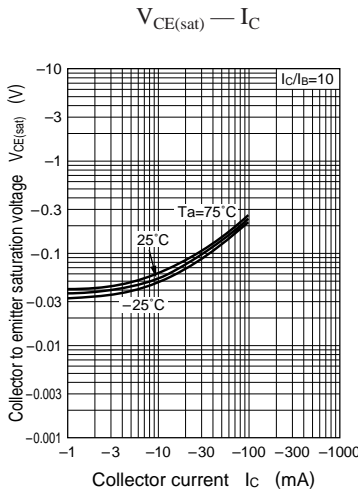
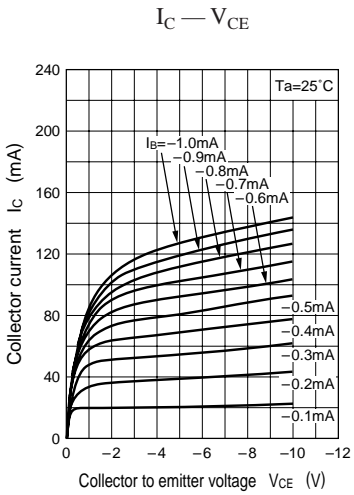


Characteristics charts of UN511N

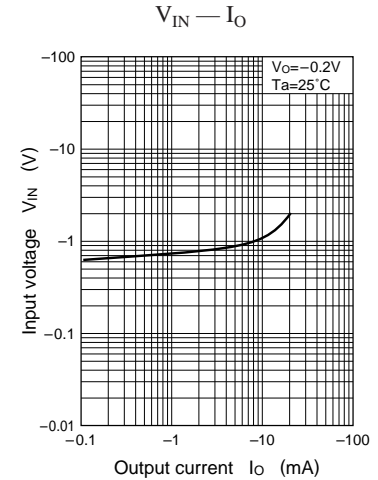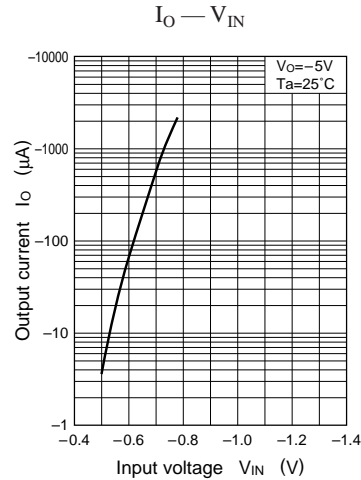
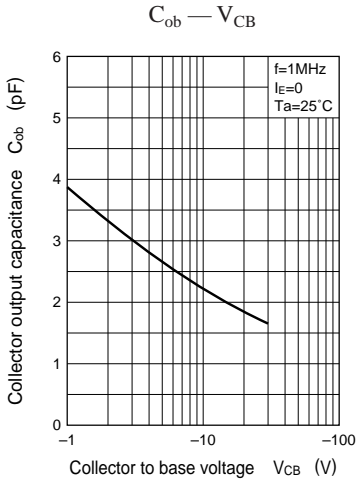
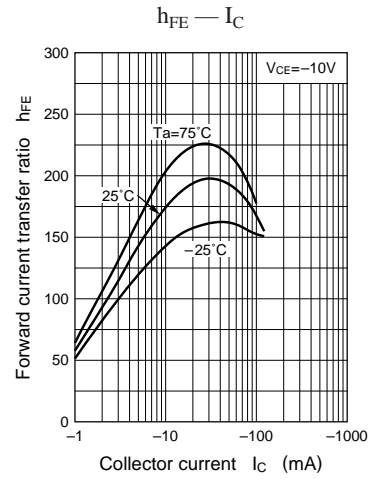
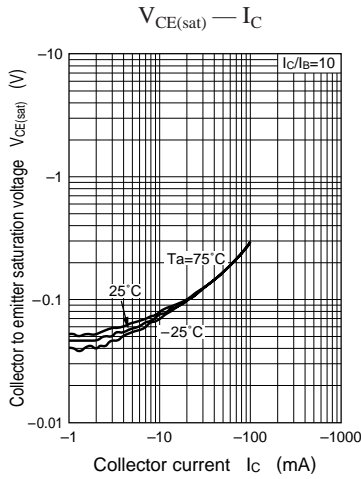
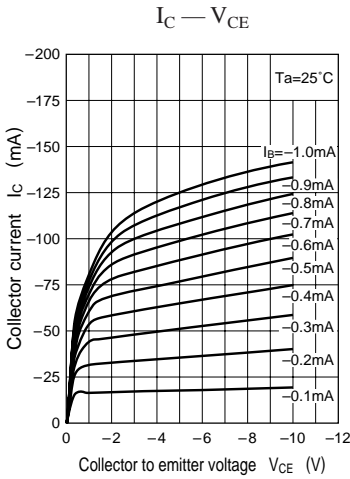


Characteristics charts of UN511T

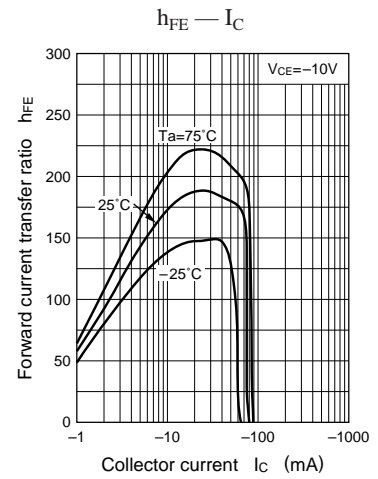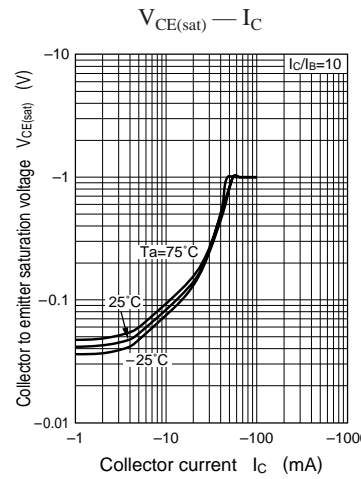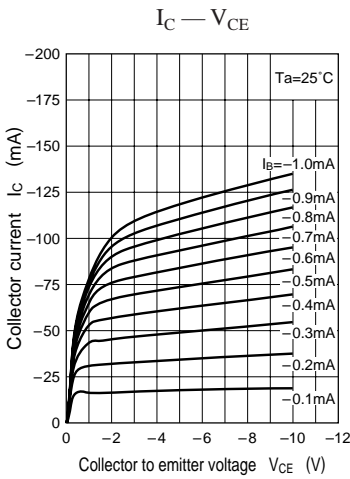

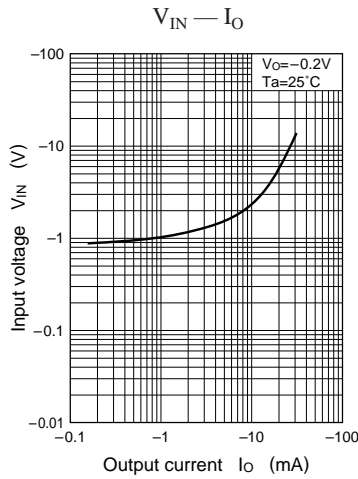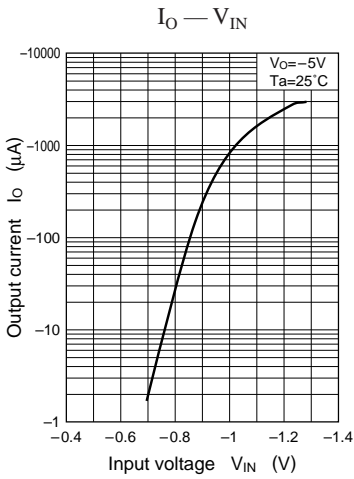

Characteristics charts of UN511V

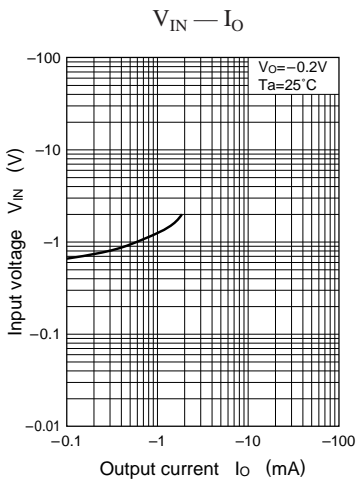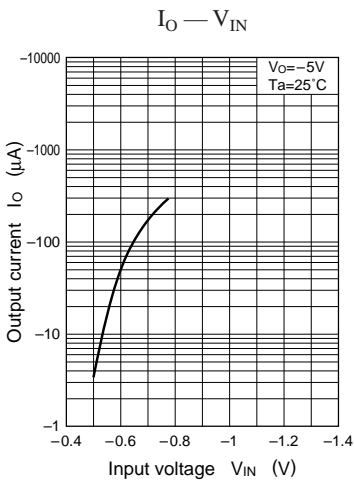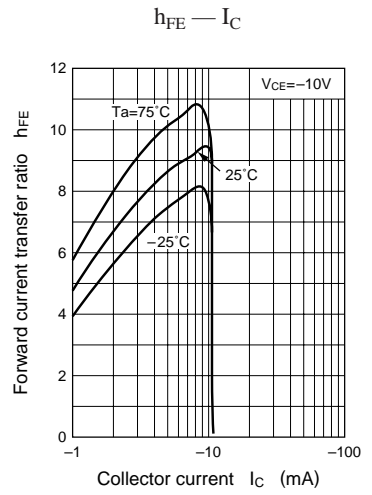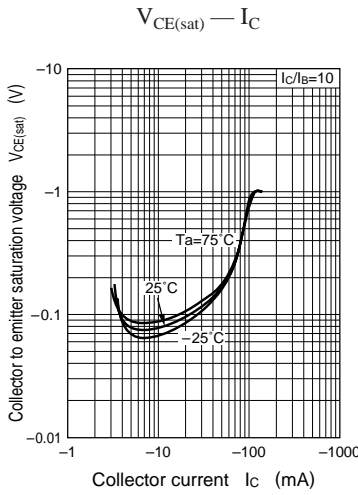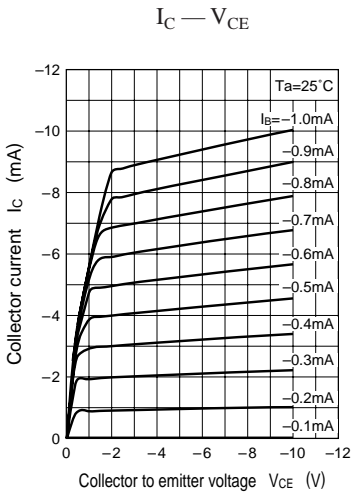

Characteristics charts of UN511Z

